



Release Notes for StarOS™ Software Version 21.11.4

First Published: June 12, 2019

Last Updated: June 12, 2019

Introduction

This Release Notes identify changes and issues related to this software release. This emergency release is based on release 21.11.3. This Release Notes is applicable to the ASR5500, VPC-SI, and VPC-DI platforms.

Release Package Version Information

| Software Packages | Version |
|-------------------|----------------------|
| StarOS packages | 21.11.4, build 72032 |

Descriptions for the various packages provided with this release are located in [Release Package Descriptions](#).

Feature and Behavior Changes

The following features and/or behavior changes have been introduced in this emergency release.

Refer to the [Release Change Reference](#) for a complete list of feature and behavior changes associated with the software release on which this emergency release is based.

Related Documentation

For a complete list of documentation available for this release, go to <http://www.cisco.com/c/en/us/support/wireless/asr-5000-series/products-installation-and-configuration-guides-list.html>.

Installation and Upgrade Notes

This Release Note does not contain installation and upgrade instructions. Refer to the existing installation documentation for specific installation and upgrade considerations.

Firmware Updates


There are no firmware upgrades required for this release.

Software Integrity Verification

To verify the integrity of the software image you have from Cisco, you can validate the SHA512 checksum information against the checksum identified by Cisco for the software.

Image checksum information is available through the following mechanisms:

- Cisco.com Software Download Details: To find the checksum, hover the mouse pointer over the software image you have downloaded.

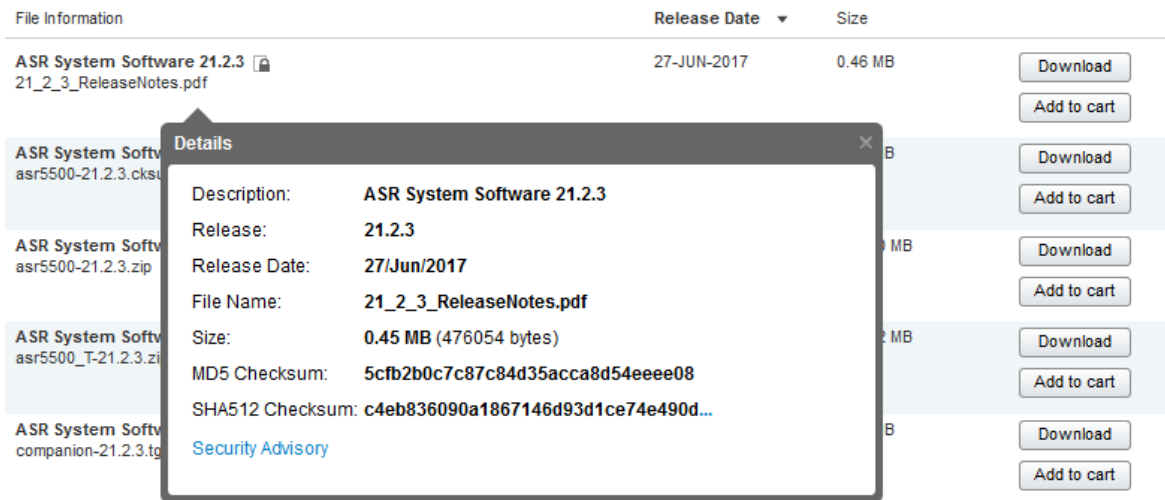

At the bottom you find the SHA512 checksum, if you do not see the whole checksum you can expand it by pressing the "..." at the end.

- .cksums file: A file containing software image checksum information is distributed with the image files. The naming convention for this file is:

`<product>-<version>.cksums`

Example: `asr5500-21.4.0.cksums`

To validate the information, calculate a SHA512 checksum using the information in [Table 1](#) and verify that it matches either the one provided on the software download page.

To calculate a SHA512 checksum on your local desktop please see the table below.

Table 1 – Checksum Calculations per Operating System

| Operating System | SHA512 checksum calculation command examples |
|-------------------|---|
| Microsoft Windows | Open a command line window and type the following command > certutil.exe -hashfile <filename>.<extension> SHA512 |
| Apple MAC | Open a terminal window and type the following command \$ shasum -a 512 <filename>.<extension> |

Open Bugs for This Release

| Operating System | SHA512 checksum calculation command examples |
|---|--|
| Linux | Open a terminal window and type the following command <pre>\$ sha512sum <filename>.<extension></pre> Or <pre>\$ shasum -a 512 <filename>.<extension></pre> |
| NOTES: <filename> is the name of the file. <extension> is the file extension (e.g. .zip or .tgz). | |

If the SHA512 checksum matches, you can be sure that no one has tampered with the software image or the image has not been corrupted during download.

If the SHA512 checksum does not match, we advise you to not attempt upgrading any systems with the corrupted software image. Download the software again and verify the SHA512 checksum again. If there is a constant mismatch, please open a case with the Cisco Technical Assistance Center.

Certificate Validation

StarOS software images are signed via x509 certificates. Please view the .README file packaged with the software for information and instructions on how to validate the certificates.

NOTE: Image signing is not currently supported for VPC-SI and/or VPC-DI software packages.

Open Bugs for This Release

The table below highlights the known bugs that were found in, and/or that remain open in this software release.

NOTE: This software release may contain open bugs first identified in other releases. Additional information for all open bugs for this release are available in the [Cisco Bug Search Tool](#).

| Bug ID | Headline | Product Found* |
|------------|---|----------------|
| CSCvm83524 | [BP-CUPS] Assert failure at egtpc_handle_user_sap_event() | cups-cp |
| CSCvk63958 | [PLT-CUPS-ICUPS-VPP]Single user performance blocked due to VPP_MAIN is in over state | cups-up |
| CSCvn14097 | [BP-CUPS] Access Type of Pure-S call is displayed as 'Unknown' | cups-up |
| CSCvn14202 | [BP-CUPS-VPP]Delay charging is having issues with Tear Down packets. | cups-up |
| CSCvn39767 | Unexpected session manager restart- _do_acs_usertcp_event_handler() | pdn-gw |
| CSCvo32237 | [BP-ICUPS]: some UDP streams going to passive post ICSR switchover | pdn-gw |
| CSCvm65884 | PGW-Around 5% increase in sessmgr memory in 21.11.M0.70658 wrt 21.9.M0.69679 baseline CEPS test | pdn-gw |
| CSCvm83968 | [CUSP] need to handle interworking of URL-readdressing and CUSP feature. | pdn-gw |

Resolved Bugs for This Release

| Bug ID | Headline | Product Found* |
|---|---|----------------|
| CSCvm82008 | [BP-ICUPS]:HTTP volume based offload is not happening after PDN update | sae-gw |
| CSCvn35333 | [BP-ICUPS] uplinkdata and downlinkdata volume values are not correct in PGWCDR after XHDR insertion | sae-gw |
| CSCvn76706 | Sessmgr restarts observed in Cisco ASR5500 after starting the callmodel | sae-gw |
| CSCvi12541 | bfdlc facility instances in warn state on active and standby chassis | sae-gw |
| CSCvn23275 | [PLT-ICUPS] Both DPC2 rebooted upon planned migration | staros |
| CSCvm98426 | [PLT-ICUPS-VPP] Not able to send fragmented packet through VPP. | staros |
| CSCvp63312 | confdmgr restart on DI reload | staros |
| * Information in the "Product Found" column identifies the product in which the bug was initially identified. | | |

Resolved Bugs for This Release

The table below highlights the known bugs that are resolved in this specific software release.

NOTE: This software release may contain bug fixes first introduced in other releases. Additional information for all resolved bugs for this release are available in the [Cisco Bug Search Tool](#).

| Bug ID | Headline | Product Found* |
|---|---|----------------|
| CSCvk67837 | MME is not taking any action when received eNBStatustransfer with multiple E-RABs | mme |
| CSCvp55960 | 5G UE Radio capability change update not occurring | mme |
| CSCvp69273 | Voice call is dropped when MME cancels SRVCC after receiving Delete Bearer request for QCI1 | mme |
| CSCvp37128 | MME not sending the ULR after activity from UE in ECM-CONNECTED | mme |
| CSCvj49371 | StarOS improperly handling traffic selectors when responding to IKEv2 initiator request | staros |
| * Information in the "Product Found" column identifies the product in which the bug was initially identified. | | |

Operator Notes

StarOS Version Numbering System


The output of the show version command displays detailed information about the version of StarOS currently running on the ASR 5x00 or Cisco Virtualized Packet Core platform.

Prior to release 16.1, the *Image Version* field displayed a branch of software including the build number, for example "16.0 (55435)". Subsequent releases of software for the major release differed only in build number. Lab Quality/EFT releases versus deployment releases also differed only in build number.


From release 16.1 onwards, the output of the show version command, as well as the terminology used to describe the Build Version Number fields, has changed. Additionally, show version will display slightly different information depending on whether or not a build is suitable for deployment.

Operator Notes

The Version Build Number for releases between 16.1 and 21.0 include a major, maintenance, and emergency release number, for example “16.1.2”.

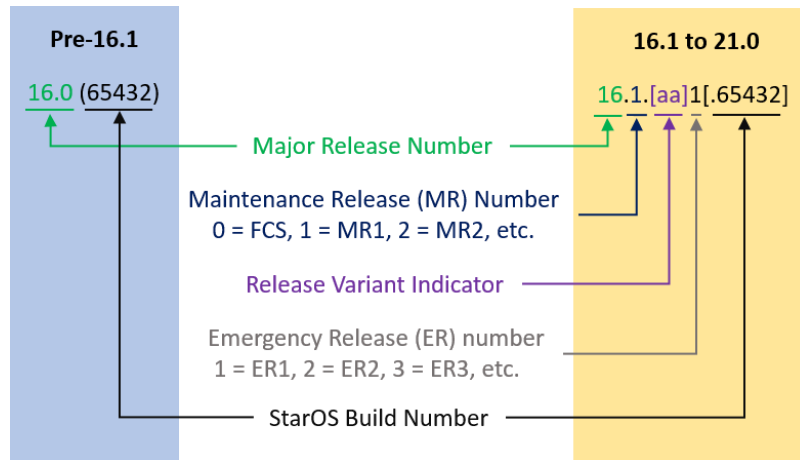

The Version Build Number for releases 21.1 and later include a major and emergency release number, for example, “21.1.1”.

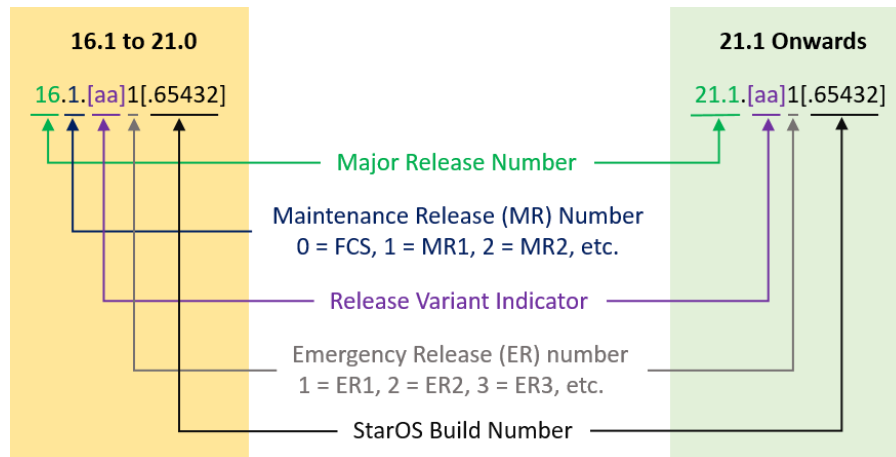

In either scenario, the appropriate version number field increments after a version has been released. The new version numbering format is a contiguous sequential number that represents incremental changes between releases. This format will facilitate identifying the changes between releases when using Bug Search Tool to research software releases.

Release Package Descriptions

Table 2 lists provides descriptions for the packages that are available with this release.

Table 2 - Release Package Information

| Package | Description |
|-----------------------|---|
| ASR 5500 | |
| asr5500-<release>.bin | A zip file containing the signed ASR 5500 software image, the signature file, a verification script, the x509 certificate, and a README file containing information on how to use the script to validate the certificate. |

| Package | Description |
|--|--|
| asr5500_T- <release>.bin | A zip file containing the signed, trusted ASR 5500 software image, the signature file, a verification script, the x509 certificate, and a README file containing information on how to use the script to validate the certificate. |
| VPC-DI | |
| qvmc-di-<release>.bin | The VPC-DI binary software image which is used to replace a previously deployed image on the flash disk in existing installations. |
| qvmc-di_T- <release>.bin | The trusted VPC-DI binary software image which is used to replace a previously deployed image on the flash disk in existing installations. |
| qvmc-di-<release>.iso | The VPC-DI ISO used for new deployments a new virtual machine is manually created and configured to boot from a CD image. |
| qvmc-di_T- <release>.iso | The trusted VPC-DI ISO used for new deployments a new virtual machine is manually created and configured to boot from a CD image. |
| qvmc-di-template- vmware-<release>.tgz | The VPC-DI binary software image that is used to on-board the software directly into Vmware. |
| qvmc-di-template- vmware_T- <release>.tgz | The trusted VPC-DI binary software image that is used to on-board the software directly into Vmware. |
| qvmc-di-template- libvirt-kvm- <release>.tgz | This is an archive that includes the same VPC-DI ISO identified above, but additional installation files for using it on KVM. |
| qvmc-di-template- libvirt-kvm_T- <release>.tgz | This is an archive that includes the same trusted VPC-DI ISO identified above, but additional installation files for using it on KVM. |
| qvmc-di- <release>.qcow2.tgz | The VPC-DI binary software image in a format that can be loaded directly with KVM using an XML definition file, or with OpenStack. |
| qvmc-di_T- <release>.qcow2.tgz | The trusted VPC-DI binary software image in a format that can be loaded directly with KVM using an XML definition file, or with OpenStack. |
| VPC-SI | |
| qvmc-si-<release>.bin | The VPC-SI binary software image which is used to replace a previously deployed image on the flash disk in existing installations. |
| qvmc-si_T- <release>.bin | The trusted VPC-SI binary software image which is used to replace a previously deployed image on the flash disk in existing installations. |
| qvmc-si-<release>.iso | The VPC-SI ISO used for new deployments a new virtual machine is manually created and configured to boot from a CD image. |
| qvmc-si_T- <release>.iso | The trusted VPC-SI ISO used for new deployments a new virtual machine is manually created and configured to boot from a CD image. |
| qvmc-si-template- vmware-<release>.ova | The VPC-SI binary software image that is used to on-board the software directly into Vmware. |

| Package | Description |
|--|--|
| qvmc-si-template-vmware_T-<release>.ova | The trusted VPC-SI binary software image that is used to on-board the software directly into VMware. |
| qvmc-si-template-libvirt-kvm-<release>.tgz | This is an archive that includes the same VPC-SI ISO identified above, but additional installation files for using it on KVM. |
| qvmc-si-template-libvirt-kvm_T-<release>.tgz | This is an archive that includes the same trusted VPC-SI ISO identified above, but additional installation files for using it on KVM. |
| qvmc-si-<release>.qcow2.gz | The VPC-SI binary software image in a format that can be loaded directly with KVM using an XML definition file, or with OpenStack. |
| qvmc-si_T-<release>.qcow2.gz | The trusted VPC-SI binary software image in a format that can be loaded directly with KVM using an XML definition file, or with OpenStack. |
| StarOS Companion Package | |
| companion-<release>.tgz | An archive containing numerous files pertaining to this version of the StarOS including SNMP MIBs, RADIUS dictionaries, ORBEM clients. These files pertain to both trusted and non-trusted build variants. |

Obtaining Documentation and Submitting a Service Request

For information on obtaining documentation, using the Cisco Bug Search Tool (BST), submitting a service request, and gathering additional information, see *What's New in Cisco Product Documentation*, at: <http://www.cisco.com/c/en/us/td/docs/general/whatsnew/whatsnew.html>.

Subscribe to *What's New in Cisco Product Documentation*, which lists all new and revised Cisco technical documentation, as an RSS feed and deliver content directly to your desktop using a reader application. The RSS feeds are a free service.

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

All printed copies and duplicate soft copies are considered un-Controlled copies and the original on-line version should be referred to for latest version.

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© 2019 Cisco Systems, Inc. All rights reserved.