



## **Secure Firewall Management Center REST API Quick Start Guide, Version 7.1**

**First Published:** 2021-12-01

**Last Modified:** 2021-12-01

### **Americas Headquarters**

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
<http://www.cisco.com>  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 527-0883

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

All printed copies and duplicate soft copies of this document are considered uncontrolled. See the current online version for the latest version.

Cisco has more than 200 offices worldwide. Addresses and phone numbers are listed on the Cisco website at [www.cisco.com/go/offices](http://www.cisco.com/go/offices).

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/c/en/us/about/legal/trademarks.html>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© Cisco Systems, Inc. All rights reserved.



## CONTENTS

---

### CHAPTER 1

#### About the Management Center REST API 1

- About the Management Center REST API 1
- Whats New in 7.1 1
- Enabling the REST API 4
- Best Practices 5
- Additional Resources 5

---

### CHAPTER 2

#### About the API Explorer 7

- About the API Explorer 7
- Authentication to the API Explorer 7
  - Logging into API Explorer 8
  - Setting the Domain 8
- Accessing the Legacy API Explorer 8
- Obtaining Sample Code with CodeGen 9
  - Downloading the Open API Spec 9
  - Generating Sample Code with the CodeGen Utility 10
- Viewing API Parameters 10

---

### CHAPTER 3

#### Connecting with a Client 13

- Authentication from a REST API Client 13
  - Requesting an Authentication Token 14
  - Refreshing an Authentication Token 15

---

### CHAPTER 4

#### Objects in the REST API 17

- Request Structure 17
- Bulk Rule Posting 19

- Response Structure 20
- Rate Limiting 22
- Payload Limiting 22
- Object Overrides 23
- Field Renaming 24
- Troubleshoot 24
  - DELETE packettracerfiles 24
- Network Map 24
  - GET netmaphosts 24
  - DELETE netmaphosts 25
  - POST netmaphosts 25
  - GET vulns 25
  - DELETE vulns 25
  - POST vulns 26
- Audit Services 26
  - GET auditrecords 26
- Users 26
  - GET authroles 26
  - GET SSO Config 26
  - PUT SSO Config 27
  - GET duoconfigs 27
  - PUT duoconfigs 27
- Deployment Services 27
  - GET deployabledevices 27
  - GET deployments 28
  - GET pendingchanges 28
  - POST deploymentrequests 28
  - GET jobhistories 28
  - PUT jobhistories 28
  - GET downloadreports 29
  - POST emailreports 29
  - POST rollbackrequests 29
- Device Group Services 29
  - DELETE devicegrouprecords 29

PUT devicegrouprecords	29
POST devicegrouprecords	30
GET devicegrouprecords	30
Device Clusters	30
GET fddevicecluster	30
PUT fddevicecluster	31
POST fddevicecluster	31
DELETE fddevicecluster	31
POST fdclusterreadinesscheck	32
POST fdclusterdevicecommands	32
Device HA Pair Services	32
DELETE fddevicehapair	32
PUT fddevicehapair	33
POST fddevicehapairs	33
GET fddevicehapairs	33
DELETE failoverinterfacemacaddressconfigs	33
GET failoverinterfacemacaddressconfigs	34
POST failoverinterfacemacaddressconfigs	34
PUT failoverinterfacemacaddressconfigs	34
GET monitoredinterfaces	35
PUT monitoredinterfaces	35
Health Services	35
GET tunnelstatuses	35
GET tunnelsummaries	35
GET Health Alerts	36
GET Health Metrics	36
Chassis	36
GET fmcmanagedchassis	36
GET networkmodules	36
PUT networkmodules	37
PUT syncnetworkmodule	37
GET chassisinterfaces	37
GET networkmodules	37
Device Services	38

POST copyconfigrequests	38
POST exports	38
POST imports	38
GET bgp routing	38
PUT bgp	39
POST bgp	39
DELETE bgp	39
DELETE devicerecords	39
PUT devicerecords	39
POST devicerecords	39
GET devicerecords	40
PUT fpphysicalinterfaces	40
GET fpphysicalinterfaces	40
DELETE fplogicalinterfaces	40
PUT fplogicalinterfaces	41
POST fplogicalinterfaces	41
GET fplogicalinterfaces	41
DELETE inlinesets	41
PUT inlinesets	42
POST inlinesets	42
GET inlinesets	42
GET Metrics	42
GET staticroutes	42
GET virtualrouters	43
PUT virtual routers	43
POST virtual routers	43
DELETE virtual routers	43
GET virtual BGP	44
PUT virtual bgp	44
POST virtual bgp	44
DELETE virtual bgp	44
GET virtual ipv4staticroutes	44
PUT virtual ipv4 static routes	45
POST virtual ipv4 static routes	45

DELETE virtual ipv4 static routes	45
GET virtual ipv6staticroutes	46
PUT virtual ipv6 static routes	46
POST virtual ipv6 static routes	46
DELETE virtual ipv6 static routes	47
GET virtual ospf interface	47
GET virtual ospfv2 routes	47
GET virtual static routes	48
DELETE ipv4staticroutes	48
PUT ipv4staticroutes	48
POST ipv4staticroutes	48
GET ipv4staticroutes	49
DELETE ipv6staticroutes	49
PUT ipv6staticroutes	49
POST ipv6staticroutes	49
GET ipv6staticroutes	49
GET ospf interface	50
GET ospfv2routes	50
GET ospfv3interfaces	50
GET ospfv3routes	51
GET ecmpzones	51
PUT ecmpzones	51
POST ecmpzones	51
DELETE ecmpzones	51
GET virtual ecmpzones	52
PUT virtual ecmpzones	52
POST virtual ecmpzones	52
DELETE virtual ecmpzones	52
POST packettracer	53
POST packettracerpcap	53
GET policybasedroutes	53
PUT policybasedroutes	53
POST policybasedroutes	53
DELETE policybasedroutes	54

GET virtualpolicybasedroutes 54

PUT virtualpolicybasedroutes 54

POST virtualpolicybasedroutes 54

DELETE virtualpolicybasedroutes 54

GET vteppolicies 55

PUT vteppolicies 55

POST vteppolicies 55

DELETE vteppolicies 55

DELETE virtualswitches 55

PUT virtualswitches 56

POST virtualswitches 56

GET virtualswitches 56

GET Virtual Tunnel Interfaces 56

PUT Virtual Tunnel Interfaces 57

POST Virtual Tunnel Interfaces 57

DELETE Virtual Tunnel Interfaces 57

DELETE vlaninterfaces 57

PUT vlaninterfaces 58

POST vlaninterfaces 58

GET vlaninterfaces 58

GET vniinterfaces 58

PUT vniinterfaces 59

POST vniinterfaces 59

DELETE vniinterfaces 59

PUT fpphysicalinterfaces 59

GET fpphysicalinterfaces 59

PUT physicalinterfaces 60

GET physicalinterfaces 60

GET bridgegroupinterfaces 60

POST bridgegroupinterfaces 61

PUT bridgegroupinterfaces 61

DELETE bridgegroupinterfaces 61

GET redundantinterfaces 61

POST redundantinterfaces 61



PUT redundantinterfaces	62
DELETE redundantinterfaces	62
GET bgp routing	62
GET bgp general settings	62
PUT bgpgeneralsettings	63
POST bgpgeneralsettings	63
DELETE bgpgeneralsettings	63
GET etherchannelinterfaces	63
POST etherchannelinterfaces	63
PUT etherchannelinterfaces	64
DELETE etherchannelinterfaces	64
GET subinterfaces	64
POST subinterfaces	64
PUT subinterfaces	65
DELETE subinterfaces	65
GET fpinterfacestatistics	65
POST interfaceevents	65
GET interfaceevents	65
GET commands	66
GET ftdallinterfaces	66
Intelligence Services	67
POST collections	67
POST discoveryinfo	67
GET element	67
DELETE incident	67
PUT incident	68
GET incident	68
PUT indicator	68
GET indicator	68
PUT observable	69
GET observable	69
PUT settings	69
GET settings	70
DELETE source	70

PUT source 70

POST source 70

GET source 70

Search 71

    GET globalsearch 71

    GET objectsearch 71

    GET policysearch 71

Integration Services 72

    PUT cloudeventsconfigs 72

    GET cloudeventsconfigs 72

    PUT cloudregions 72

    GET cloudregions 72

    DELETE externallookups 73

    PUT externallookups 73

    POST externallookups 73

    GET externallookups 73

    DELETE packetanalyzerdevices 73

    PUT packetanalyzerdevices 74

    POST packetanalyzerdevices 74

    GET packetanalyzerdevices 74

    GET External Storage 74

    PUT External Storage 74

    GET FMC HA Statuses 75

    GET dynamicattributesfeeds 75

    PUT dynamicattributesfeeds 75

    GET SecureX Configs 75

    PUT SecureX Configs 75

Object Services 76

    GET AnyConnect Custom Attributes 76

    GET AnyConnect Packages 76

    GET anyconnectexternalbrowserpackages 76

    GET AnyConnect Profiles 77

    GET anyprotocolportobjects 77

    GET applicationcategories 77

GET applicationfilters	77
PUT applicationfilters	78
POST applicationfilters	78
DELETE applicationfilters	78
GET applicationproductivities	78
GET applicationrisks	78
GET applications	79
GET applicationtags	79
GET applicationtypes	79
GET aspathlists	79
PUT aspathlists	80
POST aspathlists	80
DELETE aspathlists	80
POST bulkdynamicobjects	80
GET certenrollments	80
GET communitylists	81
GET Certificate Maps	81
GET continents	81
GET countries	81
DELETE dnsservergroups	82
PUT dnsservergroups	82
POST dnsservergroups	82
GET dnsservergroups	82
POST dynamicobjectmappings	82
DELETE dynamicobjectmappings	83
GET dynamicobjects	83
POST dynamicobjects	83
DELETE dynamicobjects	83
PUT dynamicobjects	84
GET mappings	84
PUT mappings	84
DELETE mappings	84
GET endpointdevicetypes	85
GET expanded community lists	85

PUT expandedcommunitylists	85
POST expandedcommunitylists	85
DELETE expandedcommunitylists	86
GET extended access lists	86
PUT extendedaccesslists	86
POST extendedaccesslists	86
DELETE extendedaccesslists	86
GET extendedcommunitylists	87
PUT extendedcommunitylists	87
POST extendedcommunitylists	87
DELETE extendedcommunitylists	87
DELETE fqdns	87
PUT fqdns	88
POST fqdns	88
GET fqdns	88
GET geolocation	89
PUT geolocations	89
POST geolocations	89
DELETE geolocations	89
GET global time zones	89
GET groupolicies	90
DELETE hosts	90
PUT hosts	90
POST hosts	90
GET hosts	90
GET hostscanpackages	91
DELETE icmpv4objects	91
PUT icmpv4objects	91
POST icmpv4objects	91
GET icmpv4objects	92
DELETE icmpv6objects	92
PUT icmpv6objects	92
POST icmpv6objects	93
GET icmpv6objects	93

DELETE ikev1ipsecproposals	93
PUT ikev1ipsecproposals	93
POST ikev1ipsecproposals	94
GET ikev1ipsecproposals	94
DELETE ikev1policies	94
PUT ikev1policies	94
POST ikev1policies	94
GET ikev1policies	95
DELETE ikev2ipsecproposals	95
PUT ikev2ipsecproposals	95
POST ikev2ipsecproposals	95
GET ikev2ipsecproposals	95
DELETE ikev2policies	96
PUT ikev2policies	96
POST ikev2policies	96
GET ikev2policies	96
DELETE interfacegroups	96
PUT interfacegroups	97
POST interfacegroups	97
GET interfacegroups	97
GET interfaceobjects	97
GET intrusionrulegroups	98
PUT intrusionrulegroups	98
POST Intrusion Rule Groups	98
DELETE Intrusion Rule Groups	98
GET intrusionrules	99
PUT intrusionrules	99
POST intrusionrules	99
DELETE intrusionrules	99
GET ipv4addresspools	99
GET ipv6addresspools	100
GET ipv4prefixlists	100
PUT ipv4prefixlists	100
POST ipv4prefixlists	101

DELETE ipv4prefixlists	101
GET ipv6prefixlists	101
PUT ipv6prefixlists	101
POST ipv6prefixlists	101
DELETE ipv6prefixlists	101
GET isesecuritygroup-tags	102
GET keychain	102
DELETE keychain	102
PUT keychain	103
POST keychain	103
GET localrealmusers	103
PUT localrealmusers	104
POST localrealmusers	104
POST localrealmusers	104
GET networkaddresses	104
DELETE networkgroups	104
PUT networkgroups	105
POST networkgroups	105
GET networkgroups	105
DELETE networks	105
PUT networks	106
POST networks	106
GET networks	106
GET packettracerpcaplist	107
POST packettracerpcapupload	107
GET policy lists	107
PUT policylists	107
POST policylists	107
DELETE policylists	107
DELETE portobjectgroups	108
PUT portobjectgroups	108
POST portobjectgroups	108
GET portobjectgroups	108
GET ports	109

DELETE protocolportobjects	109
PUT protocolportobjects	109
POST protocolportobjects	110
GET protocolportobjects	110
GET radiusservergroups	110
DELETE ranges	110
PUT ranges	111
POST ranges	111
GET ranges	111
GET realms	111
PUT realms	112
POST realms	112
DELETE realms	112
GET realmusergroups	112
GET realmusers	113
GET route maps	113
PUT routemaps	113
POST routemaps	113
DELETE routemaps	113
GET securitygrouptags	114
DELETE securityzones	114
PUT securityzones	114
POST securityzones	114
GET securityzones	114
GET SI DNS Feeds	115
GET SI DNS Lists	115
GET sinetworkfeeds	115
GET SI Network Lists	115
GET Sinkholes	116
GET siurlfeeds	116
GET siurllists	116
DELETE slamonitors	116
PUT slamonitors	116
POST slamonitors	117

GET slamonitors	117
GET SSO Servers	117
GET standard access lists	117
PUT standardaccesslists	118
POST standardaccesslists	118
DELETE standardaccesslists	118
GET standard community lists	118
PUT standardcommunitylists	118
POST standardcommunitylists	119
DELETE standardcommunitylists	119
GET time ranges	119
PUT time ranges	119
POST time ranges	119
DELETE time ranges	119
GET time zone objects	120
PUT time zone objects	120
POST time zone objects	120
DELETE time zone objects	120
DELETE tunneltags	120
PUT tunneltags	121
POST tunneltags	121
GET tunneltags	121
GET urlcategories	121
DELETE urlgroups	121
PUT urlgroups	122
POST urlgroups	122
GET urlgroups	122
DELETE urls	122
PUT urls	123
POST urls	123
GET urls	123
GET Usage	124
GET variablesets	124
DELETE vlangrouptags	124



PUT vlangrouptags	124
POST vlangrouptags	125
GET vlangrouptags	125
DELETE vlangrouptags	125
PUT vlangroups	126
POST vlangroups	126
GET vlangroups	126
Policy Services	127
DELETE accesspolicies	127
PUT accesspolicies	127
POST accesspolicies	127
GET accesspolicies	127
DELETE accessrules	127
PUT accessrules	128
POST accessrules	128
GET accessrules	128
DELETE categories	128
PUT categories	128
POST categories	129
GET categories	129
PUT defaultactions	129
GET defaultactions	129
GET loggingsettings	130
PUT loggingsettings	130
GET securityintelligencepolicies	130
GET dnspolicies	130
GET allowdnrules	131
GET blockdnrules	131
GET dynamicaccesspolicies	131
PUT dynamicaccesspolicies	131
POST dynamicaccesspolicies	131
DELETE dynamicaccesspolicies	132
GET filepolicies	132
DELETE ftdnatpolicies	132

PUT ftdnatpolicies	132
POST ftdnatpolicies	132
GET ftdnatpolicies	133
DELETE ftds2svpns	133
PUT ftds2svpns	133
POST ftds2svpns	133
GET ftds2svpns	133
PUT advancedsettings	134
GET advancedsettings	134
DELETE endpoints	134
PUT endpoints	134
POST endpoints	134
GET endpoints	135
PUT ikesettings	135
GET ikesettings	135
PUT ipsecsettings	135
GET ipsecsettings	136
DELETE autonatrules	136
PUT autonatrules	136
POST autonatrules	136
GET autonatrules	136
PUT autonatrules	137
DELETE manualnatrules	137
PUT manualnatrules	137
POST manualnatrules	137
GET manualnatrules	137
GET natrules	138
PUT inheritancesettings	138
GET inheritancesettings	138
GET identitypolicies	138
GET intrusionpolicies	139
PUT intrusionpolicies	139
POST intrusionpolicies	139
DELETE intrusionpolicies	139

GET intrusionrulegroups	139
PUT intrusionrulegroups	140
POST intrusionrulegroups	140
GET intrusionrules	140
PUT intrusionrules	140
GET networkanalysispolicies	141
PUT networkanalysispolicies	141
POST networkanalysispolicies	141
DELETE networkanalysispolicies	141
GET Inspector Configurations	141
GET inspectoroverrideconfigs	142
PUT inspectoroverrideconfigs	142
DELETE prefilterpolicies	142
PUT prefilterpolicies	142
POST prefilterpolicies	142
GET prefilterpolicies	142
GET remoteaccessvpns	143
GET addressassignmentsettings	143
GET certificatemapsettings	143
GET connectionprofiles	143
DELETE hitcounts	144
PUT hitcounts	144
GET hitcounts	144
DELETE prefilterrules	145
PUT prefilterrules	145
POST prefilterrules	145
GET prefilterrules	145
GET snmpalerts	146
GET syslogalerts	146
Policy Assignment Services	146
PUT policyassignments	146
POST policyassignments	146
GET policyassignments	147
Status Services	147

GET taskstatuses	147
System Information	147
GET domain	147
GET serverversion	147
Update Packages	148
POST Cancel Upgrades	148
POST Retry Ugrades	148
DELETE upgradepackages	148
GET upgradepackages	148
GET listapplicabledevices	148
POST upgradepackage	149
POST revertupgrades	149
GET upgradepackages: Monitor	149



# CHAPTER 1

## About the Management Center REST API

---

The management center REST API provides a lightweight API to manage a management center.

- [About the Management Center REST API, on page 1](#)
- [Whats New in 7.1, on page 1](#)
- [Enabling the REST API, on page 4](#)
- [Best Practices, on page 5](#)
- [Additional Resources, on page 5](#)

## About the Management Center REST API

With the release of management center REST API, you now have light-weight, easy-to-use option for managing threat defense and legacy devices through a management center.

The REST API is an application programming interface (API), based on “RESTful” principles, which you can quickly enable on any management center running version 6.1 or higher, and use with a REST client.

After installing a REST client, you can contact the specific management center's REST agent and use standard HTTP methods to access current configuration information, and issue additional configuration parameters.

## Whats New in 7.1

The following new features and functionality were added in version 7.1.

- Added error  
`401 Invalid Session`
- Added error  
`429 Too Many Writes`
- Removed biased terminology from field names and descriptions
- Added the following new sections in API Explorer:
  - Troubleshoot
  - Network Map
  - Chassis

## New API endpoints and Methods

**Table 1: New Endpoints: these are new endpoints and methods.**

Name	Methods	URL
<b>Troubleshoot</b>		
Packet Tracer Files	DELETE, DELETE by ID	/api/fmc_troubleshoot/v1/obrain/{obrainUID}/packettracer/files/
<b>Network Map</b>		
Netmap Hosts	GET, GET by ID, POST, DELETE	/api/fmc_netmap/v1/obrain/{obrainUID}/hosts/{objectId}
Vulns	GET, GET by ID, POST, DELETE	/api/fmc_netmap/v1/obrain/{obrainUID}/vulns/
<b>Users</b>		
Duo Configs	GET, GET by ID, PUT	/api/fmc_config/v1/obrain/{obrainUID}/users/duoconfigs/
<b>Deployment Services</b>		
Job Histories	GET, GET by ID, PUT	/api/fmc_config/v1/obrain/{obrainUID}/deployer/jobhistories
Download Reports	GET	/api/fmc/v1/obrain/{obrainUID}/reports/jobhistories/{objectId}/getreport
Email Reports	POST	/api/fmc/v1/obrain/{obrainUID}/reports/jobhistories/{objectId}/getreport/email
<b>Device Clusters</b>		
Threat Defense Cluster Readiness Check	POST	/api/fmc_config/v1/obrain/{obrainUID}/threatdefense/clusterreadinesscheck
Threat Defense Cluster Device Commands	POST	/api/fmc/v1/obrain/{obrainUID}/threatdefense/clusterdevices/{objectId}/getreport/clusterdevicecommands
<b>Health Services</b>		
Tunnel Statuses	GET	/api/fmc_config/v1/obrain/{obrainUID}/health/tunnelstatuses
Tunnel Summaries	GET	/api/fmc_config/v1/obrain/{obrainUID}/health/tunnelsummaries
<b>Chassis</b>		
Management Center Managed Chassis	GET, GET by ID	/api/fmc_config/v1/obrain/{obrainUID}/chassis/managedchassis
Network Modules	GET, GET by ID, PUT	/api/fmc_config/v1/obrain/{obrainUID}/chassis/managedchassis/{objectId}/networkmodules
Sync Network Module	PUT	/api/fmc/v1/obrain/{obrainUID}/chassis/managedchassis/{objectId}/getreport/syncnetworkmodule
Chassis Interfaces	GET, GET by ID	/api/fmc/v1/obrain/{obrainUID}/chassis/managedchassis/{objectId}/chassisinterfaces
<b>Device Services</b>		

Name	Methods	URL
ECMP Zones	GET, GET by ID, PUT, POST, DELETE	/api/config/v1/chain/{chainID}/zones/{zoneID}/ecmpzones
Virtual ECMP Zones	GET, GET by ID, PUT, POST, DELETE	/api/config/v1/chain/{chainID}/zones/{zoneID}/virtualzones/{virtualZoneID}/ecmpzones
Packet Tracer	POST	/api/config/v1/chain/{chainID}/zones/{zoneID}/packettracers
Packet Tracer PCAP	POST	/api/config/v1/chain/{chainID}/zones/{zoneID}/packettracers/pcap
Policy Based Routes	GET, GET by ID, PUT, POST, DELETE	/api/config/v1/chain/{chainID}/zones/{zoneID}/policybasedroutes
Virtual Policy Based Routes	GET, GET by ID, PUT, POST, DELETE	/api/config/v1/chain/{chainID}/zones/{zoneID}/virtualpolicybasedroutes
VTEP Policies	GET, GET by ID, PUT, POST, DELETE	/api/config/v1/chain/{chainID}/zones/{zoneID}/vteppolicies
VNI Interfaces	GET, GET by ID, PUT, POST, DELETE	/api/config/v1/chain/{chainID}/zones/{zoneID}/vnifaces
Threat Defense All Interfaces	GET	/api/config/v1/chain/{chainID}/zones/{zoneID}/threatdefense/allinterfaces
<b>Integration</b>		
Dynamic Attributes Feeds	GET, PUT	/api/config/v1/chain/{chainID}/integration/dynamicattributesfeeds
<b>Object</b>		
Anyconnect External Browser Packages	GET, GET by ID	/api/config/v1/chain/{chainID}/object/anyconnectexternalbrowserpackages
Bulk Dynamic Objects	POST	/api/config/v1/chain/{chainID}/object/bulldynamicobjects
Extended Community Lists	GET, GET by ID, GET overrides, GET overrides by ID, OUT, POST, DELETE	/api/config/v1/chain/{chainID}/object/extendedcommunitylists
Packet Tracer PCAP List	GET	/api/config/v1/chain/{chainID}/object/packettracerspcaplist
Packet Tracer PCAP Upload	POST	/api/config/v1/chain/{chainID}/object/packettracerspcapupload
<b>Updates</b>		
Revert Upgrades	POST	/api/platform/v1/updates/revertupgrades

New Methods for existing endpoints

**Table 2: New Methods for Existing Endpoints: these provide additional functionality for existing endpoints**

Name	Methods	URL
<b>Device Clusters</b>		
Threat Defense Device Cluster (existing)	PUT, POST, DELETE	/api/fire_config/v1/device/{deviceUID}/threat-defense/device-cluster/{object}
<b>Device Services</b>		
BGP	PUT, POST, DELETE	/api/fire_config/v1/device/{deviceUID}/services/services/{deviceUID}/routing/bgp
BGP General Settings	PUT, POST, DELETE	/api/fire_config/v1/device/{deviceUID}/services/services/{deviceUID}/routing/bgp/general-settings
<b>Object</b>		
AS Path Lists (existing)	PUT, POST, DELETE	/api/fire_config/v1/device/{deviceUID}/object/aspathlists
Expanded Community Lists	PUT, POST, DELETE	/api/fire_config/v1/device/{deviceUID}/object/expandedcommunitylists
Extended Access Lists	PUT, POST, DELETE	/api/fire_config/v1/device/{deviceUID}/object/extendedaccesslists
IPv4 Prefix Lists (existing)	PUT, POST, DELETE	/api/fire_config/v1/device/{deviceUID}/object/ipv4prefixlists
IPv6 Prefix Lists	PUT, POST, DELETE	/api/fire_config/v1/device/{deviceUID}/object/ipv6prefixlists
Policy Lists	PUT, POST, DELETE	/api/fire_config/v1/device/{deviceUID}/object/policylists
Route Maps	PUT, POST, DELETE	/api/fire_config/v1/device/{deviceUID}/object/routemaps
Standard Access Lists	PUT, POST, DELETE	/api/fire_config/v1/device/{deviceUID}/object/standardaccesslists
Standard Community Lists	PUT, POST, DELETE	/api/fire_config/v1/device/{deviceUID}/object/standardcommunitylists

## Enabling the REST API

In management center, the REST API is enabled by default. However, if you are intending to use the REST API, you should confirm that it is enabled.



**Note** If you are using UCAPL mode, check that the REST API is not enabled.

- Step 1** Navigate to System>Configuration>REST API Preferences>Enable REST API
- Step 2** Check the "Enable REST API" checkbox.
- Step 3** Click "Save". A "Save Successful" dialog will display when the REST API is enabled.



## Best Practices

Cisco recommends the following best practices for optimal results with the REST API:

- Keep UI users and script users separate. Especially do not use the admin account as an API user.
- Do not give script users more privilege than needed.
- Always validate the content coming from the server.
- Validate/sanitize JSON content, as it may include embedded executable code.
- If you are using CC or UCAPL mode you should disable REST API access to the management center and managed devices.

## Additional Resources

Additional resources for the management center REST API can be found on Cisco DevNet at <https://developer.cisco.com/firepower/>.





## CHAPTER 2

# About the API Explorer

---

- [About the API Explorer, on page 7](#)
- [Authentication to the API Explorer, on page 7](#)
- [Accessing the Legacy API Explorer, on page 8](#)
- [Obtaining Sample Code with CodeGen, on page 9](#)
- [Viewing API Parameters, on page 10](#)

## About the API Explorer

The API Explorer provides a limited interface for the REST API as well as giving a view of the abilities of the REST API.

The API Explorer resides on the management center, and can be accessed via the management center at:

```
https://<management_center_IP_or_name>:<https_port>/api/api-explorer
```

Version 6.4 uses a new API Explorer, based on the OpenAPI Specification (OAS). You can still access the legacy API Explorer if you prefer.

As part of the OAS, you now use CodeGen to generate sample code.

This explorer provides the list of APIs available on the management center, and their details.

## Authentication to the API Explorer

The REST API relies on the same authentication as the management center. Each function in the REST API maps to permissions in the management center.

You can log into the API Explorer using any account on the management center, but you will only be able to perform the functions for which the account has permissions. For more information on setting permissions for user roles, see the *Firepower Management Center Configuration Guide*.

The first time you connect to the API Explorer you may receive an error that the connection is not secure due to an invalid certificate. You will need to add an exception in your browser to use the certificate and accept the connection.

## Logging into API Explorer

The REST API uses the same authentication and permission model as the management center. See the *Firepower Management Center Configuration Guide* for more information.

### Before you begin

Make sure you have an account on your management center with the required permissions to perform the tasks you want to perform using the REST API.

---

**Step 1** Navigate to the following URL: `https://<management_center_IP_or_name>:<https_port>/api/api-explorer`

If you experience an extended load time for the logon screen when using a Firefox browser, enter **about:support** in the search bar and click the **Refresh Firefox** option, then view the management center interface with self-signed certificates in the same Firefox browser. For more information, see <https://support.mozilla.org/en-US/kb/refresh-firefox-reset-add-ons-and-settings>.

**Step 2** Log in with your username and password and click "Sign In"

---

### What to do next

Locate the desired resource and request.

## Setting the Domain

The REST API can perform functions globally, in the default domain, or in specific domains.

### Before you begin

You must have a configured management center, an account with permissions to access the REST API in one or more domains configured on your management center.

---

In the upper right, drop down the `Domains` menu and select the desired domain.

---

### What to do next

Locate the desired resource and request type.

## Accessing the Legacy API Explorer

The API Explorer has changed for 6.4.0. While the newer API Explorer retains nearly all of the previous functionality, some users may prefer the older interface.

### Before you begin



**Note** The Legacy Explorer will be removed in future releases of management center. Please use the Open API Specification for access to current REST API functionality in the future.

Make sure you have an account on your management center with the required permissions to perform the tasks you want to perform using the REST API.

Log in to the API Explorer at [https://<management\\_center\\_IP\\_or\\_name>:<https\\_port>/api/api-explorer](https://<management_center_IP_or_name>:<https_port>/api/api-explorer).

---

In the upper right-hand corner click on `Legacy Explorer`.

---

### What to do next

Use the Legacy API Explorer as you would normally.

## Obtaining Sample Code with CodeGen

You can use the CodeGen utility on the Open API Spec to generate sample code in a number of different languages. This utility is an open-source tool you can download online. The resultant code is meant primarily as an educational and bootstrapping tool.

The CodeGen utility creates sample code for the entire Open API Spec. As such, it generates sample code for every allowed method and endpoint in the REST API. The sample code can be in a variety of languages, including HTML, Perl, Python, and Java.

For complete documentation of the CodeGen utility go to <https://repo1.maven.org/maven2/io/swagger/swagger-codegen-cli/>

## Downloading the Open API Spec

The Open API Spec is a standardized specification of a REST API. The Open API Spec for the management center REST API contains details about the endpoints, fields, parameters, and requirements of the API. You can use the API Spec to generate sample code as well as find specific information about API functionality.

The Open API Spec is a JSON file. It can be read by most text editors.

### Before you begin

Have an account on the management center which is able to access the API Explorer.

Make sure that your browser is able to download from sites with self-signed certificates.

---

**Step 1** Navigate to the following URL: [https://<management\\_center\\_IP\\_or\\_name>:<https\\_port>/api/api-explorer](https://<management_center_IP_or_name>:<https_port>/api/api-explorer)

**Step 2** Click on `Download Spec` in the upper right corner. Depending on your browser configuration, you will either be given a prompt to save the file, or be shown the file directly.

**Step 3** Save the file. Be sure to note the destination and filename.

---

#### What to do next

Run the CodeGen utility on the downloaded file.

## Generating Sample Code with the CodeGen Utility

The Swagger CodeGen utility allows you to generate sample code from an Open API Spec. This sample code can be in a variety of languages including Java, HTML, Python, and Perl.

#### Before you begin

Download the Swagger CodeGen Utility. It can be found at <https://repo1.maven.org/maven2/io/swagger/swagger-codegen-cli/>

Have a Java Runtime Environment installed on your computer

Download the management center REST API Open API Spec

Set environment variables to allow you to run the CodeGen utility

---

From the command line, run the command `java -jar ./swagger-codegen-cli-<VERSION>.jar generate -o <OUTPUT_PATH> -l <LANGUAGE> -i <OPEN_API_SPEC_FILE>`

#### Example:

```
java -jar ./swagger-codegen-cli-2.3.1.jar generate -o C:\work\code\api_schema\html -l html -i
fmc_swagger.json
```

<VERSION> is the specific version of the CodeGen utility you are using. It must match the filename of the CodeGen .jar file.

<OUTPUT\_PATH> is the path to which you want to output the generated code.

<LANGUAGE> is the language which you want CodeGen to generate. Suggested options include `html`, `java`, `perl`, and `python`. Other options are possible, check the CodeGen documentation for the complete list of choices.

<OPEN\_API\_SPEC\_FILE> is the Open API Spec file which you downloaded. This is the source from which CodeGen is generating example code. Without it, CodeGen cannot provide output.

---

#### What to do next

Find the generated code in the output path and use as desired. Generated code should be considered an example, and may not perform as desired unless modified to meet your needs.

## Viewing API Parameters

Each resource has a set of parameters and fields associated with it. You can view the parameters and fields by performing any of the supported operations for that resource within API Explorer.

**Before you begin**

You must have a configured management center and an account on that center with the permissions required to use the desired REST API functions.

---

**Step 1** Select the desired resource.

**Step 2** Select one of the supported operations for that resource.

---







## CHAPTER 3

# Connecting with a Client

You can access the REST API using any REST API client. Typically REST API clients are available as browser plugins, but any REST API client is allowed.



**Note** If connecting to the REST API for the first time, you will receive a certificate warning. You need to accept the certificate in order to use the REST API.

- [Authentication from a REST API Client, on page 13](#)

## Authentication from a REST API Client


**Cisco recommends that you use different accounts for interfacing with the API and the User Interface.** Credentials cannot be used for both interfaces simultaneously, and will be logged out without warning if used for both.

The first time you connect to the REST API you may receive an error that the connection is not secure due to an invalid certificate. Add an exception in your browser to use the certificate and accept the connection.

With Token Based Authentication you obtain a token by providing your username and password. You use this token to access an HTTP service for a limited time period without the need for the username and password with every request. In other words, to eliminate the need for authenticating with your username and password with each request, you replace user credentials with a uniquely generated access token, which you use for accessing resources for up to 30 minutes and can refresh up to three times.

The diagram below illustrates the concept of token-based authentication:

**Token-Based Authentication**

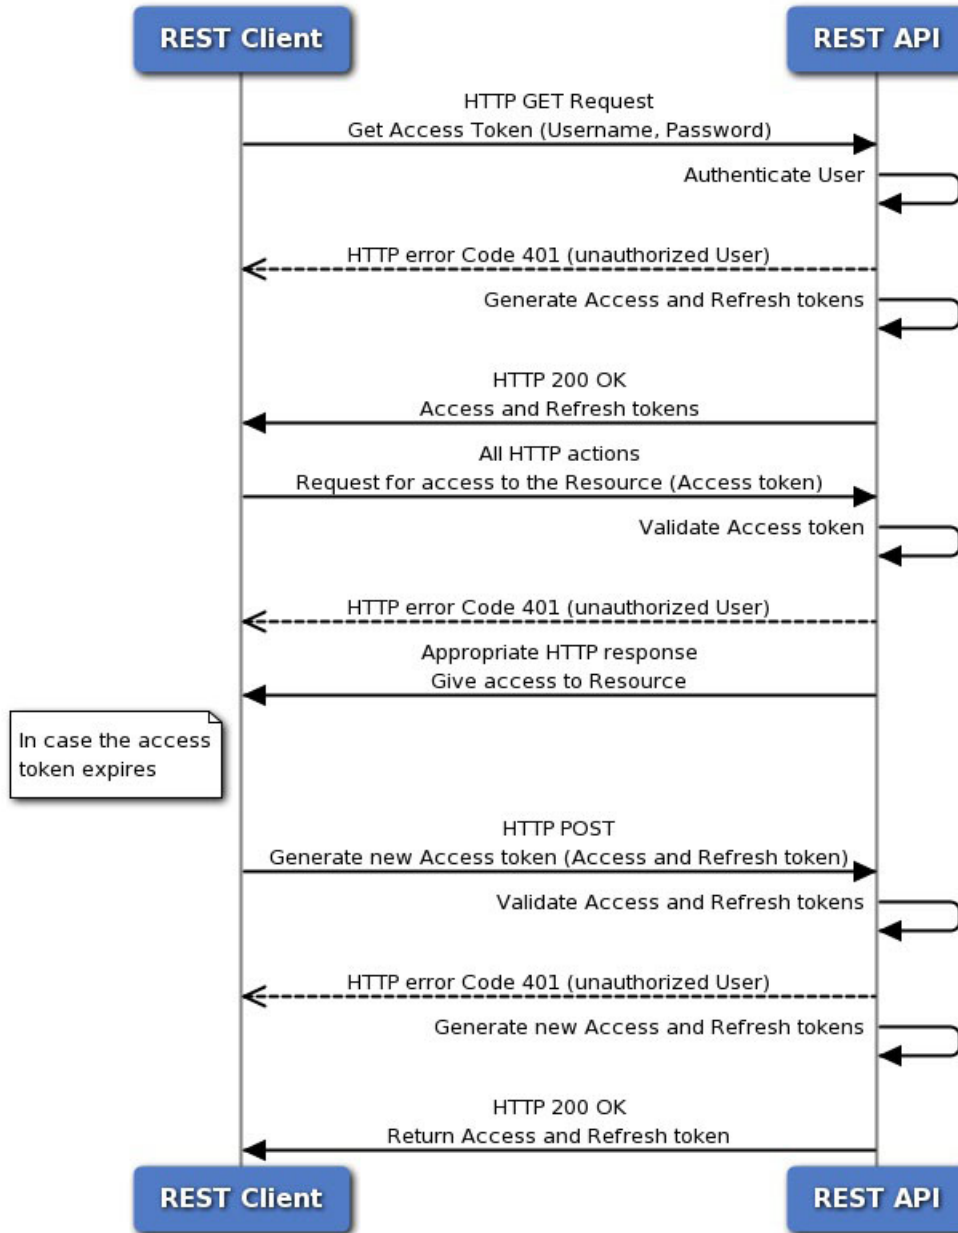

## Requesting an Authentication Token

The Token Generation Utility provides an authentication token which can be used in your REST API client.

### Before you begin

You must have a configured management center and an account on that center with credentials to use the REST API. You must also have a REST API Client which can perform basic authentication.

- 
- Step 1** Open your REST API Client.
- Step 2** Set the client to make a POST command to the following URL:  
`https://<management_center_IP_or_name>/api/fmc_platform/v1/auth/generatetoken.`
- Step 3** Include the username and password as a basic authentication header. The POST body should be blank.
- 

#### What to do next

Add the header `X-auth-access-token:<authentication token value>` in requests to the API.

Add the headers `X-auth-access-token:<authentication token value>` and `X-auth-refresh-token:<refresh token value>` in requests to refresh the token as described in [Authentication from a REST API Client, on page 13](#)

Use the `Domain_UUID` from the authentication token in all REST requests to the server.

## Refreshing an Authentication Token

management center REST API authentication tokens are valid for 30 minutes, and can be refreshed up to three times.

#### Before you begin

Obtain valid authentication and refresh tokens from the management center REST API. Ensure these tokens have been refreshed less than three times.

- 
- Step 1** Open your REST API Client.
- Step 2** Set the client to make a POST command to the following URL:  
`https://<management_center_IP_or_name>/api/fmc_platform/v1/auth/refreshtoken` with the headers `X-auth-access-token:<authentication token value>` and `X-auth-refresh-token:<refresh token value>`.
- 

#### What to do next

Add the header `X-auth-access-token:<new authentication token value>` in requests to the API.

Add the header `X-auth-refresh-token:<new refresh token value>` in requests to refresh the token.





## CHAPTER 4

# Objects in the REST API

---

- [Request Structure](#), on page 17
- [Bulk Rule Posting](#), on page 19
- [Response Structure](#), on page 20
- [Rate Limiting](#), on page 22
- [Payload Limiting](#), on page 22
- [Object Overrides](#), on page 23
- [Field Renaming](#), on page 24
- [Troubleshoot](#), on page 24
- [Network Map](#), on page 24
- [Audit Services](#), on page 26
- [Users](#), on page 26
- [Deployment Services](#), on page 27
- [Device Group Services](#), on page 29
- [Device Clusters](#), on page 30
- [Device HA Pair Services](#), on page 32
- [Health Services](#), on page 35
- [Chassis](#), on page 36
- [Device Services](#), on page 38
- [Intelligence Services](#), on page 67
- [Search](#), on page 71
- [Integration Services](#), on page 72
- [Object Services](#), on page 76
- [Policy Services](#), on page 127
- [Policy Assignment Services](#), on page 146
- [Status Services](#), on page 147
- [System Information](#), on page 147
- [Update Packages](#), on page 148

## Request Structure

Request Structure:

Requests are sent to the management center as HTTPS requests with the Uniform Resource Identifier (URI) of the form described below:

```
https://<management_center_IP_or_name>:<https_port>/<object_URL>/object_UUIDoptions
```

Where:

- <management\_center\_IP\_or\_name>  
is the IP address or Fully Qualified Domain Name of the management center
- <https\_port>  
is the port number used by the management center for HTTPS connections. This port is always 443.
- <object\_URL>  
is the specific URL for the desired resource. These URLs are unique for each resource and are given below.
- *options*  
are the options given with the request. Options can be used to modify the output and filter results.
- *{UUID}*  
Many URLs contain one or more UUIDs which must be specified. Most URIs include the domain UUID, which can be found in the Authentication Token. When deleting or modifying an object, or requesting information about a specific object, the URI will end with the object UUID.

Available request methods are:

- GET  
– Retrieves data from the specified object. GET is a read-only operation.
- PUT  
– Adds the supplied information to the specified object; returns a 404 Resource Not Found error if the object does not exist.




---

**Note** Currently PUT may be used to create a new object, but this ability may be removed in later releases. Use POST to create new objects and PUT to modify existing objects.

---

- POST  
– Creates the object with the supplied information. POST operations should be followed with a payload consisting of the JSON object to be created, enclosed in braces:

```
{object}
```




---

**Note** The maximum number of rules you can use depends on memory of the device. There is no set limit, because complex rules use more memory. For rule performance and optimization guidelines, see the management center Configuration Guide.

---

- DELETE
  - Deletes the specified object.
- PATCH
  - **Not supported.**

The API supports query parameters for almost all requests. For GET requests, the following query parameters can be used to control the number of returned objects and the pagination:

- `expanded`
  - This is a True/False value which indicates whether you get a full listing of an item in a list or only a reference. Some fields will only show if this flag is set to true.
- `offset`
  - Indicates the position in the list where you want to start.
- `limit`
  - Indicates the number of items you want to retrieve in a page.

The API supports filtering on the basis of query parameters passed with a request. Filtering can be done based on specific attributes in a model. The parameters available for filtering vary by object, and are listed with the request below.

## Bulk Rule Posting

Multiple access control rules can be added with a POST command using the bulk insert feature. This feature allows as many as 1,000 rules to be added at once.

This feature is only available for access rules.

The URL for this feature is:

```
https://{fmc_ip_or_name}:{https_port}/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{policy_UUID}/accessrules?bulk=true
```

The option:

```
?bulk=true
```

indicates that that multiple rules will be used in the payload of this request.

All objects in the payload of the bulk POST request must be of the same type. You cannot mix different objects in the same bulk request.

Unlike a normal POST operation, the bulk POST requires a list of JSON objects. This list may have as many as 1,000 objects or as few as one. The individual JSON objects must be enclosed in braces. Each object must be separated by commas, and the entire list is enclosed in brackets:

```
[{object}]
[{object1},{object2},{object3},{object4},{object5} ...]
```

The following query parameters are supported in bulk POST requests:

- `bulk=true`
  - This parameter specifies that the bulk POST feature is being used in the query. This parameter is **required** for bulk rule posting.

- `section=mandatory/default`

This parameter specifies the section into which the rules will be added. If this parameter is not used the section will be the default section. Only `mandatory` and `default` are allowed values. If a section is specified it must exist or the request will fail. If a section is specified, a category cannot be specified.

- `category=<Name of the category>`

This parameter specifies the category into which the rules will be added. If a category is specified it must exist or the request will fail. If a category is specified, a section cannot be specified.

- `insertAfter=<Index of rule>`

This parameter specifies that the rules will be inserted after the specified rule index. If no section or category is specified, the rules will be added to the section or category after the insertion point.

- `insertBefore=<Index of rule>`

This parameter specifies that the rules will be inserted before the specified rule index. If no section or category is specified, the rules will be added to the section or category before the insertion point. `insertBefore` takes precedence over `insertAfter` - if both are specified, the `insertBefore` parameter will apply.

When a rule or group of rules are inserted at an index which is part of either a section or a category, the category or section parameter can be used along with index to specify the insertion location of the rule(s). If an index is given along with a section or category, but the index is not in that section or category, you will receive an error.

If no index is specified, rules will be inserted after the end of the access policy. If a category or section is specified but no index is specified, rules will be inserted at the end of the category or section.

In any given POST all of the rules will be inserted at a single point. You cannot specify multiple insertion locations in a POST request.




---

**Note** Rule order affects how orders are parsed by the management center.

---

## Response Structure




---

**Note** The REST API will serve only 25 results per page. This can be increased up to 1000 using the limit query parameter.

---

The response structure can be:

- **LOCATION** – Newly created resource ID; for POST only—holds the new resource ID (as a URI representation).
- **CONTENT-TYPE** – Media type describing the response message body; describes the representation and syntax of the response message body.
- Each response includes an HTTP status or error code. Available codes fall into these categories:



- 20x - A two-hundred series code indicates successful operation, including:
  - 200 200
    - "OK". Standard response for successful requests.
  - 201 201
    - "Created". Request completed; new resource created.
  - 202 202
    - "Accepted". Request accepted, but processing not complete.
  - 204 204
    - "No Content". Server successfully processed request; no content is being returned.
- 4xx - A four-hundred series code indicates a client-side error, including:
  - 400 400
    - "Bad Request". Invalid query parameters, including unrecognized parameters, missing parameters, or invalid values.

This can indicate that the object was edited or deleted via REST API such that the corresponding policy is invalidated.
  - 401 Invalid Session
    - Invalid session.
  - 404 404
    - "Not Found". The provided URL does not match an existing resource. For example, an HTTP DELETE may fail because the resource is unavailable.
  - 405 405
    - "Method Not Allowed". An HTTP request was presented that is not allowed on the resource; for example, a POST on a read-only resource.
  - 422 422
    - "Unprocessable Entity". The payload is too large. This will occur when you send a payload greater than 2048000 bytes.
    - The payload contains an unprocessable or unreadable entity such as a invalid attribut name or incorrect JSON syntax.
  - 429 Too Many Writes
    - Parallel add/update/delete operations are blocked. Please retry the request.
  - 429 429
    - "Too Many Requests". Too many requests were sent to the API. This error will occur if you send more than 120 requests per minute.
    - Too many concurrent requests. The system cannot accept more than 10 parallel requests from all clients.
    - Too many write operations per server. The API will only allow one PUT, POST, or DELETE request per user on a server at a time.

- 5xx - A five-hundred series code indicates a server-side error.

In the case of an error, in addition to the error code, the return response may include an error object containing more details about the error. The JSON error/warning response schema is as follows:

```
{
  "error": {
    "category": "FRAMEWORK",
    "messages": [
      {
        "description": "Action is mandatory to be specified."
      }
    ],
    "severity": "ERROR"
  }
}
```

where the object properties are:

**Table 3: Object Properties**

Property	Type	Description
messages	List of Dictionaries	List of error or warning messages
code	String	Error/Warning/Info code
details	String	Detailed message corresponding to Error/Warning/Info

## Rate Limiting

The management center REST API implements rate limiting to reduce network load.

The API will accept no more than 120 messages per minute from an individual IP address. It will only allow 10 simultaneous connections per IP address. These are not configurable parameters.

If a client exceeds these limits, the API will give an HTTP 429 error.

## Payload Limiting

The API cannot accept a message with a payload greater than 2048000 bytes. This applies to both the REST API and to API Explorer. This is not a configurable parameter.

If a message exceeds this limit, the API will give an HTTP 422 error.

## Object Overrides

An override defines an alternate value for an object, which the system uses for the device or domain specified. In a single request user can create multiple overrides for multiple objects using bulk operation.

When an object is overridden, the alternate values will be provided for that object when it is requested. This does not overwrite the original values, which will return if the override is removed. The override gives alternate values for all fields in the object except for the `Name` and `Description` fields.

The URL for this feature is:

```
https://{fmc_ip_or_name}:{https_port}/api/fmc_config/v1/domain/{Domain_uuid} /object/hosts
```

Request payload to create an override for object “testhost” on domain “Global \ RETAIL” with the override value being “1.2.3.5”:

```
{
  "type": "Host",
  "value": "1.2.3.5",
  "overrides": {
    "parent": {
      "id": "<Parent UUID>",
      "type": "Host"
    },
    "target": {
      "name": "Global \ RETAIL",
      "id": "<target domain UUID>",
      "type": "Domain"
    }
  },
  "overridable": true,
  "description": " ",
  "name": "testhost",
}
```

Optional:

```
?bulk=true
```

indicates the override creation for more than one object.

GET:

URL to list all overrides on a particular object:

```
/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{host_UUID}/overrides
```

URL for override for an object on a particular domain or device:

```
/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{host_UUID}?overrideTargetId={target_UUID}
```

URL for all the overrides on a particular domain or device:

```
/api/fmc_config/v1/domain/{domain_UUID}/object/hosts?overrideTargetId={target_UUID}
```




---

**Note** When overridden, the parent object value will never change.

---

## Field Renaming

The following fields have been renamed to remove biased terminology in the documentation. Note that the old fields are entirely replaced as of version 7.1 and no longer exist.

*Table 4:*

Name	URL	Previous Field Name	New Field Name
ftddevicecluster	<del>/api/fmc/v1/domains/{domainUUID}/devices/ftddes</del>	masterDevice	controlDevice
		master_device_UUID	control_device_UUID
		slaveDevices	dataDevices
		slave1_device_UUID	data1_device_UUID
		slave2_device_UUID	data2_device_UUID
		slave3_device_UUID	data3_device_UUID
Observable	<del>/api/fmc/v1/domains/{domainUUID}/observables</del>	whitelist	allowlist
Indicator	<del>/api/fmc/v1/domains/{domainUUID}/indicators</del>	whitelist	allowlist
Incident	<del>/api/fmc/v1/domains/{domainUUID}/incidents</del>	whitelist	allowlist
Source	<del>/api/fmc/v1/domains/{domainUUID}/sources</del>	whitelist	allowlist

## Troubleshoot

### DELETE packettracerfiles

Request Type: **DELETE**

Description: Deletes PCAP files from management center. If no ID is specified, deletes all packet tracer files from the management center.

URL: `/api/fmc_troubleshoot/v1/domain/{domainUUID}/packettracer/files/`

URL for Delete by ID:

`/api/fmc_troubleshoot/v1/domain/{domainUUID}/packettracer/files/{pcapFileName}`

Permissions: Devices > Troubleshoot > Packet Tracer > Modify Packet Tracer

## Network Map

### GET netmaphosts

Request Type: **GET**

Description: Retrieves a host associated with the ID in the Network Map. If no ID is specified, retrieves list of all hosts in the Network Map.

URL: `/api/fmc_netmap/v1/domain/{domainUUID}/hosts/{objectId}`

URL for GET by ID: `/api/fmc_netmap/v1/domain/{domainUUID}/hosts/{objectId}/{object_UUID}`

Permissions: Object Manager

Parameters available for filtering: ipAddress

## DELETE netmaphosts

Request Type: **DELETE**

Description: Deletes the specified host in the Network Map. If no ID is specified, deletes the entire Network Map.

URL: `/api/fmc_netmap/v1/domain/{domainUUID}/hosts/`

URL to delete a specific host: `/api/fmc_netmap/v1/domain/{domainUUID}/hosts/{objectId}`

Permissions: Object Manager > Modify Object Manager

## POST netmaphosts

Request Type: **POST**

Description: Creates a host in the Network Map.

URL: `/api/fmc_netmap/v1/domain/{domainUUID}/hosts`

Permissions: Object Manager > Modify Object Manager

## GET vulns

Request Type: **GET**

Description: Retrieves the vulnerability in the Network Map with the specified ID. If no ID is specified, retrieves list of all vulnerabilities in the Network Map.

URL: `/api/fmc_netmap/v1/domain/{domainUUID}/vulns/`

URL for GET by ID: `/api/fmc_netmap/v1/domain/{domainUUID}/vulns/{objectId}/`

Permissions: Policies > Network Discovery

Parameters available for filtering: ipAddress, source, port, protocol, id

## DELETE vulns

Request Type: **DELETE**

Description: Deletes the the vulnerability in the Network Map with the specified ID. If no ID is specified, deletes all vulnerabilities in the Network Map.

URL: `/api/fmc_netmap/v1/domain/{domainUUID}/vulns`

URL for DELETE by ID: `/api/fmc_netmap/v1/domain/{domainUUID}/vulns/{objectId}`

Permissions: Policies > Network Discovery > Modify Network Discovery

Parameters available for filtering: ipAddress, source, port, protocol, id

source must be included for DELETE

## POST vulns

Request Type: **POST**

Description: Creates a vulnerability in the Network Map.

URL: `/api/fmc_netmap/v1/domain/{domainUUID}/vulns`

Permissions: Policies > Network Discovery > Modify Network Discovery

## Audit Services

### GET auditrecords

Request Type: **GET**

Description: Retrieves audit records.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/audit/auditrecords`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/audit/auditrecords/{objectId}`

Permissions: System > Monitoring > Audit

Parameters available for filtering: username, subsystem, source, starttime, endtime

## Users

### GET authroles

Request Type: **GET**

Description: Retrieves the list of all existing user roles in the system.

URL: `/api/fmc_config/v1/domain/{domainUUID}/users/authroles`

Permissions: System > User Management

Parameters available for filtering: none

### GET SSO Config

Request Type: **GET**

Description: Retrieves the Single Signon Configuration for the device.

URL: `/api/fmc_config/v1/domain/{domainUUID}/users/ssoconfigs/{objectId}`

Permissions: System > User Management > Single Sign-On

Parameters available for filtering: none

## PUT SSO Config

Request Type: **PUT**

Description: Modifies the Single Signon configuration for the device.

URL: `/api/fmc_config/v1/domain/{domainUUID}/users/ssoconfigs/{objectId}`

Permissions: System > User Management > Single Sign-On

## GET duoconfigs

Request Type: **GET**

Description: Retrieves the Duo configuration associated with the specified ID. If no ID is specified, retrieves list of all Duo configurations.

URL: `/api/fmc_config/v1/domain/{domainUUID}/users/duoconfigs/`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/users/duoconfigs/{objectId}`

Permissions: System > User Management > Users

## PUT duoconfigs

Request Type: **PUT**

Description: Modifies the Duo configuration associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/users/duoconfigs/{objectId}`

Permissions: System > User Management > Users

# Deployment Services

## GET deployabledevices

Request Type: **GET**

Description: Retrieves list of all devices with configuration changes, ready to be deployed.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/deployment/deployabledevices`

Permissions: Deploy Configuration to Devices

Parameters available for filtering: name

## GET deployments

Request Type: **GET**

Description: Retrieves deployment details for device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/deployment/deployabledevices/{containerUUID}/deployments`

Permissions: Deploy Configuration to Devices

Parameters available for filtering: startTime, endTime

## GET pendingchanges

Request Type: **POST**

Description: Retrieves all the policy and object changes for the selected device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/deployment/deployabledevices/{containerUUID}/pendingchanges`

Permissions: Deploy Configuration to Devices

## POST deploymentrequests

Request Type: **POST**

Description: Creates a request for deploying configuration changes to the specified device.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/deployment/deploymentrequests/{object_UUID}`

Permissions: Deploy Configuration to Devices

## GET jobhistories

Request Type: **GET**

Description: Retrieves the specified deployment job. If no ID is provided, retrieves all the deployment jobs.

URL: `/api/fmc_config/v1/domain/{domainUUID}/deployment/jobhistories`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/deployment/jobhistories/{objectId}`

Permissions: Deploy Configuration to Devices

Parameters available for filtering: Various filter criteria can be specified using the format

`deviceUUID:{uuid};startTime:start_time_in_secs;endTime:end_time_in_secs;rollbackApplicable:true_or_false`

## PUT jobhistories

Request Type: **PUT**

Description: Modifies the the deployment job with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/deployment/jobhistories/{objectId}`

Permissions: Deploy Configuration to Devices



## GET downloadreports

Request Type: **GET**

Description: Retrieves the report for download.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/deployment/jobhistories/{containerUUID}/operational/downloadreports`

Permissions: Overview > Reporting

## POST emailreports

Request Type: **POST**

Description: Emails the deployment report.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/deployment/jobhistories/{containerUUID}/operational/emailreports`

Permissions: Overview > Reporting

## POST rollbackrequests

Request Type: **POST**

Description: Creates a request for rollback configuration to devices.

URL: `/api/fmc_config/v1/domain/{domainUUID}/deployment/rollbackrequest`

Permissions: Deploy Configuration to Devices

## Device Group Services

### DELETE devicegrouprecords

Request Type: **DELETE**

Description: Deletes a device group with the specified object ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devicegroups/devicegrouprecords/{object_UUID}`

Permissions: Devices > Device Management > Modify Devices

### PUT devicegrouprecords

Request Type: **PUT**

Description: Modifies a device group with the specified object ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devicegroups/devicegrouprecords/{object_UUID}`

Permissions: Devices > Device Management > Modify Devices

## POST devicegrouprecords

Request Type: **POST**

Description: Creates a device group with the specified object ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devicegroups/devicegrouprecords`

Permissions: Devices > Device Management > Modify Devices

## GET devicegrouprecords

Request Type: **GET**

Description: Retrieves the device group associated with the specified ID. If no ID is specified, retrieves list of all device groups.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devicegroups/devicegrouprecords`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devicegroups/devicegrouprecords/{object_UUID}`

Permissions: Devices > Device Management > View Devices

## Device Clusters

### GET ftddevicecluster

Request Type: **GET**

Description: Retrieves or modifies the threat defense Cluster record associated with the specified ID. If no ID is specified for a GET, retrieves list of all threat defense Clusters.

The following fields have been replaced as of 7.1.0:

Previous Field Name	New Field Name
masterDevice	controlDevice
master_device_UUID	control_device_UUID
slaveDevices	dataDevices
slave1_device_UUID	data1_device_UUID
slave2_device_UUID	data2_device_UUID
slave3_device_UUID	data3_device_UUID

URL: `/api/fmc_config/v1/domain/{domainUUID}/deviceclusters/ftddevicecluster/`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/deviceclusters/ftddevicecluster/{objectId}`

Permissions: Devices > Device Management > View Devices

## PUT ftddevicecluster

Request Type: **PUT**

Description: Modifies the threat defense Cluster record associated with the specified ID.

The following fields have been replaced as of 7.1.0:

Previous Field Name	New Field Name
masterDevice	controlDevice
master_device_UUID	control_device_UUID
slaveDevices	dataDevices
slave1_device_UUID	data1_device_UUID
slave2_device_UUID	data2_device_UUID
slave3_device_UUID	data3_device_UUID

URL: /api/fmc\_config/v1/domain/{domainUUID}/deviceclusters/ftddevicecluster/{objectId}

Permissions: Devices > Device Management > Modify Devices

## POST ftddevicecluster

Request Type: **POST**

Description: Creates an threat defense Cluster record.

The following fields have been replaced as of 7.1.0:

Previous Field Name	New Field Name
masterDevice	controlDevice
master_device_UUID	control_device_UUID
slaveDevices	dataDevices
slave1_device_UUID	data1_device_UUID
slave2_device_UUID	data2_device_UUID
slave3_device_UUID	data3_device_UUID

URL: /api/fmc\_config/v1/domain/{domainUUID}/deviceclusters/ftddevicecluster/

Permissions: Devices > Device Management > Modify Devices

## DELETE ftddevicecluster

Request Type: **DELETE**

Description: Deletes the threat defense Cluster record associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/deviceclusters/ftddevicecluster/{objectId}

Permissions: Devices > Device Management > Modify Devices

## POST ftdclusterreadinesscheck

Request Type: **POST**

Description: Represents Cluster compatibility status for control(Readiness to become control) and data devices(compatible with control). This Readiness check is for platforms that support cluster bootstrap from management center (for e.g.4200).

URL: /api/fmc\_config/v1/domain/{domainUUID}/deviceclusters/ftdclusterreadinesscheck

Permissions: Devices > Device Management > Modify Devices

Parameters available for filtering: `skipControlReadiness`: This is a query parameter, if given as true (skipControlReadiness=true) skips control readiness check and performs data devices compatibility with control.

## POST ftdclusterdevicecommands

Request Type: **POST**

Description: Executes given command on the threat defense Cluster.

URL:

/api/fmc\_config/v1/domain/{domainUUID}/deviceclusters/{containerUUID}/operational/ftdclusterdevicecommands

Filters available for use: Filter are `operation` and `deviceUUID`. Value of filter is of format:

```
deviceUUID:device
      uuid;operation:{enable|disable|control}
```

. `deviceUUID` is UUID of device and is a mandatory field. `operation` is the command that needs to be executed on device and is a mandatory field.

Permissions: Devices > Device Management > Modify Devices

## Device HA Pair Services

### DELETE ftddevicehapair

Request Type: **DELETE**

Description: Deletes a device high availability pair with the specified object ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/devicehapairs/ftddevicehapairs/{object\_UUID}

Permissions: Devices > Device Management > Modify Devices




---

**Note** Run the *configure high-availability disable* command to remove the failover configurations from threat defense devices.

---

## PUT ftddevicehapair

Request Type: **PUT**

Description: Sets any one of the following actions for the threat defense high availability device:

- Sets the failover trigger criteria for the device
- Switches states within the device
- Breaks or force-breaks the device

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{ha_container_UUID}`

Permissions: Devices > Device Management > Modify Devices

## POST ftddevicehapairs

Request Type: **POST**

Description: Creates a high availability device pair with the specified primary and secondary object IDs. Do not perform the POST operation for more than one high availability pair at a time. Ensure that the current POST operation is completed successfully before proceeding to the next POST operation.



**Note** Typically, the first POST operation responds within 60 seconds. Cisco recommends that you perform subsequent POST operations at least 120 seconds after the first POST operation was initiated. The response of the POST operation includes a task object, with a task ID and task status. You can monitor the completion of the task by performing a GET operation on the task object with its task ID. For more information, see [GET taskstatuses, on page 147](#).

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs`

Permissions: Devices > Device Management > Modify Devices

## GET ftddevicehapairs

Request Type: **GET**

Description: Retrieves the details associated with the specified high availability container ID. If no ID is specified, retrieves a list of all high availability container objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{ha_container_UUID}`

Permissions: Devices > Device Management > Modify Devices

## DELETE failoverinterfacemacaddressconfigs

Request Type: **DELETE**

Description: Deletes the threat defense high availability failover policy interface MAC addresses record associated with the specified threat defense high availability pair.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/
{hacontainer_UUID}/failoverinterfacemacaddressconfigs
```

Permissions: Devices > Device Management > Modify Devices

## GET failoverinterfacemacaddressconfigs

Request Type: **GET**

Description: Retrieves the threat defense high availability failover policy interface MAC addresses record associated with the specified threat defense HA pair. If no ID is specified for a GET, it retrieves the list of all threat defense high availability failover policy interface MAC addresses records.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/
{hacontainer_UUID}/failoverinterfacemacaddressconfigs
```

URL for GET by ID :

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/
{hacontainer_UUID}/failoverinterfacemacaddressconfigs/{object_UUID}
```

Permissions: Devices > Device Management

## POST failoverinterfacemacaddressconfigs

Request Type: **POST**

Description: Creates the threat defense high availability failover policy interface MAC addresses record associated with the specified threat defense high availability pair.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/
{hacontainer_UUID}/failoverinterfacemacaddressconfigs
```

Permissions: Devices > Device Management > Modify Devices

## PUT failoverinterfacemacaddressconfigs

Request Type: **PUT**

Description: Modifies the threat defense high availability failover policy interface MAC addresses record associated with the specified threat defense high availability pair.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/
{hacontainer_UUID}/failoverinterfacemacaddressconfigs/{object_UUID}
```

Permissions: Devices > Device Management > Modify Devices

## GET monitoredinterfaces

Request Type: **GET**

Description: Retrieves the threat defense high availability Monitored interface policy record associated with the specified threat defense HA pair. If no ID is specified for a GET, it retrieves the list of all threat defense high availability monitored interface policy records.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{hacontainer_UUID}/monitoredinterfaces
```

URL for GET by ID :

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{hacontainer_UUID}/monitoredinterfaces/{object_UUID}
```

Permissions: Devices > Device Management

## PUT monitoredinterfaces

Request Type: **PUT**

Description: Modifies the threat defense high availability Monitored interface policy record associated with the specified threat defense high availability pair.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/devicehapairs/ftddevicehapairs/{hacontainer_UUID}/monitoredinterfaces
```

Permissions: Devices > Device Management > Modify Devices

## Health Services

### GET tunnelstatuses

Request Type: **GET**

Description: Retrieves tunnel status for S2S VPN on all managed threat defenses.

URL: /api/fmc\_config/v1/domain/{domainUUID}/health/tunnelstatuses

Permissions: Devices > Device Management

Parameters available for filtering: `vpnTopologyId:{uuid}` which filters the tunnel statuses by S2S VPN Topology id, `deviceId:{UUID}` which filters the tunnel statuses by Device id, `status:{TUNNEL_UP|TUNNEL_DOWN|UNKNOWN}` which filters the tunnel statuses by Tunnel Status and `sortBy{:<|>}{Topology|Device|Status|LastChange}`. Filter operators : and < sorts in ascending order and > sorts in descending order.

### GET tunnelsummaries

Request Type: **GET**

Description: Retrieves aggregated summary of tunnel status for S2S VPN on all managed threat defenses.

URL: `/api/fmc_config/v1/domain/{domainUUID}/health/tunnelsummaries`

Permissions: Devices > Device Management

Parameters available for filtering: `vpnTopologyId:{uuid}` which filters the tunnel summary by S2S VPN Topology id, `deviceId:{UUID}` which filters the tunnel summary by Device id and `groupBy:Topology|Device` which groups tunnel summary by Topology or Device.,

## GET Health Alerts

Request Type: **GET**

Description: Retrieves health alerts.

URL: `/api/fmc_config/v1/domain/{domainUUID}/health/alerts`

Permissions: System > Health > Health Events

Parameters available for filtering: `startTime`, `endTime`, `deviceUUIDs`, `status`, `moduleIDs`

## GET Health Metrics

Request Type: **GET**

Description: Retrieves health monitor metrics for the device.

URL: `/api/fmc_config/v1/domain/{domainUUID}/health/metrics`

Permissions: System > Health > Health Events

Parameters available for filtering: `deviceUUIDs`, `metric`, `startTime`, `endTime`, `step`, `regexFilter`, `queryFunction`

## Chassis

### GET fmcmanagedchassis

Request Type: **GET**

Description: Retrieves information on the specified chassis managed device. If no ID is given, retrieves list of all chassis managed devices.

URL: `/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{objectId}`

Permissions: Devices > Device Management

### GET networkmodules

Request Type: **GET**

Description: Retrieves the information about the network module object associated with the ID. If no ID is specified, retrieves list of all network modules.



URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/networkmodules`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/networkmodules/{objectId}`

Permissions: Devices > Device Management

## PUT networkmodules

Request Type: **PUT**

Description: Modifies the specified network modules.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/networkmodules/{objectId}`

Permissions: Devices > Device Management > Modify Devices

## PUT syncnetworkmodule

Request Type: **PUT**

Description: Retrieve Network module data from FXOS and updates management center.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/operational/syncnetworkmodule`

Permissions: Devices > Device Management > Modify Devices

## GET chassisinterfaces

Request Type: **GET**

Description: Retrieves the chassis interfaces associated with the ID. If no ID is specified, retrieves list of all chassis interfaces.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/chassisinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/chassisinterfaces/{interfaceUUID}`

Permissions: Devices > Device Management

## GET networkmodules

Request Type: **GET**

Description: Retrieves the information about the network module object associated with the ID. If no ID is specified, retrieves list of all network modules.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/networkmodules`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/chassis/fmcmanagedchassis/{containerUUID}/networkmodules/{objectId}`

Permissions: Devices > Device Management

## Device Services

### POST copyconfigrequests

Request Type: **POST**

Description: Copies device configuration to the specified threat defense device.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devices/copyconfigrequests`

Permissions: Devices > Device Management > Modify Devices

### POST exports

Request Type: **POST**

Description: Package and export device configuration of specified threat defenses

URL: `/api/fmc_config/v1/domain/{domainUUID}/devices/operational/exports`

Permissions: System > Tools > Import/Export

### POST imports

Request Type: **POST**

Description: Import device configuration from specified source for threat defenses.

URL: `/api/fmc_config/v1/domain/{domainUUID}/devices/operational/imports`

Permissions: System > Tools > Import/Export

### GET bgp routing

Request Type: **GET**

Description: Retrieves list of all BGP (ipv4 and ipv6) associated with the specified device for specified vrf. If no device is specified, retrieves list of all BGP.

URL: `/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp/{objectId}`

Permissions: Devices > Device Management

## PUT bgp

Request Type: **PUT**

Description: Modifies BGP (ipv4 and ipv6) associated with the specified device for specified vrf.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp/{objectId}`

Permissions: Devices > Device Management > Modify Devices

## POST bgp

Request Type: **POST**

Description: Creates BGP (ipv4 and ipv6) associated with the specified device for specified vrf.

URL: `/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp`

Permissions: Devices > Device Management > Modify Devices

## DELETE bgp

Request Type: **DELETE**

Description: Deletes the specified bgp object.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp/{objectId}`

Permissions: Devices > Device Management > Modify Devices

## DELETE devicerecords

Request Type: **DELETE**

Description: Unregisters the specified device.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{object_UUID}`

Permissions: Devices > Device Management > Modify Devices

## PUT devicerecords

Request Type: **PUT**

Description: Modifies the device record associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{object_UUID}`

Permissions: Devices > Device Management > Modify Devices

## POST devicerecords

Request Type: **POST**

Description: Registers the specified device to the management center.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords`

Permissions: Devices > Device Management > Modify Devices

## GET devicerecords

Request Type: **GET**

Description: Retrieves device information. If a device ID is specified, the information for the specified device is retrieved. If no ID is specified, retrieves information for all devices.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{object_UUID}`

Permissions: Devices > Device Management

Parameters available for filtering: hostName

## PUT fpphysicalinterfaces

Request Type: **PUT**

Description: Modifies a physical interface on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/fpphysicalinterfaces/{object_UUID}`

Permissions: Devices > Device Management > Modify Device

## GET fpphysicalinterfaces

Request Type: **GET**

Description: Retrieves information on the physical interface associated with the specified NGIPS device ID and interface ID. If no ID is specified, retrieves list of all physical interfaces associated with the specified NGIPS device ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fpphysicalinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fpphysicalinterfaces/{object_UUID}`

Permissions: Devices > Device Management

Parameters available for filtering: name

## DELETE fplogicalinterfaces

Request Type: **DELETE**

Description: Deletes logical interfaces on the specified device.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{containerUUID}/fplogicalinterfaces/{object\_UUID}

Permissions: Devices > Device Management > Modify Device

## PUT fplogicalinterfaces

Request Type: **PUT**

Description: Modifies a logical interface on the specified device.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/fplogicalinterfaces/{object\_UUID}

Permissions: Devices > Device Management > Modify Device

## POST fplogicalinterfaces

Request Type: **POST**

Description: Creates logical interfaces on the specified device.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/fplogicalinterfaces

Permissions: Devices > Device Management > Modify Device

## GET fplogicalinterfaces

Request Type: **GET**

Description: Retrieves the logical interface associated with the specified NGIPS device ID and interface ID. If no ID is specified, retrieves list of all logical interfaces associated with the specified NGIPS device ID.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/fplogicalinterfaces

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/fplogicalinterfaces/{object\_UUID}

Permissions: Devices > Device Management

Parameters available for filtering: name

## DELETE inlinesets

Request Type: **DELETE**

Description: Deletes inline sets on the specified device.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{containerUUID}/inlinesets/{object\_UUID}

Permissions: Devices > Device Management > Modify Device

## PUT inlinesets

Request Type: **PUT**

Description: Modifies an inline set on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/inlinesets/{object_UUID}`

Permissions: Devices > Device Management > Modify Device

## POST inlinesets

Request Type: **POST**

Description: Creates inline sets on the specified device.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/inlinesets`

Permissions: Devices > Device Management > Modify Device

## GET inlinesets

Request Type: **GET**

Description: Retrieves information on the inline set associated with the specified NGIPS device ID and inline set ID. If no inline set ID is specified, retrieves list of all inline sets associated with the specified NGIPS device ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/inlinesets`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/inlinesets/{object_UUID}`

Permissions: Devices > Device Management

Parameters available for filtering: name

## GET Metrics

Request Type: **GET**

Description: Retrieves HealthMonitor metrics for the device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/operational/metrics`

Permissions: Devices > Device Management

Parameters available for filtering: metric

## GET staticroutes

Request Type: **GET**

Description: Retrieves the static route associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all static routes associated with the specified NGFW device ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/staticroute`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/staticroutes/{objectId}`

Permissions: Devices > Device Management

## GET virtualrouters

Request Type: **GET**

Description: Retrieves the the virtual router with the specified ID. If no ID is specified, retrieves list of all virtual routers.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{objectId}`

Permissions: Devices > Device Management

## PUT virtual routers

Request Type: **PUT**

Description: Modifies a virtual router on the specified device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{objectId}`

Permissions: Devices > Device Management > Modify Device

## POST virtual routers

Request Type: **POST**

Description: Creates virtual routers associated with the specified container.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters`

Permissions: Devices > Device Management > Modify Device

## DELETE virtual routers

Request Type: **DELETE**

Description: Deletes the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{objectId}`

Permissions: Devices > Device Management > Modify Device

## GET virtual BGP

Request Type: **GET**

Description: Retrieves specified BGP (ipv4 and ipv6) on the specified virtual router. If no ID is specified, retrieves list of all BGP on the virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes/{objectId}`

Permissions: Devices > Device Management

## PUT virtual bgp

Request Type: **PUT**

Description: Modifies BGP (ipv4 and ipv6) associated with the specified device for specified vrf.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/bgp/{objectId}`

Permissions: Devices > Device Management > Modify Devices

## POST virtual bgp

Request Type: **POST**

Description: Creates BGP (ipv4 and ipv6) associated with the specified device for specified vrf.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/bgp`

Permissions: Devices > Device Management > Modify Devices

## DELETE virtual bgp

Request Type: **DELETE**

Description: Deletes BGP (ipv4 and ipv6) associated with the specified device for specified vrf.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/bgp/{objectId}`

Permissions: Devices > Device Management > Modify Devices

## GET virtual ipv4staticroutes

Request Type: **GET**

Description: Retrieves specified IPv4 static route on the specified virtual router. If no ID is specified, retrieves list of all IPv4 static routes on the virtual router.



URL:

`/api/fire_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv4staticroutes`

URL for GET by ID:

`/api/fire_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv4staticroutes/{objectId}`



**Note** The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management

## PUT virtual ipv4 static routes

Request Type: **PUT**

Description: Modifies an IPv4 static route on the specified device.

URL:

`/api/fire_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv4staticroutes/{objectId}`



**Note** The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

## POST virtual ipv4 static routes

Request Type: **POST**

Description: Creates IPv4 static routes associated with the specified virtual router.

URL:

`/api/fire_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv4staticroutes`



**Note** For static routes (IPv4), the methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

## DELETE virtual ipv4 static routes

Request Type: **DELETE**

Description: Deletes the specified IPv4 static route.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv4staticroutes/{objectId}`



**Note** The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

## GET virtual ipv6staticroutes

Request Type: **GET**

Description: Retrieves specified IPv6 static route on the specified virtual router. If no ID is specified, retrieves list of all IPv6 static routes on the virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes/{objectId}`



**Note** The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management

## PUT virtual ipv6 static routes

Request Type: **PUT**

Description: Modifies a bridge group interface on the specified device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes/{objectId}`



**Note** The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

## POST virtual ipv6 static routes

Request Type: **POST**

Description: Creates IPv6 static routes associated with the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes`



**Note** The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

## DELETE virtual ipv6 static routes

Request Type: **DELETE**

Description: Deletes the specified IPv6 static route.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ipv6staticroutes/{objectId}`



**Note** The methods and payload are same as for static route endpoints. If there is a route leak, a warning is returned with response code 400. However, if you make the REST call with query parameter `ignoreWarning=true`, the warning is ignored. This behavior is applicable with Global VRF static route as well.

Permissions: Devices > Device Management > Modify Device

## GET virtual ospf interface

Request Type: **GET**

Description: Retrieves specified OSPF interface associated with the specified virtual router. If no ID is specified, retrieves list of all OSPF interfaces associated with the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfinterface`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfinterface/{objectId}`

Permissions: Devices > Device Management

## GET virtual ospfv2 routes

Request Type: **GET**

Description: Retrieves specified OSPFV2 process associated with the specified virtual router. If no ID is specified, retrieves list of all OSPF v2 process associated with the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfv2routes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfv2routes/{objectId}`

Permissions: Devices > Device Management

## GET virtual static routes

Request Type: **GET**

Description: Retrieves specified static routes (ipv4 and ipv6) associated with the specified virtual router. If no ID is specified, retrieves list of all Static routes (ipv4 and ipv6) associated with the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/staticroutes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/staticroutes/{objectId}`

Permissions: Devices > Device Management

## DELETE ipv4staticroutes

Request Type: **DELETE**

Description: Deletes the IPv4 Static Route associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv4staticroutes/{object_UUID}`

Permissions: Devices > Devices Management > Modify Devices

## PUT ipv4staticroutes

Request Type: **PUT**

Description: Modifies the IPv4 Static Route associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv4staticroutes/{object_UUID}`

Permissions: Devices > Devices Management > Modify Devices

## POST ipv4staticroutes

Request Type: **POST**

Description: Creates an IPv4 Static Route.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv4staticroutes`

Permissions: Devices > Device Management > Modify Devices

## GET ipv4staticroutes

Request Type: **GET**

Description: Retrieves the IPv4 Static Route associated with the specified ID. If no ID is specified, retrieves list of all IPv4 Static Routes.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv4staticroutes`

URL for GET ID::

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv4staticroutes/{object_UUID}`

Permissions: Devices > Devices Management

## DELETE ipv6staticroutes

Request Type: **DELETE**

Description: Deletes the IPv6 Static Route associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv6staticroutes/{object_UUID}`

Permissions: Devices > Device Management > Modify Devices

## PUT ipv6staticroutes

Request Type: **PUT**

Description: Modifies the IPv6 Static Route associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv6staticroutes/{object_UUID}`

Permissions: Devices > Device Management > Modify Devices

## POST ipv6staticroutes

Request Type: **POST**

Description: Creates an IPv6 Static Route.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv6staticroutes`

Permissions: Devices > Device Management > Modify Devices

## GET ipv6staticroutes

Request Type: **GET**

Description: Retrieves the IPv6 Static Route associated with the specified ID. If no ID is specified, retrieves list of all IPv6 Static Routes.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv6staticroutes`

URL for GET ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ipv6staticroutes/{object_UUID}`

Permissions: Devices > Device Management

## GET ospf interface

Request Type: **GET**

Description: Retrieves the OSPF interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all OSPF interfaces associated with the specified NGFW device ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfinterface`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ospfinterface/{objectId}`

Permissions: Devices > Device Management

## GET ospfv2routes

Request Type: **GET**

Description: Retrieves OSPF V2 routes associated with the specified ID. If no ID is specified, retrieves list of all OSPF v2 routes.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv2routes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv2routes/{objectId}`

Permissions: Devices > Device Management

## GET ospfv3interfaces

Request Type: **GET**

Description: Retrieves OSPF v3 interface associated with the specified ID. If no ID is specified, retrieves a list of all OSPF v3 interfaces.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv3interfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv3interfaces/{objectId}`

Permissions: Devices > Device Management

## GET ospfv3routes

Request Type: **GET**

Description: Retrieves the OSPfv3 process associated with the specified ID. If no ID is specified, retrieves list of all OSPFv3 processes.

URL:

```
/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv3routes
```

URL for GET by ID:

```
/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ospfv3routes/{objectID}
```

Permissions: Devices > Device Management

## GET ecmpzones

Request Type: **GET**

Description: Retrieves the ECMP Zone associated with the specified ID. If no ID is specified, retrieves list of all ECMP Zones.

URL:

```
/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ecmpzones
```

URL for GET by ID:

```
/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ecmpzones/{objectID}
```

Permissions: Policies > Network Discovery > Custom Topology

## PUT ecmpzones

Request Type: **PUT**

Description: Modifies the ECMP Zone associated with the specified ID.

URL:

```
/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ecmpzones/{objectID}
```

Permissions: Policies > Network Discovery > Custom Topology > Modify Custom Topology

## POST ecmpzones

Request Type: **POST**

Description: Creates an ECMP Zone.

URL:

```
/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ecmpzones
```

Permissions: Policies > Network Discovery > Custom Topology > Modify Custom Topology

## DELETE ecmpzones

Request Type: **DELETE**

Description: Deletes the ECMP Zone associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ecmpzones/{objectId}`

Permissions: Policies > Network Discovery > Custom Topology > Modify Custom Topology

## GET virtual ecmpzones

Request Type: **GET**

Description: Retrieves the ECMP Zone for the specified virtual router associated with the specified ID. If no ID is specified, retrieves list of all ECMP Zones.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ecmpzones`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ecmpzones/{objectId}`

Permissions: Policies > Network Discovery > Custom Topology

## PUT virtual ecmpzones

Request Type: **PUT**

Description: Modifies the ECMP Zone for the specified virtual router associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ecmpzones/{objectId}`

Permissions: Policies > Network Discovery > Custom Topology > Modify Custom Topology

## POST virtual ecmpzones

Request Type: **POST**

Description: Creates an ECMP Zone for the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/ecmpzones/`

Permissions: Policies > Network Discovery > Custom Topology > Modify Custom Topology

## DELETE virtual ecmpzones

Request Type: **DELETE**

Description: Deletes the ECMP Zone for the specified virtual router associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/ecmpzones/{objectId}`

Permissions: Policies > Network Discovery > Custom Topology > Modify Custom Topology



## POST packettracer

Request Type: **POST**

Description: Retrieves the Packet Tracer command output for a threat defense or Cluster.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/operational/packettracer`

Permissions: Devices > Troubleshoot > Packet Tracer > Modify Packet Tracer

## POST packettracerpcap

Request Type: **POST**

Description: Retrieves the Packet Tracer using a PCAP file command output for a device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/operational/packettracerpcap`

Permissions: Devices > Troubleshoot > Packet Capture > Modify Packet Capture

## GET policybasedroutes

Request Type: **GET**

Description: Retrieves the specified Policy Based Route. If no ID is specified, retrieves a list of all Policy Based Routes.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/policybasedroutes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/policybasedroutes/{objectId}`

Permissions: Devices > Device Management

## PUT policybasedroutes

Request Type: **PUT**

Description: Modifies the Policy Based Route.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/policybasedroutes/{objectId}`

Permissions: Devices > Device Management > Modify Devices

## POST policybasedroutes

Request Type: **POST**

Description: Creates the Policy Based Route.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/policybasedroutes`

Permissions: Devices > Device Management > Modify Devices

## DELETE policybasedroutes

Request Type: **DELETE**

Description: Deletes the Policy Based Route.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/policybasedroutes/{objectId}`

Permissions: Devices > Device Management > Modify Devices

## GET virtualpolicybasedroutes

Request Type: **GET**

Description: Retrieves the specified Policy Based Route associated for the specified virtual router. If no ID is specified, retrieves a list of all Policy Based Routes.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/policybasedroutes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/policybasedroutes/{objectId}`

Permissions: Devices > Device Management

## PUT virtualpolicybasedroutes

Request Type: **PUT**

Description: Modifies the Policy Based Route associated for the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/policybasedroutes/{objectId}`

Permissions: Devices > Device Management > Modify Devices

## POST virtualpolicybasedroutes

Request Type: **POST**

Description: Creates the Policy Based Route associated for the specified virtual router.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/policybasedroutes`

Permissions: Devices > Device Management > Modify Devices

## DELETE virtualpolicybasedroutes

Request Type: **DELETE**

Description: Deletes the Policy Based Route associated for the specified virtual router.

URL:

`/api/fmc_config/v1/drain/{drainUUID}/devices/devicerecords/{containerUUID}/routing/virtualrouters/{virtualrouterUUID}/policybasedrules/{objectId}`

Permissions: Devices > Device Management > Modify Devices

## GET vteppolicies

Request Type: **GET**

Description: Retrieves the VTEP Policy associated with the specified NGFW device ID and policy ID. If no ID is specified, retrieves list of all VTEP Policies associated with the specified NGFW device ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vteppolicies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vteppolicies/{objectId}`

Permissions: Devices > Device Management

## PUT vteppolicies

Request Type: **PUT**

Description: Modifies the VTEP Policy associated with the specified NGFW device ID and policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vteppolicies/{objectId}`

Permissions: Devices > Device Management > Modify Devices

## POST vteppolicies

Request Type: **POST**

Description: Creates a VTEP Policy on the specified NGFW device I.

URL: `/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vteppolicies`

Permissions: Devices > Device Management > Modify Devices

## DELETE vteppolicies

Request Type: **DELETE**

Description: Deletes the VTEP Policy associated with the specified NGFW device ID and policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vteppolicies/{objectId}`

Permissions: Devices > Device Management > Modify Devices

## DELETE virtualswitches

Request Type: **DELETE**

Description: Deletes a virtual switch on the specified device.

**This method is only available on a Firepower 1010 device.**

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/virtualswitches/{object_UUID}`

Permissions: Devices > Device Management > Modify Device

## PUT virtualswitches

Request Type: **PUT**

Description: Modifies a virtual switch on the specified device.

**This method is only available on a Firepower 1010 device.**

URL:

`/api/fmc_config/v1/domain/{UUID}/devices/devicerecords/{containerUUID}/virtualswitches/{object_UUID}`

Permissions: Devices > Device Management > Modify Device

## POST virtualswitches

Request Type: **POST**

Description: Creates a virtual switch on the specified device.

**This method is only available on a Firepower 1010 device.**

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/virtualswitches`

Permissions: Devices > Device Management > Modify Device

## GET virtualswitches

Request Type: **GET**

Description: Retrieves virtual switch associated with the specified NGIPS device ID and virtual switch ID. If no virtual switch ID is specified, retrieves list of all virtual switches associated with the specified NGIPS device ID.

**This method is only available on a Firepower 1010 device.**

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/virtualswitches`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/virtualswitches/{object_UUID}`

Permissions: Devices > Device Management

Parameters available for filtering: name

## GET Virtual Tunnel Interfaces

Request Type: **GET**

Description: Retrieves the virtual tunnel interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all virtual tunnel interfaces associated with the specified NGFW device ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/virtualtunnelinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/virtualtunnelinterfaces/{objectId}`

Permissions: Devices > VPN

Parameters available for filtering: none

## PUT Virtual Tunnel Interfaces

Request Type: **PUT**

Description: modifies the virtual tunnel interface associated with the specified NGFW device ID and/or interface ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/virtualtunnelinterfaces/{objectId}`

Permissions: Devices > VPN > Modify VPN

## POST Virtual Tunnel Interfaces

Request Type: **POST**

Description: Creates a virtual tunnel interface on the NGFW device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/virtualtunnelinterfaces`

Permissions: Devices > VPN > Modify VPN

## DELETE Virtual Tunnel Interfaces

Request Type: **DELETE**

Description: Deletes the virtual tunnel interface associated with the specified NGFW device ID and interface ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/virtualtunnelinterfaces/{objectId}`

Permissions: Devices > VPN > Modify VPN

## DELETE vlaninterfaces

Request Type: **DELETE**

Description: Deletes the vlan interface associated with the specified NGFW device ID and interface ID.

**This method is only available on a Firepower 1010 device.**

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/vlaninterfaces/{object\_UUID}

Permissions: Devices > VPN > Modify VPN

## PUT vlaninterfaces

Request Type: **PUT**

Description: Modifies the vlan interface associated with the specified NGFW device ID and interface ID.

**This method is only available on a Firepower 1010 device.**

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/vlaninterfaces/{object\_UUID}

Permissions: Devices > VPN > Modify VPN

## POST vlaninterfaces

Request Type: **POST**

Description: Creates a vlan interface on the NGFW device.

**This method is only available on a Firepower 1010 device.**

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/vlaninterfaces

Permissions: Devices > VPN > Modify VPN

## GET vlaninterfaces

Request Type: **GET**

Description: Retrieves the vlan interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all vlan interfaces associated with the specified NGFW device ID.

**This method is only available on a Firepower 1010 device.**

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/vlaninterfaces

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/devices/devicerecords/{container\_UUID}/vlaninterfaces/{object\_UUID}

Permissions: Devices > VPN

Parameters available for filtering: name

## GET vniinterfaces

Request Type: **GET**

Description: Retrieves the VNI interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves a list of all VNI interfaces on the NGFW device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vniinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vniinterfaces/{objectId}`

Permissions: Devices > Device Management

## PUT vniinterfaces

Request Type: **PUT**

Description: Modifies the VNI interface associated with the specified NGFW device ID and interface ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vniinterfaces/{objectId}`

Permissions: Devices > Device Management > Modify Devices

## POST vniinterfaces

Request Type: **POST**

Description: Creates a VNI interface on the specified NGFW device.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vniinterfaces`

Permissions: Devices > Device Management > Modify Devices

## DELETE vniinterfaces

Request Type: **DELETE**

Description: Retrieves the VNI interface associated with the specified NGFW device ID and interface ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/vniinterfaces/{objectId}`

Permissions: Devices > Device Management > Modify Devices

## PUT fpphysicalinterfaces

Request Type: **PUT**

Description: Modifies a physical interface on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/fpphysicalinterfaces/{object_UUID}`

Permissions: Devices > Device Management > Modify Device

## GET fpphysicalinterfaces

Request Type: **GET**

Description: Retrieves information on the physical interface associated with the specified NGIPS device ID and interface ID. If no ID is specified, retrieves list of all physical interfaces associated with the specified NGIPS device ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fpphysicalinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fpphysicalinterfaces/{object_UUID}`

Permissions: Devices > Device Management

Parameters available for filtering: name

## PUT physicalinterfaces

Request Type: **PUT**

Description: Modifies physical interfaces on a specified device.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/physicalinterfaces`

Permissions: Devices > Device Management > Modify Device

## GET physicalinterfaces

Request Type: **GET**

Description: Retrieves the physical interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all physical interfaces associated with the specified NGFW device ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/physicalinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/physicalinterfaces/{object_UUID}`

Permissions: Devices > Device Management

## GET bridgegroupinterfaces

Request Type: **GET**

Description: Retrieves the bridge group interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all bridge group interfaces associated with the specified NGFW device ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/bridgegroupinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/bridgegroupinterfaces/{object_UUID}`

Permissions: Devices > Device Management



## POST bridgegroupinterfaces

Request Type: **POST**

Description: Creates bridge group interfaces associated with the specified NGFW device ID and interface ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/bridgegroupinterfaces`

Permissions: Devices > Device Management > Modify Device

## PUT bridgegroupinterfaces

Request Type: **PUT**

Description: Modifies a bridge group interface on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/bridgegroupinterfaces`

Permissions: Devices > Device Management > Modify Device

## DELETE bridgegroupinterfaces

Request Type: **DELETE**

Description: Deletes a bridge group interface associated with the specified NGFW device ID and interface ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/bridgegroupinterfaces`

Permissions: Devices > Device Management > Modify Device

## GET redundantinterfaces

Request Type: **GET**

Description: Retrieves the redundant interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all redundant interfaces associated with the specified NGFW device ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/redundantinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/redundantinterfaces/{object_UUID}`

Permissions: Devices > Device Management

## POST redundantinterfaces

Request Type: **POST**

Description: Creates redundant interfaces on a specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/redundantinterfaces`

Permissions: Devices > Device Management

## PUT redundantinterfaces

Request Type: **PUT**

Description: Modifies redundant interfaces on a specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/redundantinterfaces`

Permissions: Devices > Device Management > Modify Device

## DELETE redundantinterfaces

Request Type: **DELETE**

Description: Removes redundant interfaces on a specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/redundantinterfaces`

Permissions: Devices > Device Management

## GET bgp routing

Request Type: **GET**

Description: Retrieves list of all BGP (ipv4 and ipv6) associated with the specified device for specified vrf. If no device is specified, retrieves list of all BGP.

URL: `/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgp/{objectId}`

Permissions: Devices > Device Management

## GET bgp general settings

Request Type: **GET**

Description: Retrieves BGP general settings associated with the specified device. If no device is specified, retrieves list of all BGP general settings.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgpgeneralsettings`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgpgeneralsettings/{objectId}`

Permissions: Devices > Device Management

## PUT bgpgeneralsettings

Request Type: **PUT**

Description: Modifies the specified BGP general settings.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgpgeneralsettings/{objectId}`

Permissions: Devices > Device Management > Modify Devices

## POST bgpgeneralsettings

Request Type: **POST**

Description: Creates BGP general settings.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgpgeneralsettings`

Permissions: Devices > Device Management > Modify Devices

## DELETE bgpgeneralsettings

Request Type: **DELETE**

Description: Deletes the BGP general settings.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/routing/bgpgeneralsettings/{objectId}`

Permissions: Devices > Device Management > Modify Devices

## GET etherchannelinterfaces

Request Type: **GET**

Description: Retrieves the ethernet channel interface associated with the specified NGFW device ID and interface ID. If no ID is specified, retrieves list of all ethernet channel interfaces associated with the specified NGFW device ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/etherchannelinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/etherchannelinterfaces/{object_UUID}`

Permissions: Devices > Device Management

Parameters available for filtering:

## POST etherchannelinterfaces

Request Type: **POST**

Description: Creates ethernet channel interfaces on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/ethernetchannelinterfaces`

Permissions: Devices > Device Management > Modify Device

## PUT etherchannelinterfaces

Request Type: **PUT**

Description: Modifies an ethernet channel interfaces on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{containerUUID}/ethernetchannelinterfaces/`

Permissions: Devices > Device Management > Modify Device

## DELETE etherchannelinterfaces

Request Type: **DELETE**

Description: Removes ethernet channel interfaces from a specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/ethernetchannelinterfaces`

Permissions: Devices > Device Management

## GET subinterfaces

Request Type: **GET**

Description: Retrieves the sub-interface associated with the specified NGFW device ID and interface ID. If no interface ID is specified, retrieves list of all sub-interfaces associated with the specified NGFW device ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/subinterfaces`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/subinterfaces/{object_UUID}`

Permissions: Devices > Device Management

## POST subinterfaces

Request Type: **POST**

Description: Creates sub interfaces on a specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/subinterfaces`

Permissions: Devices > Device Management

## PUT subinterfaces

Request Type: **PUT**

Description: Modifies a sub interface on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/subinterfaces/`

Permissions: Devices > Device Management > Modify Device

## DELETE subinterfaces

Request Type: **DELETE**

Description: Deletes sub interfaces on a specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/subinterfaces`

Permissions: Devices > Device Management

## GET fpinterfacestatistics

Request Type: **GET**

Description: Retrieves list of statistics for all interfaces associated with the specified NGIPS device ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/fpinterfacestatistics`

Permissions: Devices > Device Management

Parameters available for filtering: name

## POST interfaceevents

Request Type: **POST**

Description: Creates netmod events on the specified device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/interfaceevents`

Permissions: Devices > Device Management > Modify Device

## GET interfaceevents

Request Type: **GET**

Description: Retrieves list of all netmod events on the device.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/devices/devicerecords/{container_UUID}/interfaceevents`

Permissions: Devices > Device Management

## GET commands

Request Type: **GET**

Description: Retrieves the list of all command line interface commands available on the device. If a command is specified in the payload, retries the output of that command.

The below table lists the commands which can be used with the `commands` service. Some commands are only allowed with certain parameters, or specific parameters may not be allowed, as specified in the **Blocked** column.

Command	Blocked
show version	
show failover	
show dhcpd	show dhcpd binding, show dhcpd statistics
show ip	
show aaa-server	
show logging	show logging asdm, show logging queue
show snmp-server	
show running-config {any}	show running-config {no parameters}
show ssl	
show firewall	
show logging	
show network	
show ntp	
show banner	

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/operational/commands`

Permissions: Devices > Device Management

## GET ftdallinterfaces

Request Type: **GET**

Description: Retrieves all types of interfaces.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/devices/devicerecords/{containerUUID}/ftdallinterfaces`

Permissions: Devices > Device Management

Parameters available for filtering: `filter`: This is a query parameter to fetch specific type of interfaces.

Supported Filter Criteria are :

`cclEligibleInterface: {boolean}; interfaceMode: {mode}; virtualRouterId: {uuid}; named: {boolean};`

`cclEligibleInterface` : Filter to get ccl eligible interface, filter value should always be true. `interfaceMode` : Filter using interface mode. Supported only for routed device. Allowed value is `ROUTED` Cannot be used with `cclEligibleInterface` filter. `virtualRouterId` : Supported only for routed device. Cannot be used with `cclEligibleInterface` filter. `named` : Supported only for routed device. Cannot be used with `cclEligibleInterface` filter.

## Intelligence Services

### POST collections

Request Type: **POST**

Description: Adds a collections from a TAXII source.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/taxiiconfig/collections`

Permissions: Intelligence

### POST discoveryinfo

Request Type: **POST**

Description: Adds information about TAXII collections available from a source.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/taxiiconfig/discoveryinfo`

Permissions: Intelligence

### GET element

Request Type: **GET**

Description: Retrieves the intelligence-enabled sensor associated with the specified ID. If no ID is specified, retrieves list of all intelligence-enabled sensors.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/element`

URL for GET by ID: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/element/{object_UUID}`

Permissions: Intelligence

### DELETE incident

Request Type: **DELETE**

Description: Deletes an incident.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/taxiiconfig/incident/{object_UUID}`

Permissions: Intelligence

## PUT incident

Request Type: **PUT**

Description: Modifies an intelligence incident with the specified object ID.




---

**Note** As of 7.1.0 `whitelist` is now `allowlist`

---

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/incident/{object_UUID}`

Permissions: Intelligence

## GET incident

Request Type: **GET**

Description: Retrieves the intelligence incident associated with the specified ID. If no ID is specified, retrieves list of all intelligence incidents. By default 25 results will be displayed on each page, this can be increased up to 40 using the `limit` parameter.




---

**Note** As of 7.1.0 `whitelist` is now `allowlist`

---

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/incident`

URL for GET by ID: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/incident/{object_UUID}`

Permissions: Intelligence

## PUT indicator

Request Type: **PUT**

Description: Modifies an indicator with the specified object ID.




---

**Note** As of 7.1.0 `whitelist` is now `allowlist`

---

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/indicator/{object_UUID}`

Permissions: Intelligence

## GET indicator

Request Type: **GET**

Description: Retrieves the indicator associated with the specified ID. If no ID is specified, retrieves list of all indicators. By default 25 results will be displayed on each page, this can be increased up to 40 using the `limit` parameter.





---

**Note** As of 7.1.0 `whitelist` is now `allowlist`

---

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/indicator`

URL for GET by ID: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/indicator/{object_UUID}`

Permissions: Intelligence

## PUT observable

Request Type: **PUT**

Description: Modifies an observable with the specified object ID.



---

**Note** As of 7.1.0 `whitelist` is now `allowlist`

---

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/observable/{object_UUID}`

Permissions: Intelligence

## GET observable

Request Type: **GET**

Description: Retrieves the observable associated with the specified ID. If no ID is specified, retrieves list of all observables. By default 25 results will be displayed on each page, this can be increased up to 40 using the `limit` parameter.



---

**Note** As of 7.1.0 `whitelist` is now `allowlist`

---

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/observable`

URL for GET by ID: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/observable/{object_UUID}`

Permissions: Intelligence

## PUT settings

Request Type: **PUT**

Description: Activates or deactivates an intelligence setting.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/settings/{value}`

Permissions: Intelligence

## GET settings

Request Type: **GET**

Description: Retrieves the on/off settings for the specified value. If no ID is specified, retrieves list of all TID settings.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/settings`

URL for GET by value: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/settings/{value}`

Permissions: Intelligence

## DELETE source

Request Type: **DELETE**

Description: Deletes an intelligence source from the device.

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/taxiiconfig/source/{object_UUID}`

Permissions: Intelligence

## PUT source

Request Type: **PUT**

Description: Modifies an intelligence source with the specified object ID.



---

**Note** As of 7.1.0 `whitelist` is now `allowlist`

---

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/source/{object_UUID}`

Permissions: Intelligence

## POST source

Request Type: **POST**

Description: Adds a source for intelligence information.



---

**Note** As of 7.1.0 `whitelist` is now `allowlist`

---

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/source`

Permissions: Intelligence

## GET source

Request Type: **GET**

Description: Retrieves the intelligence source associated with the specified ID. If no ID is specified, retrieves list of all intelligence sources. By default 25 results will be displayed on each page, this can be increased up to 40 using the `limit` parameter.



---

**Note** As of 7.1.0 `whitelist` is now `allowlist`

---

URL: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/source`

URL for GET by ID: `/api/fmc_tid/v1/domain/{domain_UUID}/tid/source/{object_UUID}`

Permissions: Intelligence

## Search

### GET globalsearch

Request Type: **GET**

Description: Search for objects and policies matching specified text or IP address.

URL: `/api/fmc_config/v1/domain/{domainUUID}/search/globalsearch`

Permissions: Analysis > Search

Parameters available for filtering: Text or IP address used for filtering.

### GET objectsearch

Request Type: **GET**

Description: Search for objects matching specified text or IP address.

URL: `/api/fmc_config/v1/domain/{domainUUID}/search/object`

Permissions: Analysis > Search

Parameters available for filtering: Text or IP address used for filtering.

### GET policysearch

Request Type: **GET**

Description: Search for policies matching specified text or IP address (literal values in policies).

URL: `/api/fmc_config/v1/domain/{domainUUID}/search/policy`

Permissions: Analysis > Search

Parameters available for filtering: Text or IP address used for filtering.

# Integration Services

## PUT cloudeventsconfigs

Request Type: **PUT**

Description: Modifies the cloud event configuration associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/cloudeventsconfigs/{objectId}`

Permissions: Object Manager > Modify Object Manager

## GET cloudeventsconfigs

Request Type: **GET**

Description: Retrieves the cloud event configuration associated with the specified ID. If no ID is specified for a GET, retrieves a list of all cloud event configuration objects.

URL for listing: `/api/fmc_config/v1/domain/{domainUUID}/integration/cloudeventsconfigs`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/integration/cloudeventsconfigs/{objectId}`

Permissions: Object Manager

## PUT cloudregions

Request Type: **PUT**

Description: Modifies the cloud region configuration associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/cloudregions/{object_UUID}`

Permissions: System > Integration > Cloud Services

## GET cloudregions

Request Type: **GET**

Description: Retrieves the cloud region configuration associated with the specified ID. If no ID is specified for a GET, retrieves list of all cloud regions.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/integration/cloudregions/`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/integration/cloudregions/{object_UUID}`

Permissions: System > Integration > Cloud Services

## DELETE externallookups

### DELETE externallookups

Description: Deletes the external lookup objects with the specified UUID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/externallookups/{object_UUID}`

Permissions: Object Manager>Modify Object Manager

## PUT externallookups

Request Type: **PUT**

Description: Modifies externallookups objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/externallookups/{object_UUID}`

Permissions: Object Manager>Modify Object Manager

## POST externallookups

### POST externallookups

Description: Creates externallookups objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/externallookups`

Permissions: Object Manager>Modify Object Manager

## GET externallookups

### GET externallookups

Retrieves the externallookups object associated with the specified ID. If no ID, retrieves list of all externallookups objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/externallookups`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/integration/externallookups/{object_UUID}`

Permissions: Object Manager>Modify Object Manager

Parameters available for filtering:

## DELETE packetanalyzerdevices

Request Type: **DELETE**

Description: Deletes the packet analyzer object with the specified UUID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/integration/packetanalyzerdevices/{object_UUID}`

Permissions: Object Manager>Modify Object Manager

## PUT packetanalyzerdevices

Request Type: **PUT**

Description: Modifies the packet analyzer object with the specified UUID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/integration/packetanalyzerdevices/{object\_UUID}

Permissions: Object Manager>Modify Object Manager

## POST packetanalyzerdevices

Request Type: **POST**

Description: Creates PKI enrollments objects with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/packetanalyzerdevices

Permissions: Object Manager

## GET packetanalyzerdevices

Request Type: **GET**

Description: Retrieves the packetanalyzerdevices object associated with the specified ID. If no ID, retrieves list of all packetanalyzerdevices objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/integration/packetanalyzerdevices

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/integration/packetanalyzerdevices/{object\_UUID}

Permissions: Object Manager>Modify Object Manager

Parameters available for filtering:

## GET External Storage

Request Type: **GET**

Description: Retrieves the external event storage configuration associated with the specified ID. If no ID is specified for a GET, retrieves a list of all external event storage configurations.

URL for listing: /api/fmc\_config/v1/domain/{domainUUID}/integration/externalstorage

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/integration/externalstorage/{objectId}

Permissions: System > Integration

Parameters available for filtering: None

## PUT External Storage

Request Type: **PUT**

Description: Modifies the external event storage configuration associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/externalstorage/{objectId}`

Permissions: System > Integration

## GET FMC HA Statuses

Request Type: **GET**

Description: Retrieves management center HA Statuses.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/fmchastatuses`

Permissions: System>Integration>High Availability

## GET dynamicattributesfeeds

Request Type: **GET**

Description: Retrieves Dynamic Attributes Feeds.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/dynamicattributesfeeds`

Permissions: Devices > VPN

## PUT dynamicattributesfeeds

Request Type: **PUT**

Description: Updates Dynamic Attributes Feeds.t.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/dynamicattributesfeeds`

Permissions: Devices > VPN > Modify VPN

## GET SecureX Configs

Request Type: **GET**

Description: Retrieves the SecureX configuration associated with the specified ID. If no ID is specified for a GET, retrieves list of all SecureX configurations.

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/securexconfigs`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/integration/securexconfigs/{objectId}`

Permissions: System>SecureX

## PUT SecureX Configs

Request Type: **PUT**

Description: Modifies the SecureX configuration associated with the specified ID

URL: `/api/fmc_config/v1/domain/{domainUUID}/integration/securexconfigs/{objectId}`

Permissions: System>SecureX

# Object Services

## GET AnyConnect Custom Attributes

Request Type: **GET**

Description: Retrieves the AnyConnect Custom Attribute associated with the specified ID. If no ID is specified for a GET, retrieves list of all AnyConnect Custom Attribute objects.

URL for listing: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectcustomattributes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectcustomattributes/{objectId}`

URL to list all overrides:

`/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectcustomattributes/{containerUUID}/override`

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value

## GET AnyConnect Packages

Request Type: **GET**

Description: Retrieves the AnyConnect Package associated with the specified ID. If no ID is specified for a GET, retrieves list of all AnyConnect Package objects..

URL for listing: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectpackages`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectpackages/{objectId}`

Permissions: Object Manager

## GET anyconnectexternalbrowserpackages

Request Type: **GET**

Description: Retrieves the AnyConnect External Browser Package associated with the specified ID. If no ID is specified for a GET, retrieves list of all AnyConnect External Browser Package objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectexternalbrowserpackages`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectexternalbrowserpackages/{objectId}`

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value.



## GET AnyConnect Profiles

Request Type: **GET**

Description: Retrieves the AnyConnect Profile associated with the specified ID. If no ID is specified for a GET, retrieves list of all AnyConnect Profile objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectprofiles`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/anyconnectprofiles/{objectId}`

Permissions: Object Manager

Parameters available for filter: To be used in conjunction with `"unusedOnly:true"` to search for unused objects and `"nameOrValue:{nameOrValue}"` to search for both name and value.

Parameters available for filter: To be used in conjunction with `"unusedOnly:true"` to search for unused objects and `"nameOrValue:{nameOrValue}"` to search for both name and value.

## GET anyprotocolportobjects

Request Type: **GET**

Description: Retrieves the any protocol port object associated with the specified ID. If no ID is specified, retrieves list of all protocol port objects with the protocol set to All.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/anyprotocolportobjects`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/anyprotocolportobjects/{object_UUID}`

Permissions: Object Manager

## GET applicationcategories

Request Type: **GET**

Description: Retrieves the application category object associated with the specified ID. If no ID is specified, retrieves list of all application category objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/applicationcategories`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/applicationcategories/{object_UUID}`

Permissions: Object Manager

## GET applicationfilters

Request Type: **GET**

Description: Retrieves the application filter object associated with the specified ID. If no ID is specified, retrieves list of all application filter objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/applicationfilters`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/applicationfilters/{object_UUID}`

Permissions: Object Manager

## PUT applicationfilters

Request Type: **PUT**

Description: Modifies the application filter object associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/applicationfilters/{objectId}

Permissions: Object Manager > Modify Object Manager > Modify Object Manager

## POST applicationfilters

Request Type: **POST**

Description: Creates or overrides the application filter object with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/applicationfilters

Permissions: Object Manager > Modify Object Manager > Modify Object Manager

## DELETE applicationfilters

Request Type: **DELETE**

Description: Deletes the application filter object associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/applicationfilters/{objectId}

Permissions: Object Manager > Modify Object Manager > Modify Object Manager

## GET applicationproductivities

Request Type: **GET**

Description: Retrieves the application productivity object associated with the specified ID. If no ID is specified, retrieves list of all application productivity objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/applicationproductivities

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/applicationproductivities/{object\_UUID}

Permissions: Object Manager

## GET applicationrisks

Request Type: **GET**

Description: Retrieves the application risk object associated with the specified ID. If no ID is specified, retrieves list of all application risk objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/applicationrisks

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/applicationrisks/{object_UUID}`

Permissions: Object Manager

## GET applications

Request Type: **GET**

Description: Retrieves the application object associated with the specified ID. If no ID is specified, retrieves list of all application objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/applications`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/applications/{object_UUID}`

Permissions: Object Manager

## GET applicationtags

Request Type: **GET**

Description: Retrieves the application tag object associated with the specified ID. If no ID is specified, retrieves list of all application tag objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/applicationtags`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/applicationtags/{object_UUID}`

Permissions: Object Manager

## GET applicationtypes

Request Type: **GET**

Description: Retrieves the application type object associated with the specified ID. If no ID is specified, retrieves list of all application type objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/applicationtypes`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/applicationtypes/{object_UUID}`

Permissions: Object Manager

## GET aspathlists

Request Type: **GET**

Description: Retrieves the autonomous system path list associated with the specified ID. If no ID is specified, retrieves list of all autonomous system paths.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/aspathlists`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/aspathlists/{objectId}`

Permissions: Object Manager

## PUT aspathlists

Request Type: **PUT**

Description: Modifies the AsPath List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/aspathlists/{objectId}`

Permissions: Object Manager > Modify Object Manager

## POST aspathlists

Request Type: **POST**

Description: Creates an AsPath List object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/aspathlists`

Permissions: Object Manager > Modify Object Manager

## DELETE aspathlists

Request Type: **DELETE**

Description: Deletes the AsPath List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/aspathlists/{objectId}`

Permissions: Object Manager > Modify Object Manager

## POST bulkdynamicobjects

Request Type: **POST**

Description: Adds Dynamic Object Mappings for specific Dynamic Objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/bulkdynamicobjects`

Permissions: Devices > VPN > Modify VPN

## GET certenrollments

Request Type: **GET**

Description: Retrieves the PKI enrollments object associated with the specified ID. If no ID is specified for a GET, retrieves list of all PKI enrollment objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/devicegroups/certenrollments`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/devicegroups/certenrollments/{parent_object_UUID}`

Permissions: Devices > Device Management > View Devices

## GET communitylists

Request Type: **GET**

Description: Retrieves the community list associated with the specified ID. If no ID is specified, retrieves all community lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/communitylists`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/communitylists/{objectId}`

Permissions: Object Manager

## GET Certificate Maps

Request Type: **GET**

Description: Retrieves the Certificate Map associated with the specified ID. If no ID is specified for a GET, retrieves list of all Certificate Map objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/certificatemaps`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/certificatemaps/{objectId}`

Permissions: Devices > Certificates

Parameters available for filtering: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value.

## GET continents

Request Type: **GET**

Description: Retrieves the continent object associated with the specified ID. If no ID is specified, retrieves list of all continent objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/continents`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/continents/{object_UUID}`

Permissions: Object Manager

## GET countries

Request Type: **GET**

Description: Retrieves the country object associated with the specified ID. If no ID is specified, retrieves list of all country objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/countries`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/countries/{object_UUID}`

Permissions: Object Manager

## DELETE dnsservergroups

Request Type: **DELETE**

Description: Deletes a DNS server group with the specified object ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/dnsservergroups/{object\_UUID}

Permissions: Devices > Device Management > Modify Devices

## PUT dnsservergroups

Request Type: **PUT**

Description: Modifies a DNS server group with the specified object ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/dnsservergroups

Permissions: Devices > Device Management > Modify Devices

## POST dnsservergroups

Request Type: **POST**

Description: Creates a DNS server group group with the specified object ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/dnsservergroups

Permissions: Devices > Device Management > Modify Devices

## GET dnsservergroups

Request Type: **GET**

Description: Retrieves the DNS server group associated with the specified ID. If no ID is specified, retrieves list of all dns server groups.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/dnsservergroups

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/object/dnsservergroups/{object\_UUID}

Description: Retrieves all(Domain and Device) overrides on a ICMPV4 object. Response will always be in expanded form. If passed, the "expanded" query parameter will be ignored.

URL to list all overrides on a particular object:

/api/fmc\_config/v1/domain/{domainUUID}/object/dnsservergroups/{containerUUID}/overrides/{objectId}

URL for override for an object on a particular domain or device:

/api/fmc\_config/v1/domain/{domainUUID}/object/dnsservergroups/{containerUUID}/overrides

Permissions: Devices > Device Management > View Devices

## POST dynamicobjectmappings

Request Type: **POST**

Description: Adds Dynamic Object Mappings for specific Dynamic Objects

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjectmappings`

Permissions: Object Manager > Modify Object Manager

## DELETE dynamicobjectmappings

Request Type: **DELETE**

Description: Removes Dynamic Object Mappings for specific Dynamic Objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjectmappings`

Parameters available for filtering:

Parameter	Values
Objects with ids:	"ids:id1,id2,..."
Unused objects:	"unusedOnly:true"
Name starts with:	"nameStartsWith:{name-pattern}"
Agent ID:	"agentId:{Agent ID}"

Permissions: Object Manager > Modify Object Manager

## GET dynamicobjects

Request Type: **GET**

Description: Retrieves the Dynamic Object associated with the specified ID. If no ID is specified for a GET, retrieves list of all Dynamic Objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectIdOrName}`

Permissions: Object Manager

Parameters available for filtering: name (Cannot be used if object ID is specified in path.)

## POST dynamicobjects

Request Type: **POST**

Description: Creates or overrides the Dynamic Objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/dynamicobjects`

Permissions: Object Manager > Modify Object Manager

## DELETE dynamicobjects

Request Type: **DELETE**

Description: Deletes the Dynamic Object associated with the specified ID. If used without an ID, deletes objects selected by filtering.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/dynamicobjects/

URL for DELETE by ID:

/api/fmc\_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectIdOrName}

Parameters available for filtering:

Parameter	Values
Objects with ids:	"ids:id1,id2,..."
Unused objects:	"unusedOnly:true"
Name starts with:	"nameStartsWith:{name-pattern}"

Permissions: Object Manager > Modify Object Manager

## PUT dynamicobjects

Request Type: **PUT**

Description: Modifies the Dynamic Object associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectId}

Permissions: Object Manager > Modify Object Manager

## GET mappings

Request Type: **GET**

Description: Retrieves the Dynamic Object Mappings associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectIdOrName}/mappings

Permissions: Object Manager

## PUT mappings

Request Type: **PUT**

Description: Adds Dynamic Object Mappings associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectId}/mappings

Permissions: Object Manager > Modify Object Manager

## DELETE mappings

Request Type: **DELETE**

Description: Removes the Dynamic Object Mappings associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/dynamicobjects/{objectId}/mappings



Parameters available for filtering:

Parameter	Values
Objects with ids:	"ids:id1,id2,..."
Unused objects:	"unusedOnly:true"
Name starts with:	"nameStartsWith:{name-pattern}"
Agent ID:	"agentId:{Agent ID}"

Permissions: Object Manager > Modify Object Manager

## GET endpointdevicetypes

Request Type: **GET**

Description: Retrieves the endpoint device type object associated with the specified ID. If no ID is specified, retrieves list of all endpoint device type objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/endpointdevicetypes

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/endpointdevicetypes/{object\_UUID}

Permissions: Object Manager

## GET expanded community lists

Request Type: **GET**

Description: Retrieves the expanded community list associated with the specified ID. If no ID is specified, retrieves all community lists.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/expandedcommunitylists

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/object/expandedcommunitylists/{objectId}

Permissions: Object Manager

## PUT expandedcommunitylists

Request Type: **PUT**

Description: Modifies the specified expanded community list.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/expandedcommunitylists/{objectId}

Permissions: Object Manager > Modify Object Manager

## POST expandedcommunitylists

Request Type: **POST**

Description: Creates an expanded community lists.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/expandedcommunitylists

Permissions: Object Manager > Modify Object Manager

## DELETE expandedcommunitylists

Request Type: **DELETE**

Description: Deletes the specified expanded community lists.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/expandedcommunitylists/{objectId}

Permissions: Object Manager > Modify Object Manager

## GET extended access lists

Request Type: **GET**

Description: Retrieves extended access list associated with the specified ID. If no ID is specified, retrieves list of all extended access lists.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/extendedaccesslists

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/extendedaccesslists/{object\_UUID}

Permissions: Devices > Device Management > View Devices

## PUT extendedaccesslists

Request Type: **PUT**

Description: Modifies the extended access list associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/extendedaccesslists/{objectId}

Permissions: Object Manager > Modify Object Manager

## POST extendedaccesslists

Request Type: **POST**

Description: Creates an extended access lists.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/extendedaccesslists

Permissions: Object Manager > Modify Object Manager

## DELETE extendedaccesslists

Request Type: **DELETE**

Description: Deletes the extended access list associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/extendedaccesslists/{objectId}

Permissions: Object Manager > Modify Object Manager

## GET extendedcommunitylists

Request Type: **GET**

Description: Retrieves the extended community list associated with the specified ID. If no ID is specified, retrieves list of all extended community lists.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/extendedcommunitylists

URL for GET by ID:

/api/fmc\_config/v1/domain/{domainUUID}/object/extendedcommunitylists/{objectId}

URL for GET overrides:

/api/fmc\_config/v1/domain/{domainUUID}/object/extendedcommunitylists/{containerUUID}/overrides

URL for GET overrides by ID:

/api/fmc\_config/v1/domain/{domainUUID}/object/extendedcommunitylists/{containerUUID}/overrides/{objectId}

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value and "type:{type}" to search for specific type of the object. For ExtendedCommunityLists supported types are Standard and Expanded.

## PUT extendedcommunitylists

Request Type: **PUT**

Description: Modifies the extended community list with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/extendedcommunitylists/{objectId}

Permissions: Object Manager > Modify Object Manager

## POST extendedcommunitylists

Request Type: **POST**

Description: Creates an extended community list.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/extendedcommunitylists

Permissions: Object Manager > Modify Object Manager

## DELETE extendedcommunitylists

Request Type: **DELETE**

Description: Deletes extended community list with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/extendedcommunitylists/{objectId}

Permissions: Object Manager > Modify Object Manager

## DELETE fqdns

Request Type: **DELETE**

Description: Deletes the FQDN object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT fqdns

Request Type: **PUT**

Description: Modifies the FQDN object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST fqdns

Request Type: **POST**

Description: Creates or overrides the FQDN objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns?bulk=true`

Permissions: Object Manager > Modify Object Manager

## GET fqdns

Request Type: **GET**

Description: Retrieves the FQDN object associated with the specified ID. If no ID is specified for a GET, retrieves list of all FQDN objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{fqdn_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/fqdns/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

## GET geolocation

Request Type: **GET**

Description: Retrieves the geolocation object associated with the specified ID. If no ID is specified, retrieves list of all geolocation objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/geolocations`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/geolocations/{object_UUID}`

Permissions: Object Manager

## PUT geolocations

Request Type: **PUT**

Description: Modifies the geolocation object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/geolocations/{objectId}`

Permissions: Object Manager > Modify Object Manager

## POST geolocations

Request Type: **POST**

Description: Creates or overrides the Geolocation objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/geolocations`

Permissions: Object Manager > Modify Object Manager

## DELETE geolocations

Request Type: **DELETE**

Description: Deletes the geolocation object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/geolocations/{objectId}`

Permissions: Object Manager > Modify Object Manager

## GET global time zones

Request Type: **GET**

Description: Retrieves the global time zone object associated with the specified ID. If no ID is specified, retrieves list of all global time zone objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/globaltimezones`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/globaltimezones/{objectId}`

Permissions: Object Manager

## GET groupolicies

Request Type: **GET**

Description: Retrieves the VPN group policies associated with the specified ID. If no ID is specified for a GET, retrieves list of all VPN group policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/groupolicies`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/groupolicies/{objectId}`

Permissions: Devices > VPN

## DELETE hosts

Request Type: **DELETE**

Description: Deletes the specified host object.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT hosts

Request Type: **PUT**

Description: Modifies a host object.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST hosts

Request Type: **POST**

Description: Creates or overrides the host objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts?bulk=true`

Permissions: Object Manager > Modify Object Manager

## GET hosts

Request Type: **GET**

Description: Retrieves the host object associated with the specified ID. If no ID is specified, retrieves list of all host objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/hosts?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{host_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/hosts/{host_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

## GET hostscanpackages

Request Type: **GET**

Description: Retrieves HostScan packages. If no ID is specified for a GET, retrieves list of all HostScan packages.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/hostscanpackages`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/hostscanpackages/{objectId}`

Permissions: Devices

## DELETE icmpv4objects

Request Type: **DELETE**

Description: Deletes the specified ICMPv4 port.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv4objects/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv4objects/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT icmpv4objects

Request Type: **PUT**

Description: Modifies ICMPv4 port objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv4objects/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv4objects/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST icmpv4objects

Request Type: **POST**

Description: Creates or overrides the ICMPv4 port objects with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv4objects

URL for Bulk Post : /api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv4objects?bulk=true

Permissions: Object Manager > Modify Object Manager

## GET icmpv4objects

Request Type: **GET**

Description: Retrieves the ICMPv4 object associated with the specified ID. If no ID, retrieves list of all ICMPv4 objects.

URL for listing: /api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv4objects

URL for all the overrides on a particular domain or device:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/icmp4objects?overrideTargetId={target\_UUID}

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv4objects/{object\_UUID}

URL to list all overrides on a particular object:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/icmp4objects/{icmpv4object\_UUID}/overrides

URL for override for an object on a particular domain or device:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/icmp4objects/{icmp4object\_UUID}?overrideTargetId={target\_UUID}

Permissions: Object Manager

## DELETE icmpv6objects

Request Type: **DELETE**

Description: Deletes the specified ICMPv6 port objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv6objects/{object\_UUID}

URL to DELETE overrides on a particular object:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv6objects/{object\_UUID}?overrideTargetId={target\_UUID}

Permissions: Object Manager > Modify Object Manager

## PUT icmpv6objects

Request Type: **PUT**

Description: Modifies ICMPv6 port objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv6objects/{object\_UUID}

URL to edit or update an override on a particular object:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/icmpv6objects/{parent\_object\_UUID}

Permissions: Object Manager > Modify Object Manager



## POST icmpv6objects

Request Type: **POST**

Description: Creates or overrides the ICMPv6 port objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects?bulk=true`

Permissions: Object Manager > Modify Object Manager

## GET icmpv6objects

Request Type: **GET**

Description: Retrieves the ICMPv6 object associated with the specified ID. If no ID is specified, retrieves list of all ICMPv6 objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects/{icmpv6object_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/icmpv6objects/{icmpv6object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

## DELETE ikev1ipsecproposals

Request Type: **DELETE**

Description: Deletes the IKEv1 IPsec Proposal associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ikev1ipsecproposals/{ikev1ipsecproposal_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT ikev1ipsecproposals

Request Type: **PUT**

Description: Modifies the IKEv1 IPsec Proposal associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ikev1ipsecproposals/{ikev1ipsecproposal_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST ikev1ipsecproposals

Request Type: **POST**

Description: Creates the IKEv1 IPsec Proposal associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/ikev1ipsecproposals

Permissions: Object Manager > Modify Object Manager

## GET ikev1ipsecproposals

Request Type: **GET**

Description: Retrieves the IKEv1 IPsec Proposal associated with the specified ID. If no ID is specified for a GET, retrieves list of all IKEv1 IPsec Proposal objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ikev1ipsecproposals

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/object/ikev1ipsecproposals/{ikev1ipsecproposal\_UUID}

Permissions: Object Manager

## DELETE ikev1policies

Request Type: **DELETE**

Description: Deletes the IKEv1 policy object associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/ikev1policies/{ikev1policy\_UUID}

Permissions: Object Manager > Modify Object Manager

## PUT ikev1policies

Request Type: **PUT**

Description: Modifies the IKEv1 policy object associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/ikev1policies/{ikev1policy\_UUID}

Permissions: Object Manager > Modify Object Manager

## POST ikev1policies

Request Type: **POST**

Description: Creates the IKEv1 policy object associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/ikev1policies

Permissions: Object Manager > Modify Object Manager

## GET ikev1policies

Request Type: **GET**

Description: Retrieves the IKEv1 policy object associated with the specified ID. If no ID is specified for a GET, retrieves list of all IKEv1 policy objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ikev1policies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ikev1policies/{ikev1policy_UUID}`

Permissions: Object Manager

## DELETE ikev2ipsecproposals

Request Type: **DELETE**

Description: Deletes the IKEv2 IPsec Proposal associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ikev2ipsecproposals/{ikev2ipsecproposal_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT ikev2ipsecproposals

Request Type: **PUT**

Description: Modifies the IKEv2 IPsec Proposal associated with the specified ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ikev2ipsecproposals/{ikev2ipsecproposal_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST ikev2ipsecproposals

Request Type: **POST**

Description: Creates the IKEv2 IPsec Proposal associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ikev2ipsecproposals`

Permissions: Object Manager > Modify Object Manager

## GET ikev2ipsecproposals

Request Type: **GET**

Description: Retrieves the IKEv2 IPsec Proposal associated with the specified ID. If no ID is specified for a GET, retrieves list of all IKEv2 IPsec Proposal objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ikev2ipsecproposals`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ikev2ipsecproposals/{ikev2ipsecproposal_UUID}`

Permissions: Object Manager

## DELETE ikev2policies

Request Type: **DELETE**

Description: Deletes the IKEv2 object associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/ikev2policies/{ikev2policy\_UUID}

Permissions: Object Manager > Modify Object Manager

## PUT ikev2policies

Request Type: **PUT**

Description: Modifies the IKEv2 object associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/ikev2policies/{ikev2policy\_UUID}

Permissions: Object Manager > Modify Object Manager

## POST ikev2policies

Request Type: **POST**

Description: Creates the IKEv2 object associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/ikev2policies

Permissions: Object Manager > Modify Object Manager

## GET ikev2policies

Request Type: **GET**

Description: Retrieves the IKEv2 object associated with the specified ID. If no ID is specified for a GET, retrieves list of all IKEv2 IPsec Proposal objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ikev2policies

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/ikev2policies/{ikev2policy\_UUID}

Permissions: Object Manager

## DELETE interfacegroups

Request Type: **DELETE**

Description: Deletes the Interface group objects associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/interfacegroups/{object\_UUID}

URL on a particular object:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/interfacegroups/{object\_UUID}?overrideTargetId={target\_UUID}

Permissions: Object Manager > Modify Object Manager

## PUT interfacegroups

Request Type: **PUT**

Description: Modifies the Interface group objects associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST interfacegroups

Request Type: **POST**

Description: Creates or overrides the Interface group objects associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups?bulk=true`

Permissions: Object Manager > Modify Object Manager

## GET interfacegroups

Request Type: **GET**

Description: Retrieves the Interface group objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all interface group objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{interfacegroups_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfacegroups/{interfacegroups_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

## GET interfaceobjects

Request Type: **GET**

Description: Retrieves list of all the interface objects both security zones and interface groups.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/interfaceobjects`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfaceobjects?overrideTargetId={target_UUID}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfaceobjects/{object_UUID}`

URL to list all overrides on a particular object::

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfaceobjects/{interfaceobjects_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/interfaceobjects/{interfaceobjects_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

## GET intrusionrulegroups

Request Type: **GET**

Description: Retrieves the Snort3 Intrusion rule group. If no ID is specified, retrieves a list of all Snort3 Intrusion rule groups.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/intrusionrulegroups`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/intrusionrulegroups/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy

Parameters available for filtering: Value is of format (including quotes): filter=name:Browser OR filter=name:Browser/Firefox OR filter=showonlyparents:true OR filter=showonlyparents:false OR filter=issystemdefined:true OR issystemdefined:false.

## PUT intrusionrulegroups

Request Type: **PUT**

Description: Modifies the Snort3 Intrusion rule group with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/intrusionrulegroups/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## POST Intrusion Rule Groups

Request Type: **POST**

Description: Creates or overrides the Snort3 Intrusion rule group with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/intrusionrulegroups`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## DELETE Intrusion Rule Groups

Request Type: **DELETE**

Description: Deletes the specified Snort3 intrusion rule group.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/intrusionrulegroups/{objectId}

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## GET intrusionrules

Request Type: **GET**

Description: Retrieves the Snort3 Intrusion rule group. If no ID is specified, retrieves a list of all Snort3 Intrusion rule groups.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/intrusionrules

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/object/intrusionrules/{objectId}

Permissions: Policies > Access Control > Intrusion Policy

Parameters available for filtering: Value is of format (including quotes): filter=gid:123 OR filter=sid:123 OR filter=gid:123;sid:456 OR filter=overrides:true OR filter=overrides:true;ipspolicy:UUID1,UUID2,UUID3 OR filter=fts:123. ipspolicy is comma separated Snort3 Intrusion Policy UUID.

## PUT intrusionrules

Request Type: **PUT**

Description: Creates or modifies the Snort3 rule with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/intrusionrules

URL for PUT by ID: /api/fmc\_config/v1/domain/{domainUUID}/object/intrusionrules/{objectId}

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## POST intrusionrules

Request Type: **POST**

Description: Creates or overrides the Snort3 rules with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/intrusionrules

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## DELETE intrusionrules

Request Type: **DELETE**

Description: Deletes the specified Snort3 rule.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/intrusionrules/{objectId}

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## GET ipv4addresspools

Request Type: **GET**

Description: Retrieves the IPv4 Address Pool object associated with the specified ID. If no ID is specified for a GET, retrieves list of all IPv4 Address Pool objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv4addresspools`

URL for overrides:

`/api/fmc_config/v1/domain/{domainUUID}/object/ipv4addresspools/{containerUUID}/overrides`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv4addresspools/{objectId}`

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value.

## GET ipv6addresspools

Request Type: **GET**

Description: Retrieves the IPv6 Address Pool object associated with the specified ID. If no ID is specified for a GET, retrieves list of all IPv6 Address Pool objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv6addresspools`

URL for overrides:

`/api/fmc_config/v1/domain/{domainUUID}/object/ipv6addresspools/{containerUUID}/overrides`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv6addresspools/{objectId}`

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value.

## GET ipv4prefixlists

Request Type: **GET**

Description: Retrieves the IPv4 prefix list associated with the specified ID. If no ID is specified, retrieves all IPv4 prefix lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv4prefixlists`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv4prefixlists/{objectId}`

Permissions: Object Manager

## PUT ipv4prefixlists

Request Type: **PUT**

Description: Modifies the IPv4 Prefix List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv4prefixlists/{objectId}`

Permissions: Object Manager > Modify Object Manager



## POST ipv4prefixlists

Request Type: **POST**

Description: Creates an IPv4 Prefix List.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/ipv4prefixlists

Permissions: Object Manager > Modify Object Manager

## DELETE ipv4prefixlists

Request Type: **DELETE**

Description: Deletes the IPv4 Prefix List associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/ipv4prefixlists/{objectId}

Permissions: Object Manager > Modify Object Manager

## GET ipv6prefixlists

Request Type: **GET**

Description: Retrieves the IPv6 prefix list associated with the specified ID. If no ID is specified, retrieves all IPv6 prefix lists.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/ipv6prefixlists

URL for GET by ID: /api/fmc\_config/v1/domain/{domainUUID}/object/ipv6prefixlists/{objectId}

Permissions: Object Manager

## PUT ipv6prefixlists

Request Type: **PUT**

Description: Modifies the IPv6 Prefix List associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/ipv6prefixlists/{objectId}

Permissions: Object Manager > Modify Object Manager

## POST ipv6prefixlists

Request Type: **POST**

Description: Creates an IPv6 Prefix List.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/ipv6prefixlists

Permissions: Object Manager > Modify Object Manager

## DELETE ipv6prefixlists

Request Type: **DELETE**

Description: Deletes the IPv6 Prefix List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ipv6prefixlists/{objectId}`

Permissions: Object Manager > Modify Object Manager

## GET isesecuritygrouptags

Request Type: **GET**

Description: Retrieves the ISE security group tag object with the specified ID. If no ID is specified, retrieves list of all ISE security group tag objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/isesecuritygrouptags`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/isesecuritygrouptags/{object_UUID}`

Permissions: Object Manager

## GET keychain

Request Type: **GET**

Description: Retrieves the keychain object associated with the specified ID. If no ID is specified for a GET, retrieves list of all keychain objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/keychains`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychain_UUID}`

URL to list all overrides on a particular object. If the object ID is not specified, displays all keychain objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychains_UUID}/overrides/{objectId}`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/keychains?overrideTargetId={target_UUID}`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychain_UUID}?overrideTargetId={target_UUID}`




---

**Note** The target UUID could be that of a domain or a device.

---

Permissions: Object Manager

## DELETE keychain

Request Type: **DELETE**

Description: Deletes the keychain object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychain_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychain_UUID}?overrideTargetId={target_UUID}`



---

**Note** The target UUID could be that of a domain or a device.

---

Permissions: Object Manager > Modify Object Manager

## PUT keychain

Request Type: **PUT**

Description: Modifies the keychain object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychain_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/keychains/{keychain_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST keychain

Request Type: **POST**

Description: Creates or overrides the keychain objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/keychains`

URL for Bulk Post:

`/api/fmc_config/v1/domain/{domain_UUID}/object/keychains?bulk=true`

URL to create an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/keychains`



---

**Attention** If override was not set when creating the key chain object:

1. Using PUT, update the override property of the key chain object to "true".
2. Create the POST override for the key chain object.

---

Permissions: Object Manager > Modify Object Manager

## GET localrealmusers

Request Type: **GET**

Description: Retrieves the local realm user object associated with the specified ID. If no ID is specified, retrieves list of all local realm user objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/localrealmusers`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/localrealmusers/{objectId}`

Permissions: System > Integration > Realms

Parameters available for filtering: To filter users by realm, use `realm: {realmUUID}`. To filter users by name, use `name: {name}`

## PUT localrealmusers

Request Type: **PUT**

Description: Modifies the local realm user object with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/localrealmusers/{objectId}`

Permissions: System > Integration > Realms > Modify Realms

## POST localrealmusers

Request Type: **POST**

Description: Creates or overrides the local realm user objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/localrealmusers`

Permissions: System > Integration > Realms > Modify Realms

## DELETE localrealmusers

Request Type: **DELETE**

Description: Deletes the specified local realm user object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/localrealmusers/{objectId}`

Permissions: Object Manager > Modify Object Manager

## GET networkaddresses

Request Type: **GET**

Description: Retrieves list of all network and host objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkaddresses`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkaddresses?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkaddresses?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager

## DELETE networkgroups

Request Type: **DELETE**

Description: Deletes the specified Network Group.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT networkgroups

Request Type: **PUT**

Description: Modifies a Network Group.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST networkgroups

Request Type: **POST**

Description: Creates or overrides the network group with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups?bulk=true`

Permissions: Object Manager > Modify Object Manager

## GET networkgroups

Request Type: **GET**

Description: Retrieves the network group object associated with the specified ID. If no ID is specified, retrieves list of all network group objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{networkgroups_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networkgroups/{networkgroups_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

## DELETE networks

Request Type: **DELETE**

Description: Deletes the specified network objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT networks

Request Type: **PUT**

Description: Modifies network objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST networks

Request Type: **POST**

Description: Creates or overrides the network objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks?bulk=true`

Permissions: Object Manager > Modify Object Manager

## GET networks

Request Type: **GET**

Description: Retrieves the network objects associated with the specified ID. If no ID is specified, retrieves list of all network objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networks?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{network_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/networks/{network_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

## GET packettracerpcaplist

Request Type: **GET**

Description: Retrieves all the PCAP files in the most recently uploaded fashion.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/packettracerpcaplist`

Permissions: Devices > Troubleshoot > Packet Capture

## POST packettracerpcapupload

Request Type: **POST**

Description: Imports a PCAP file from Packet Tracer.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/packettracerpcapupload`

Permissions: Devices > Troubleshoot > Packet Capture > Modify Packet Capture

## GET policy lists

Request Type: **GET**

Description: Retrieves the policy list associated with the specified ID. If no ID is specified, retrieves all policy lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/policylists`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/policylists/{objectId}`

Permissions: Object Manager

## PUT policylists

Request Type: **PUT**

Description: Modifies the Policy List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/policylists/{objectId}`

Permissions: Object Manager > Modify Objects

## POST policylists

Request Type: **POST**

Description: Creates a Policy List.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/policylists`

Permissions: Object Manager > Modify Objects

## DELETE policylists

Request Type: **DELETE**

Description: Deletes the Policy List associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/policylists/{objectId}

Permissions: Object Manager > Modify Objects

## DELETE portobjectgroups

Request Type: **DELETE**

Description: Deletes the specified port object groups.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/portobjectgroups/{object\_UUID}

URL to DELETE overrides on a particular object:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/portobjectgroups/{object\_UUID}?overrideTargetId={target\_UUID}

Permissions: Object Manager > Modify Object Manager

## PUT portobjectgroups

Request Type: **PUT**

Description: Modifies port object groups.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/portobjectgroups/{object\_UUID}

URL to edit or update an override on a particular object:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/portobjectgroups/{parent\_object\_UUID}

Permissions: Object Manager > Modify Object Manager

## POST portobjectgroups

Request Type: **POST**

Description: Creates or overrides the port object groups with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/portobjectgroups

URL for Bulk Post: /api/fmc\_config/v1/domain/{domain\_UUID}/object/portobjectgroups?bulk=true

Permissions: Object Manager > Modify Object Manager

## GET portobjectgroups

Request Type: **GET**

Description: Retrieves the port object group object associated with the specified ID. If no ID is specified, retrieves list of all port object group objects.

URL for listing: /api/fmc\_config/v1/domain/{domain\_UUID}/object/portobjectgroups

URL for all the overrides on a particular domain or device:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/portobjectgroups?overrideTargetId={target\_UUID}

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/portobjectgroups/{object\_UUID}



URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups/{portobjectgroup_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups/{portobjectgroup_UUID}?overrideTargetId={target_UUID}`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/portobjectgroups?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager

## GET ports

Request Type: **GET**

Description: Retrieves list of all port objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ports`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ports?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ports?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager

## DELETE protocolportobjects

Request Type: **DELETE**

Description: Deletes the specified protocol port objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT protocolportobjects

Request Type: **PUT**

Description: Modifies protocol port objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST protocolportobjects

Request Type: **POST**

Description: Creates or overrides the protocol port objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects?bulk=true`

Permissions: Object Manager > Modify Object Manager

## GET protocolportobjects

Request Type: **GET**

Description: Retrieves the protocol port object associated with the specified ID. If no ID is specified, retrieves list of all protocol port objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects?overrideTargetId={target_UUID}`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{object_UUID}`

URL to list all overrides on a particular object::

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{protocolportobject_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/protocolportobjects/{protocolportobject_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

## GET radiusservergroups

Request Type: **GET**

Description: Retrieves the Radius Server Group associated with the specified ID. If no ID is specified for a GET, retrieves list of all Radius Server Group objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/radiusservergroups`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/radiusservergroups/{objectId}`

Permissions: Object Manager

Parameters available for filtering: To be used in conjunction with "unusedOnly:true" to search for unused objects and "nameOrValue:{nameOrValue}" to search for both name and value.

## DELETE ranges

Request Type: **DELETE**

Description: Deletes the specified address range.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT ranges

Request Type: **PUT**

Description: Modifies an address range.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST ranges

Request Type: **POST**

Description: Creates or overrides an address range with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges?bulk=true`

Permissions: Object Manager > Modify Object Manager

## GET ranges

Request Type: **GET**

Description: Retrieves the address range object associated with the specified ID. If no ID is specified, retrieves list of all address range objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ranges?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{range_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/ranges/{range_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager

## GET realms

Request Type: **GET**

Description: Retrieves the realm object associated with the specified ID. If no ID is specified, retrieves list of all realm objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/realms`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/realms/{object_UUID}`

Permissions: System > Integration > Realms

## PUT realms

Request Type: **PUT**

Description: Modifies the realm object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/realms/{objectId}`

Permissions: System > Integration > Realms > Modify Realms

## POST realms

Request Type: **POST**

Description: Creates or overrides the realm objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/realms`

Permissions: System > Integration > Realms > Modify Realms

## DELETE realms

Request Type: **DELETE**

Description: Deletes the specified realm object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/realms/{objectId}`

Permissions: System > Integration > Realms > Modify Realms

## GET realmusergroups

Request Type: **GET**

Description: Retrieves the realm user group object associated with the specified ID. If no ID is specified, retrieves list of all realm user group objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/realmusergroups`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/realmusergroups/{object_UUID}`

Permissions: Object Manager

Parameters available for filtering: realmUuid




---

**Note** This is a required parameter.

---

## GET realmusers

Request Type: **GET**

Description: Retrieves the realm user object associated with the specified ID. If no ID is specified, retrieves list of all realm user objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/realmusers`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/realmusers/{object_UUID}`

Permissions: Object Manager

Parameters available for filtering: realmUuid



---

**Note** This is a required parameter.

---

## GET route maps

Request Type: **GET**

Description: Retrieves the route map associated with the specified ID. If no ID is specified, retrieves list of all route maps.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/routemaps`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/routemaps/{objectId}`

Permissions: Object Manager

## PUT routemaps

Request Type: **PUT**

Description: Modifies the RouteMap with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/routemaps/{objectId}`

Permissions: Object Manager > Modify Objects

## POST routemaps

Request Type: **POST**

Description: Creates a RouteMap.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/routemaps`

Permissions: Object Manager > Modify Objects

## DELETE routemaps

Request Type: **DELETE**

Description: Deletes the RouteMap with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/object/routemaps/{objectId}

Permissions: Object Manager > Modify Objects

## GET securitygrouptags

Request Type: **GET**

Description: Retrieves the custom security group tag object associated with the specified ID. If no ID is specified, retrieves list of all custom security group tag objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/securitygrouptags

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/object/securitygrouptags/{object\_UUID}

Permissions: Object Manager

Parameters available for filtering: name

## DELETE securityzones

Request Type: **DELETE**

Description: Deletes the specified securityzone objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/securityzones/{object\_UUID}

Permissions: Object Manager>Modify Object Manager

## PUT securityzones

Request Type: **PUT**

Description: Modifies a securityzone object.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/securityzones/{object\_UUID}

Permissions: Object Manager>Modify Object Manager

## POST securityzones

Request Type: **POST**

Description: Creates or overrides the securityzone objects with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/object/securityzones

URL for Bulk Post: /api/fmc\_config/v1/domain/{domain\_UUID}/object/securityzones?bulk=true

Permissions: Object Manager > Modify Object Manager

## GET securityzones

Request Type: **GET**

Description: Retrieves the security zone objects associated with the specified ID. If no ID is specified, retrieves list of all security zone objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/securityzones`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/securityzones/{object_UUID}`

Permissions: Object Manager

Parameters available for filtering: name

## GET SI DNS Feeds

Request Type: **GET**

Description: Retrieves the Security Intelligence DNS feed objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all Security Intelligence DNS feed objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/sidnsfeeds`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/sidnsfeeds/{objectId}`

Permissions: Object Manager

## GET SI DNS Lists

Request Type: **GET**

Description: Retrieves the Security Intelligence DNS list objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all Security Intelligence DNS list objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/sidnslists`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/sidnslists/{objectId}`

Permissions: Object Manager

## GET sinetworkfeeds

Request Type: **GET**

Description: Retrieves the Security Intelligence Network Feed objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all Security Intelligence Network Feed objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/sinetworkfeeds`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/sinetworkfeeds/{objectId}`

Permissions: Object Manager

## GET SI Network Lists

Request Type: **GET**

Description: Retrieves the Security Intelligence network list objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all Security Intelligence network list objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/sinetworklists`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/sinetworklists/{objectId}`

Permissions: Object Manager

## GET Sinkholes

Request Type: **GET**

Description: Retrieves the Sinkhole objects associated with the specified ID. If no ID is specified for a GET, retrieves list of all Sinkhole objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/sinkholes`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/sinkholes/{objectId}`

Permissions: Object Manager

## GET siurlfeeds

Request Type: **GET**

Description: Retrieves the Security Intelligence url feed object associated with the specified ID. If no ID is specified, retrieves list of all Security Intelligence url feed objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/siurlfeeds`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/siurlfeeds/{object_UUID}`

Permissions: Object Manager

## GET siurllists

Request Type: **GET**

Description: Retrieves the Security Intelligence url list object associated with the specified ID. If no ID is specified, retrieves list of all Security Intelligence url list objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/siurllists`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/siurllists/{object_UUID}`

Permissions: Object Manager

## DELETE slamonitors

Request Type: **DELETE**

Description: Deletes the sla monitor object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/slamonitors/{object_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT slamonitors

Request Type: **PUT**



Description: Modifies the sla monitor object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/slamonitors/{object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST slamonitors

Request Type: **POST**

Description: Creates or overrides a SLA monitor with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/slamonitors`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/slamonitors?bulk=true`

Permissions: Object Manager > Modify Object Manager

## GET slamonitors

Request Type: **GET**

Description: Retrieves the SLA Monitors associated with the specified ID. If no ID is specified, retrieves list of all SLA Monitors.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/slamonitors`

URL by GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/slamonitors/{object_UUID}`

Permissions: Object Manager

## GET SSO Servers

Request Type: **GET**

Description: Retrieves the SSO Server Policy Object associated with the specified ID. If no ID is specified, retrieves list of all SSO Server Policy Objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/ssoservers`

URL for all overrides:

`/api/fmc_config/v1/domain/{domainUUID}/object/ssoservers/{containerUUID}/overrides`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/ssoservers/{objectId}`

Permissions: System > User Management > Single Sign-On (SSO)

Parameters available for filtering: To be used in conjunction with `"unusedOnly:true"` to search for unused objects and `"nameOrValue:{nameOrValue}"` to search for both name and value

## GET standard access lists

Request Type: **GET**

Description: Retrieves the standard community list associated with the specified ID. If no ID is specified, retrieves all standard community lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardaccesslists`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/standardaccesslists/{objectId}`

Permissions: Object Manager

## PUT standardaccesslists

Request Type: **PUT**

Description: Modifies the Standard Access List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardaccesslists/{objectId}`

Permissions: Object Manager > Modify Objects

## POST standardaccesslists

Request Type: **POST**

Description: Creates a Standard Access List.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardaccesslists`

Permissions: Object Manager > Modify Objects

## DELETE standardaccesslists

Request Type: **DELETE**

Description: Deletes the Standard Access List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardaccesslists/{objectId}`

Permissions: Object Manager > Modify Objects

## GET standard community lists

Request Type: **GET**

Description: Retrieves the standard community list associated with the specified ID. If no ID is specified, retrieves all standard community lists.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardcommunitylists`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/object/standardcommunitylists/{objectId}`

Permissions: Object Manager

## PUT standardcommunitylists

Request Type: **PUT**

Description: Modifies the Standard Community List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardcommunitylists/{objectId}`

Permissions: Object Manager > Modify Objects

## POST standardcommunitylists

Request Type: **POST**

Description: Creates a Standard Community List.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardcommunitylists`

Permissions: Object Manager > Modify Objects

## DELETE standardcommunitylists

Request Type: **DELETE**

Description: Deletes the Standard Community List associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/standardcommunitylists/{objectId}`

Permissions: Object Manager > Modify Objects

## GET time ranges

Request Type: **GET**

Description: Retrieves the time range object associated with the specified ID. If no ID is specified, retrieves list of all time range objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timeranges`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/timeranges/{objectId}`

Permissions: Object Manager

## PUT time ranges

Request Type: **PUT**

Description: Modifies a time range object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timeranges/{objectId}`

Permissions: Object Manager

## POST time ranges

Request Type: **POST**

Description: Creates or overrides a time range object with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timeranges`

Permissions: Object Manager > Modify Object Manager

## DELETE time ranges

Request Type: **DELETE**

Description: Deletes the time range object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timeranges/{objectId}`

Permissions: Object Manager > Modify Object Manager

## GET time zone objects

Request Type: **GET**

Description: Retrieves the time zone object associated with the specified ID. If no ID is specified, retrieves list of all time zone objects.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects/{objectId}`

URL to list all overrides:

`/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects/{containerUUID}/overrides`

Permissions: Object Manager

## PUT time zone objects

Request Type: **PUT**

Description: Modifies a time zone object.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects/{objectId}`

Permissions: Object Manager

## POST time zone objects

Request Type: **POST**

Description: Creates or overrides a time zone object with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects`

Permissions: Object Manager > Modify Object Manager

## DELETE time zone objects

Request Type: **DELETE**

Description: Deletes the time zone object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/timezoneobjects/{objectId}`

Permissions: Object Manager > Modify Object Manager

## DELETE tunneltags

Request Type: **DELETE**

Description: Deletes the tunnel tag object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/tunneltags/{object_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT tunneltags

Request Type: **PUT**

Description: Modifies the tunnel tag object associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/tunneltags/{object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST tunneltags

Request Type: **POST**

Description: Creates or overrides a tunnel tag with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/tunneltags`

Permissions: Object Manager > Modify Object Manager

## GET tunneltags

Request Type: **GET**

Description: Retrieves the tunnel tag object associated with the specified ID. If no ID is specified, retrieves list of all tunnel tag objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/tunneltags`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/tunneltags/{object_UUID}`

Permissions: Object Manager

## GET urlcategories

Request Type: **GET**

Description: Retrieves the url category object associated with the specified ID. If no ID is specified, retrieves list of all url category objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/urlcategories`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/urlcategories/{object_UUID}`

Permissions: Object Manager

## DELETE urlgroups

Request Type: **DELETE**

Description: Deletes the specified urlgroup objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT urlgroups

Request Type: **PUT**

Description: Modifies urlgroup objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST urlgroups

Request Type: **POST**

Description: Creates or overrides the urlgroup objects with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups`

URL for Bulk Post : `/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups?bulk=true`

Permissions: Object Manager > Modify Object Manager

## GET urlgroups

Request Type: **GET**

Description: Retrieves the url group objects associated with the specified ID. If no ID is specified, retrieves list of all url group objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{urlgroup_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urlgroups/{urlgroup_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## DELETE urls

Request Type: **GET**

Description: Deletes the specified URL.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT urls

Request Type: **PUT**

Description: Modifies a URL.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{parent_object_UUID}`

Permissions: Object Manager

## POST urls

Request Type: **POST**

Description: Creates or overrides the URLs with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/urls`

URL for Bulk Post: `/api/fmc_config/v1/domain/{domain_UUID}/object/urls?bulk=true`

Permissions: Object Manager > Modify Object Manager

## GET urls

Request Type: **GET**

Description: Retrieves the url objects associated with the specified ID. If no ID is specified, retrieves list of all url objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/urls`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{url_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls/{url_UUID}?overrideTargetId={target_UUID}`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/urls?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager

## GET Usage

Request Type: **GET**

Description:

Find usage of specified object uuid and type across objects and policies. Supported object types:

Type	Value
Network	NetworkAddress, Host, Network, Range, FQDN, NetworkGroup
Port	Port, ProtocolPortObject, PortObjectGroup, ICMPV4Object, ICMPV6Object, AnyProtocolPortObject
VLAN tag	VlanTag, VlanGroupTag
URL	Url, UrlGroup

URL: `/api/fmc_config/v1/domain/{domainUUID}/object/operational/usage`

Parameters available for filtering: Specify uuid "uuid:object-uuid" and "type:object-type" and type of object.

Permissions: Object Manager

## GET variablesets

Request Type: **GET**

Description: Retrieves the variable set object associated with the specified ID. If no ID is specified, retrieves list of all variable set objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/variablesets`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/variablesets/{object_UUID}`

Permissions: Object Manager

## DELETE vlangrouptags

Request Type: **DELETE**

Description: Deletes the specified vlangrouptag objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT vlangrouptags

Request Type: **PUT**

Description: Modifies vlangrouptag objects.



URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST vlangrouptags

Request Type: **POST**

Description: Creates or overrides the VLAN group tags with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags`

URL for Bulk Post : `/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags?bulk=true`

Permissions: Object Manager > Modify Object Managers

## GET vlangrouptags

Request Type: **GET**

Description: Retrieves the vlan group tag objects associated with the specified ID. If no ID is specified, retrieves list of all vlan group tag objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{vlangrouptag_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags/{vlangrouptag_UUID}?overrideTargetId={target_UUID}`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlangrouptags?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager > Modify Object Manager

## DELETE vlantags

Request Type: **DELETE**

Description: Deletes the specified VLAN tag objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{object_UUID}`

URL to DELETE overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{object_UUID}?overrideTargetId={target_UUID}`

Permissions: Object Manager > Modify Object Manager

## PUT vlantags

Request Type: **PUT**

Description: Modifies VLAN tag objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{object_UUID}`

URL to edit or update an override on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{parent_object_UUID}`

Permissions: Object Manager > Modify Object Manager

## POST vlantags

Request Type: **POST**

Description: Creates or overrides the VLAN tags with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags`

URL for Bulk Post : `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags?bulk=true`

Permissions: Object Manager > Modify Object Manager

## GET vlantags

Request Type: **GET**

Description: Retrieves the vlantag objects associated with the specified ID. If no ID is specified, retrieves list of all vlantag objects.

URL for listing: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags`

URL for all the overrides on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags?overrideTargetId={target_UUID}`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{object_UUID}`

URL to list all overrides on a particular object:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{vlantag_UUID}/overrides`

URL for override for an object on a particular domain or device:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags/{vlantag_UUID}?overrideTargetId={target_UUID}`

URL for listing only unused objects:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags?filter=unusedOnly:true`

URL for searching by name or value:

`/api/fmc_config/v1/domain/{domain_UUID}/object/vlantags?filter=nameOrValue:{name_or_value}`

Permissions: Object Manager

# Policy Services

## DELETE accesspolicies

Request Type: **DELETE**

Description: Deletes the access control policy with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{object_UUID}`

Permissions: Policies>Access Control Policy>Modify Access Control Policy

## PUT accesspolicies

Request Type: **PUT**

Description: Modifies an access control policy.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{object_UUID}`

Permissions: Policies>Access Control Policy>Modify Access Control Policy

## POST accesspolicies

Request Type: **POST**

Description: Creates an access control policy with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies`

Permissions: Policies>Access Control Policy>Modify Access Control Policy

## GET accesspolicies

Request Type: **GET**

Description: Retrieves the access control policy associated with the specified ID. If no ID is specified, retrieves a list of all access control policies.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{object_UUID}`

Permissions: Policies

## DELETE accessrules

Request Type: **DELETE**

Description: Deletes an access control rule in the specified access control policy.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/accessrules/{object_UUID}`

Permissions: Policies>Access Control>Access Control Policy>Modify Access Control Policy

## PUT accessrules

Request Type: **PUT**

Description: Modifies an access control rule in the specified access control policy.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/accessrules/{object\_UUID}

Permissions: Policies>Access Control>Access Control Policy>Modify Access Control Policy

## POST accessrules

Request Type: **POST**

Description: Creates an access control rule in the specified access control policy.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/accessrules

Permissions: Policies>Access Control>Access Control Policy>Modify Access Control Policy

## GET accessrules

Request Type: **GET**

Description: Retrieves the access control rule associated with the specified policy ID and rule ID. If no rule ID is specified, retrieves list of all access rules associated with the specified policy ID.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/accessrules

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/accessrules/{object\_UUID}

Permissions: Policies>Access Control>Access Control Policy

## DELETE categories

Request Type: **DELETE**

Description: Deletes a category associated with the specified policy ID.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/categories/{object\_UUID}

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

## PUT categories

Request Type: **PUT**

Description: Modifies the category associated with the specified policy ID.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/categories/{object\_UUID}

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

## POST categories

Request Type: **POST**

Description: Creates a category for access control policies.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/categories

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

## GET categories

Request Type: **GET**

Description: Retrieves the category associated with the specified policy ID. If no ID is specified, retrieves list of all categories associated with the specified policy ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/categories

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/categories/{object\_UUID}

Permissions: Policies > Access Control > Access Control Policy

## PUT defaultactions

Request Type: **PUT**

Description: Modifies the default action associated with the specified access control policy ID and default action ID.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/defaultactions/{object\_UUID}

Permissions: Policies>Access Control>Access Control Policy>Modify Access Control Policy

## GET defaultactions

Request Type: **GET**

Description: Retrieves the default action associated with the specified access control policy ID and default action ID. If no default action ID is specified, retrieves list of all default actions associated with the specified access control policy ID.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/defaultactions

URL for GET by ID:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/accesspolicies/{container\_UUID}/defaultactions/{object\_UUID}

Permissions: Policies>Access Control>Access Control Policy

## GET loggingsettings

Request Type: **GET**

Description: Retrieves the logging setting associated with the specified access control policy ID and default action ID. If no default action ID is specified, retrieves list of all default actions associated with the specified access control policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/loggingsettings`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/loggingsettings/{object_UUID}`

Permissions: Policies

## PUT loggingsettings

Request Type: **PUT**

Description: Modifies the logging setting associated with the specified access control policy ID and default action ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/loggingsettings/{objectId}`

Permissions: Policies>Access Control Policy>Modify Access Control Policy

## GET securityintelligencepolicies

Request Type: **GET**

Description: Retrieves the security intelligence policy associated with the specified Access Policy. If no ID is specified for a GET, retrieves all security intelligence policies.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/securityintelligencepolicies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/securityintelligencepolicies/{objectId}`

Permissions: Intelligence

## GET dnspolicies

Request Type: **GET**

Description: Retrieves the DNS Policy. If no ID is specified, retrieves a list of all DNS policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/dnspolicies`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/policy/dnspolicies/{objectId}`

Permissions: Policies > Access Control > DNS Policy

Parameters available for filtering: name.

## GET allowdnsrules

Request Type: **GET**

Description: Retrieves all the allow rules for a given DNS Policy.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/dnspolicies/{containerUUID}/allowdnsrules`

Permissions: Policies > Access Control > DNS Policy

Parameters available for filtering: name

## GET blockdnsrules

Request Type: **GET**

Description: Retrieves all the block rules for a given DNS Policy.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/dnspolicies/{containerUUID}/blockdnsrules`

Permissions: Policies > Access Control > DNS Policy

Parameters available for filtering: name

## GET dynamicaccesspolicies

Request Type: **GET**

Description: Retrieves the Dynamic Access Policy. If no ID is specified for a GET, retrieves list of all Dynamic Access Policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/dynamicaccesspolicies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/dynamicaccesspolicies/{objectId}`

Permissions: Devices > VPN

## PUT dynamicaccesspolicies

Request Type: **PUT**

Description: Modifies the Dynamic Access Policy associated with the specified rule ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/dynamicaccesspolicies/{objectId}`

Permissions: Devices > VPN > Modify VPN

## POST dynamicaccesspolicies

Request Type: **POST**

Description: Creates a Dynamic Access policy associated.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/dynamicaccesspolicies`

Permissions: Devices > VPN > Modify VPN

## DELETE dynamicaccesspolicies

Request Type: **DELETE**

Description: Deletes the Dynamic Access Policy associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domainUUID}/policy/dynamicaccesspolicies/{objectId}

Permissions: Devices > VPN > Modify VPN

## GET filepolicies

Request Type: **GET**

Description: Retrieves the file policy object associated with the specified ID. If no ID is specified, retrieves list of all file policy objects.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/filepolicies

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/filepolicies/{object\_UUID}

Permissions: Policies>Access Control>Malware & File Policy

## DELETE ftdnatpolicies

Request Type: **DELETE**

Description: Deletes the threat defense NAT policy with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies/{object\_UUID}

Permissions: Devices>NAT>NAT List >Modify NAT policy

## PUT ftdnatpolicies

Request Type: **PUT**

Description: Modifies an threat defense NAT policy with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies/{object\_UUID}

Permissions: Devices>NAT>NAT List >Modify NAT policy

## POST ftdnatpolicies

Request Type: **POST**

Description: Creates a threat defense device NAT policy with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies

URL for Bulk Post: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies?bulk=true

Permissions: Devices>NAT>NAT List >Modify NAT policy



## GET ftdnatpolicies

Request Type: **GET**

Description: Retrieves the threat defense NAT policy associated with the specified ID. If no ID is specified, retrieves a list of all threat defense NAT policies.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies/{object\_UUID}

Permissions: Devices>NAT>NAT List

## DELETE ftds2svpns

Request Type: **DELETE**

Description: Deletes the threat defense Site to Site VPN topology associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpns/{topology\_UUID}

Permissions: Devices > VPN > Modify VPN

## PUT ftds2svpns

Request Type: **PUT**

Description: Modifies a threat defense Site to Site VPN topology associated with the specified ID.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpns/{topology\_UUID}

Permissions: Devices > VPN > Modify VPN

## POST ftds2svpns

Request Type: **POST**

Description: Creates a threat defense Site to Site VPN topology with the specified parameters.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpns

Permissions: Devices > VPN > Modify VPN

## GET ftds2svpns

Request Type: **GET**

Description: Retrieves the threat defense Site to Site VPN topology associated with the specified ID. If no ID is specified, retrieves a list of all threat defense Site to Site VPN topologies.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpns

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpns/{topology\_UUID}

Permissions: Devices > VPN

## PUT advancedsettings

Request Type: **PUT**

Description: Modifies advanced settings inside a VPN Site to Site Topology.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpn/{topology\_UUID}/advancedsettings/{advancedsetting\_UUID}

Permissions: Devices > VPN > Modify VPN

## GET advancedsettings

Request Type: **GET**

Description: Retrieves an advanced settings inside a VPN Site to Site Topology. If no ID is specified for a GET, retrieves list containing a single AdvancedSettings entry of the topology.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpn/{topology\_UUID}/advancedsettings

URL for GET by ID: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpn/{topology\_UUID}/advancedsettings/{advancedSetting\_UUID}

Permissions: Devices > VPN

## DELETE endpoints

Request Type: **DELETE**

Description: Deletes all endpoints in a topology or a specific endpoint associated with the specified ID inside a VPN Site to Site Topology.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpn/{topology\_UUID}/endpoints/{endpoint\_UUID}

Permissions: Devices > VPN > Modify VPN

## PUT endpoints

Request Type: **PUT**

Description: Modifies all endpoints in a topology or a specific endpoint associated with the specified ID inside a VPN Site to Site Topology.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpn/{topology\_UUID}/endpoints/{endpoint\_UUID}

Permissions: Devices > VPN > Modify VPN

## POST endpoints

Request Type: **POST**

Description: Creates all endpoints in a topology or a specific endpoint associated with the specified ID inside a VPN Site to Site Topology.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpn/{topology_UUID}/endpoints`

Permissions: Devices > VPN > Modify VPN

## GET endpoints

Request Type: **GET**

Description: Retrieves all endpoints in a topology or a specific endpoint associated with the specified ID inside a VPN Site to Site Topology. If no ID is specified for a GET, retrieves list of all Endpoints of a topology.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpn/{topology_UUID}/endpoints`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpn/{topology_UUID}/endpoints/{endpoint_UUID}`

Permissions: Devices > VPN

## PUT ikesettings

Request Type: **PUT**

Description: Modifies the IKE Settings associated with the specified ID inside a VPN Site to Site Topology.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpn/{topology_UUID}/ikesettings/{ikesetting_UUID}`

Permissions: Devices > VPN > Modify VPN

## GET ikesettings

Request Type: **GET**

Description: Retrieves the IKE Settings associated with the specified ID inside a VPN Site to Site Topology. If no ID is specified for a GET, retrieves IKE Settings of a topology.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpn/{topology_UUID}/ikesettings`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpn/{topology_UUID}/ikesettings/{ikesetting_UUID}`

Permissions: Devices > VPN

## PUT ipsecsettings

Request Type: **PUT**

Description: Modifies an IPsec Proposal settings inside a VPN Site to Site Topology.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftds2svpn/{topology_UUID}/ipsecsettings/{ipsecsetting_UUID}`

Permissions: Devices > VPN > Modify VPN

## GET ipsecsettings

Request Type: **GET**

Description: Retrieves an IPsec Proposal Settings inside a VPN Site To Site Topology. If no ID is specified for a GET, retrieves list containing a single IPsec Settings entry of the topology.

URL: /api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftds2svpns/{topology\_UUID}/ipsecsettings

URL for GET by ID: /api/fmc\_config/v1/domain/DomainUUID/policy/ftds2svpns/{topology\_UUID}/ipsecsettings/{ipsecsetting\_UUID}

Permissions: Devices > VPN

## DELETE autonatrules

Request Type: **DELETE**

Description: Deletes a NAT rule with the specified parameters.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies/{container\_UUID}/autonatrules/{object\_UUID}

Permissions: Devices>NAT>NAT List >Modify NAT policy

## PUT autonatrules

Request Type: **PUT**

Description: Modifies a NAT rule with the specified parameters.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies/{container\_UUID}/autonatrules/{autonatrule\_UUID}

Permissions: Devices>NAT>NAT List >Modify NAT policy

## POST autonatrules

Request Type: **POST**

Description: Creates a NAT policy with the specified parameters.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies/{container\_UUID}/autonatrules

Permissions: Devices>NAT>NAT List >Modify NAT policy

## GET autonatrules

Request Type: **GET**

Description: Retrieves the NAT rule associated with the specific ID. If no ID is specified, retrieves a list of all NAT rules.

URL:

/api/fmc\_config/v1/domain/{domain\_UUID}/policy/ftdnatpolicies/{container\_UUID}/autonatrules

URL for GET by ID:

```
/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/autonatrules/{object_UUID}
```

Permissions: Devices>NAT>NAT List

## PUT autonatrules

Request Type: **PUT**

Description: Modifies a NAT rule with the specified parameters.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/autonatrules/{autonatrule_UUID}
```

Permissions: Devices>NAT>NAT List >Modify NAT policy

## DELETE manualnatrules

Request Type: **POST**

Description: Deletes a manual NAT rule in the specified NAT policy.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/manualnatrules/{object_UUID}
```

Permissions: Devices>NAT>NAT List >Modify NAT policy

## PUT manualnatrules

Request Type: **PUT**

Description: Modify a manual NAT rule in the specified NAT policy.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/manualnatrules/{object_UUID}
```

Permissions: Devices>NAT>NAT List >Modify NAT policy

## POST manualnatrules

Request Type: **POST**

Description: Creates manual NAT rules with the specified parameters.

URL:

```
/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/manualnatrules
```

Permissions: Devices>NAT>NAT List >Modify NAT policy

## GET manualnatrules

Request Type: **GET**

Description: Retrieves the manual NAT rule associated with the specified ID. If no ID is specified, retrieves a list of all manual NAT rules.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/manualnatrules`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/manualnatrules/{object_UUID}`

Permissions: Devices>NAT>NAT List

## GET natrules

Request Type: **GET**

Description: Retrieves the list of all NAT rules (manual and auto) associated with the specified NAT policy.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/ftdnatpolicies/{container_UUID}/natrules`

Permissions: Devices>NAT>NAT List

## PUT inheritancesettings

Request Type: **PUT**

Description: Modifies the inheritance settings associated with specified Access Policy.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/inheritancesettings/{object_UUID}`

Permissions: Policies > Access Control Policy > Modify Access Control Policy

## GET inheritancesettings

Request Type: **GET**

Description: Retrieves the inheritance settings associated with specified Access Policy. If no ID is specified, retrieves a list of all inheritance settings.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/inheritancesettings/`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/accesspolicies/{container_UUID}/inheritancesettings/{object_UUID}`

Permissions: Policies > Access Control Policy

## GET identitypolicies

Request Type: **GET**

Description: Retrieves the Identity Policy associated with the specified ID. If no ID is specified, retrieves all Identity Policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/identitypolicies`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/policy/identitypolicies/{objectId}`

Permissions: Policies > Access Control > Identity Policy

## GET intrusionpolicies

Request Type: **GET**

Description: Retrieves the intrusion policy associated with the specified ID. If no ID is specified, retrieves list of all intrusion policies.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/intrusionpolicies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/intrusionpolicies/{object_UUID}`

Permissions: Policies > Access Control > Intrusion Policy

## PUT intrusionpolicies

Request Type: **PUT**

Description: Modifies the intrusion policy associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## POST intrusionpolicies

Request Type: **POST**

Description: Creates an intrusion policy with the specified parameters.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## DELETE intrusionpolicies

Request Type: **DELETE**

Description: Deletes the intrusion policy associated with the specified ID.

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/intrusionpolicies/{object_UUID}`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## GET intrusionrulegroups

Request Type: **GET**

Description: Retrieves the per-policy behaviour of the specified intrusion rule ID for the target intrusion policy ID. If no rule ID is specified for a GET, retrieves list of all Snort 3 intrusion rulegroups associated with the policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrulegroups/`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrulegroups/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy

## PUT intrusionrulegroups

Request Type: **PUT**

Description: Modifies the per-policy behaviour of the specified intrusion rule ID for the target intrusion policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrulegroups/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## POST intrusionrulegroups

Request Type: **PUT**

Description: Modifies the per-policy behaviour of the specified intrusion rule ID for the target intrusion policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrulegroups/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy

## GET intrusionrules

Request Type: **GET**

Description: Retrieves the per-policy behaviour of the specified intrusion rule ID for the target intrusion policy ID. If no rule ID is specified for a GET, retrieves list of all Snort 3 intrusion rules associated with the policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrules`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrules/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy

## PUT intrusionrules

Request Type: **PUT**

Description: Modifies the per-policy behaviour of the specified intrusion rule ID for the target intrusion policy ID.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/intrusionpolicies/{containerUUID}/intrusionrules/{objectId}`

Permissions: Policies > Access Control > Intrusion Policy > Modify Intrusion Policy



## GET networkanalysispolicies

Request Type: **GET**

Description: Retrieves the network analysis policy with the specified ID. If no ID is specified, retrieves list of all network analysis policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{objectId}`

Permissions: Policies > Access Control > Access Control Policy

## PUT networkanalysispolicies

Request Type: **PUT**

Description: Modifies the network analysis policy associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{objectId}`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

## POST networkanalysispolicies

Request Type: **POST**

Description: Creates a network analysis policy.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

## DELETE networkanalysispolicies

Request Type: **DELETE**

Description: Deletes the network analysis policy associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{objectId}`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

## GET Inspector Configurations

Request Type: **GET**

Description: Retrieves the Snort3 custom NAP.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{containerUUID}/inspectorconfigs`

Permissions: Policies > Access Control > Access Control Policy

## GET inspectoroverrideconfigs

Request Type: **GET**

Description: Retrieves the Snort3 custom NAP override.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{containerUUID}/inspectoroverrideconfigs`

Permissions: Policies > Access Control > Access Control Policy

## PUT inspectoroverrideconfigs

Request Type: **PUT**

Description: Modifies the Snort3 custom NAP override.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/networkanalysispolicies/{containerUUID}/inspectorconfigs`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

## DELETE prefilterpolicies

Request Type: **DELETE**

Description: Deletes a prefilter policy associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

## PUT prefilterpolicies

Request Type: **PUT**

Description: Modifies a prefilter policy associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

## POST prefilterpolicies

Request Type: **POST**

Description: Creates a prefilter policy associated with the specified ID.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

## GET prefilterpolicies

Request Type: **GET**

Description: Retrieves the prefilter policy associated with the specified ID. If no ID is specified, retrieves a list of all prefilter policies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/prefilterpolicies`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/prefilterpolicies/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy

## GET remoteaccessvpns

Request Type: **GET**

Description: Retrieves the threat defense RA VPN topology associated with the specified ID. If no ID is specified for a GET, retrieves list of all threat defense RA VPN topologies.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns`

URL for GET by ID: `/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{objectId}`

Permissions: Devices > VPN

## GET addressassignmentsettings

Request Type: **GET**

Description: Retrieves Address Assignment Setting inside a VPN RA Topology. If no ID is specified for a GET, retrieves list containing a single Address Assignment Setting entry of the topology.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/addressassignmentsettings`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/addressassignmentsettings/{objectId}`

Permissions: Devices > VPN

## GET certificatemapsettings

Request Type: **GET**

Description: Retrieves Certificate Map Setting inside a VPN RA Topology. If no ID is specified for a GET, retrieves list containing a single Certificate Map Setting entry of the topology.

URL:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/certificatemapsettings`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/certificatemapsettings/{objectId}`

Permissions: Devices > VPN

## GET connectionprofiles

Request Type: **GET**

Description: Retrieves Connection Profile data inside a VPN RA Topology. If no ID is specified for a GET, retrieves list containing a single Connection Profile entry of the topology.

URL: `/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/connectionprofiles`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domainUUID}/policy/ravpns/{containerUUID}/connectionprofiles/{objectId}`

Permissions: Devices > VPN

## DELETE hitcounts

Request Type: **DELETE**

Description: Deletes the hit count information and resets the hit count to zero for an assigned policy or rule in a device, from the management center.

Note that the DELETE operation returns a 200 (OK) message upon successful completion of the operation.

URLs:

- `/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`
- `/api/fmc_config/v1/domain/{domainUUID}/policy/prefilterpolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`

Permissions:

- Policies>Access Control Policy>Modify Access Control Policy
- Policies>Prefilter Policy>Modify Prefilter Policy

## PUT hitcounts

Request Type: **PUT**

Description: Retrieves the latest hit count information for a device against an assigned policy, and stores it in the management center.

URLs:

- `/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`
- `/api/fmc_config/v1/domain/{domainUUID}/policy/prefilterpolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`

Permissions:

- Policies>Access Control Policy>Modify Access Control Policy
- Policies>Prefilter Policy>Modify Prefilter Policy

## GET hitcounts

Request Type: **GET**

Description: Retrieves the last collected hit count information for a device against an assigned policy or its rules, from the management center.

Note that during the GET operation, hit counts will be automatically pre-fetched from the device if it is the first retrieval being done against a specific device.

URLs:

- `/api/fmc_config/v1/domain/{domainUUID}/policy/accesspolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`
- `/api/fmc_config/v1/domain/{domainUUID}/policy/prefilterpolicies/{containerUUID}/operational/hitcounts?filter="{filterString}"`

Permissions:

- Policies>Access Control Policy>Modify Access Control Policy
- Policies>Prefilter Policy>Modify Prefilter Policy

## DELETE prefilterrules

Request Type: **DELETE**

Description: Deletes the prefilter rule associated with the specified rule ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{container_UUID}/prefilterrules/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

## PUT prefilterrules

Request Type: **PUT**

Description: Modifies the prefilter rule associated with the specified rule ID.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{container_UUID}/prefilterrules/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

## POST prefilterrules

Request Type: **POST**

Description: Creates a prefilter rule.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{container_UUID}/prefilterrules`

Permissions: Policies > Access Control > Prefilter Policy > Modify Prefilter Policy

## GET prefilterrules

Request Type: **GET**

Description: Retrieves the prefilter rule associated with the specified rule ID. If no ID is specified, retrieves list of all prefilter rules.

URL:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{container_UUID}/prefilterrules/`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/policy/prefilterpolicies/{container_UUID}/prefilterrules/{object_UUID}`

Permissions: Policies > Access Control > Prefilter Policy

## GET snmpalerts

Request Type: **GET**

Description: Retrieves the SNMP alert object associated with the specified ID. If no ID is specified, retrieves a list of all SNMP alert objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/snmpalerts`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/policy/snmpalerts/{object_UUID}`

Permissions: Policies > Actions > Alerts > View Alerts

## GET syslogalerts

Request Type: **GET**

Description: Retrieves the syslog alert object associated with the specified ID. If no ID is specified, retrieves a list of all syslog alert objects.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/policy/syslogalerts`

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/policy/syslogalerts/{object_UUID}`

Permissions: Policies > Actions > Alerts

# Policy Assignment Services

## PUT policyassignments

Request Type: **PUT**

Description: Modifies an assigned access policy to add a new device or a new device group.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/assignment/policyassignments/{object_UUID}`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

## POST policyassignments

Request Type: **POST**

Description: Assigns an unassigned access policy to devices or device groups.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/assignment/policyassignments`

Permissions: Policies > Access Control > Access Control Policy > Modify Access Control Policy

## GET policyassignments

Request Type: **GET**

Description: Retrieves the policy assignment associated with the specified ID. If no ID is specified, retrieves a list of all policy assignments to target devices.

URL: `/api/fmc_config/v1/domain/{domain_UUID}/assignment/policyassignments`

URL for GET by ID:

`/api/fmc_config/v1/domain/{domain_UUID}/assignment/policyassignments/{object_UUID}`

Permissions: Policies > Access Control > Access Control Policy

Parameters available for filtering: name

## Status Services

### GET taskstatuses

Description: Retrieves information about a previously submitted pending job/task with the specified ID. This is currently supported for device registration and deployment jobs.

URL for GET by ID: `/api/fmc_config/v1/domain/{domain_UUID}/job/taskstatuses/{object_UUID}`

Permissions: Modify Devices/Deployment

## System Information

### GET domain

Request Type: **GET**

Description: Requests version information for the domain. If no ID is specified, retrieves a list of all domains.

URL: `/api/fmc_platform/v1/info/domain/{domain_UUID}/`

URL for GET by ID: `/api/fmc_platform/v1/info/domain/{domain_UUID}/{object_UUID}`

Permissions: System > Domains

### GET serverversion

Request Type: **GET**

Description: Requests version information for the server. If no ID is specified, retrieves a list of all servers.

URL: `/api/fmc_platform/v1/info/serverversion`

URL for GET by ID: `/api/fmc_platform/v1/info/serverversion/{objectID}`

Permissions:

# Update Packages

## POST Cancel Upgrades

Request Type: **POST**

Description: This POST operation cancels software upgrade packages to applicable devices running threat defense.

URL: `/api/fmc_platform/v1/updates/cancelupgrades`

Permissions: System > Updates

## POST Retry Upgrades

Request Type: **POST**

Description: This POST operation retries software upgrade packages to applicable devices running threat defense.

URL: `/api/fmc_platform/v1/updates/retryupgrades`

Permissions: System > Updates

## DELETE upgradepackages

Request Type: **DELETE**

Description: Deletes a specific threat defense upgrade package from the managing management center.

URL: `/api/fmc_platform/v1/updates/upgradepackages/{package_UUID}`

## GET upgradepackages

Request Type: **GET**

Description: Retrieves a list of locally available threat defense upgrade packages, including major upgrades, maintenances release upgrades, and hotfixes.

URL: `/api/fmc_platform/v1/updates/upgradepackages`

URL for GET by ID: `/api/fmc_platform/v1/updates/upgradepackages/{package_UUID}`

## GET listapplicabledevices

Request Type: **GET**

Description: Lists registered device containers that support the specific upgrade package.

URL: `/api/fmc_platform/v1/updates/upgradepackages/{container_UUID}/applicabledevices`



## POST upgradepackage

Request Type: **POST**

Description: Dependent on the parameters, this POST operation either pushes available software upgrade packages to applicable devices running threat defense or initiates the upgrade process for applicable devices running threat defense. This process is applicable for standalone, clustered, or high availability pairs with the following limitations:

- For all configurations, ensure that the current POST operation is completed successfully before proceeding to the next POST operation.
- Perform the POST operation on the primary node of a high availability pair. Do not perform the POST operation for more than one high availability pair at a time.
- Perform the POST operation on the



**Note** Typically, the first POST operation responds within 60 seconds. Cisco recommends that you perform subsequent POST operations at least 120 seconds after the first POST operation was initiated. The response of the POST operation includes a task object, with a task ID and task status. You can monitor the completion of the task by performing a GET operation on the task object with its task ID. For more information, see [GET taskstatuses, on page 147](#).

URL: `/api/fmc_platform/v1/updates/upgrades/`

## POST revertupgrades

Request Type: **POST**

Description: Triggers reversion of an upgrade.

URL: `/api/fmc_platform/v1/updates/revertupgrades`

Permissions: System > Tools > Scheduling

## GET upgradepackages: Monitor

Request Type: **GET**

Description: Monitors the upgrade process once you have executed the POST upgrade task.

URL: `/api/fmc_platform/v1/domain/{domain_UUID}/job/taskstatuses/{task_ID}`

