

# Cisco Catalyst 8300 Series Edge Platforms

---

# Contents

Product overview	3
Platform details	4
Platform Performance	6
Overall platform benefits	8
Supported modules	11
Memory, storage, and accessory options	14
Optics and transceivers modules	15
Resiliency and high availability	15
Power supplies	15
Software requirements	17
Software features	17
Licensing	19
Cisco Smart Licensing	19
Specifications	20
Services	22
Cisco Capital	23
Ordering information	23
For more information	23
Document history	23

The Cisco Catalyst 8300 Series Edge Platforms are best-of-breed, 5G-ready, cloud edge platforms designed for accelerated services, multi-layer security, cloud-native agility, and edge intelligence to accelerate your journey to cloud.



Cisco Catalyst 8300 Series Edge Platforms (Catalyst 8300) with Cisco IOS XE SD-WAN Software deliver Cisco’s secure, cloud-scale SD-WAN solution for the branch. The Catalyst 8300 Series is purpose-built for high performance and integrated SD-WAN Services along with flexibility to deliver security and networking services together from the cloud or on premises. It provides higher WAN port density and a redundant power supply capability. The Catalyst 8300 Series Edge Platforms have a wide variety of interface options to choose from—ranging from lower and higher module density with backward compatibility to a variety of existing WAN, LAN, voice, and compute modules. Powered by Cisco IOS XE, fully programmable software architecture, and API support, these platforms can facilitate automation at scale to achieve zero-touch IT capability while migrating workloads to the cloud. Catalyst 8300 Series Edge Platforms also come with Trustworthy Solutions 2.0 infrastructure that secures the platforms against threats and vulnerabilities with integrity verification and remediation of threats.

The Catalyst 8300 Series Edge Platforms are well suited for medium-sized and large enterprise branch offices for high WAN IPsec performance with integrated SD-WAN services.

## Product overview

### Product highlights

**Table 1.** Product highlights


Product feature	Benefits and description
<b>Multicore processors</b>	<ul style="list-style-type: none"> <li>• Intel x86 CPU with 8-GB memory default (up to 32 GB memory upgrade)</li> <li>• High-performance multicore processors support high-speed WAN connections.</li> <li>• Dynamic core allocation architecture that can leverage data plane cores for I/O and service plane as per-user configuration.</li> </ul>
<b>Embedded IPsec VPN hardware acceleration</b>	<ul style="list-style-type: none"> <li>• Up to 9.3 Gbps of IPsec Internet Mix (IMIX) traffic</li> <li>• Increases scalability for IPsec throughput needs for medium- and large-sized branches</li> <li>• SSL and crypto hardware acceleration</li> </ul>
<b>Integrated Gigabit Ethernet ports</b>	<ul style="list-style-type: none"> <li>• Provides 6 built-in Layer 3 Ethernet ports for WAN or LAN with port speeds ranging from 10Mbps, 100Mbps, 1Gbps and up to 10Gbps, depending on platform model</li> <li>• All platforms have at least 2 Ethernet ports that can support Small Form-Factor Pluggable (SFP or SFP+) based connectivity in addition to 4 RJ-45 connections, enabling fiber or copper connectivity.</li> </ul>
<b>DRAM</b>	<ul style="list-style-type: none"> <li>• All Catalyst 8300 platforms have 8GB default DRAM and can be upgraded to 16GB and 32GB for higher scale and performance.</li> </ul>
<b>Flash memory support</b>	<ul style="list-style-type: none"> <li>• All Catalyst 8300 platforms have an integrated on-board 8GB flash and it is not upgradeable. M.2 storage provides upgrade options for additional storage.</li> </ul>

Product feature	Benefits and description
<b>M.2 storage</b>	<ul style="list-style-type: none"> <li>All the Catalyst 8300 models ship with default 16GB M.2 USB for SD-WAN logging and additional storage on the platform. It can be upgraded to 32GB M.2 USB and to 600GB or 2TB M.2 Non-Volatile Memory Express (NVMe)</li> </ul>
<b>Default dual power supplies</b>	<ul style="list-style-type: none"> <li>All Catalyst 8300 platforms ship with dual power supplies for redundancy.</li> <li>AC Power over Ethernet (PoE), DC and High-Voltage DC (HVDC) options are available on all models.</li> <li>Enabling PoE portson Network Interface Modules (NIM) or on Service Modules (SM) requires at least one PoE supporting PSU to be installed</li> </ul>
<b>Modularity and form factor</b>	<ul style="list-style-type: none"> <li>1RU and 2RU form factor</li> <li>Supports SM, NIM, and Pluggable Interface Module (PIM) slots</li> </ul>
<b>Integrated security</b>	<ul style="list-style-type: none"> <li>Hardware-anchored Secure Boot and Secure Unique Device Identification (SUDI) support for Plug and Play to verify the identity of the hardware and software</li> </ul>

## Platform details

### Models and configurations

Figures 1 through 4 highlight the different models included in the Catalyst 8300 Series Edge Platforms.

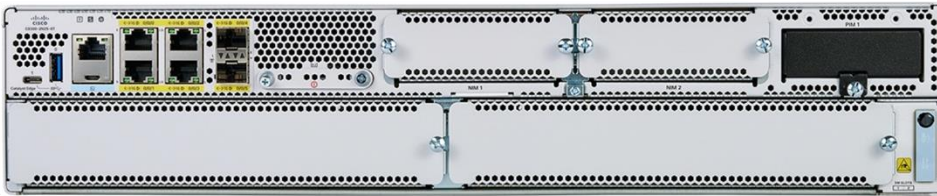

**Figure 1.**

C8300-2N2S-4T2X is a 2RU platform with 2 SM and 2 NIM slots plus 2 x 10Gbps and 4 x 1Gbps embedded Layer3 Ethernet ports



**Figure 2.**

C8300-2N2S-6T is a 2RU platform with 2 SM and 2 NIM slots plus 6 x 1Gbps embedded Layer3 Ethernet ports



**Figure 3.**

C8300-1N1S-4T2X is a 1RU platform with 1 SM slot and 1 NIM slot plus 2 x 10Gbps and 4 x 1Gbps embedded Layer3 Ethernet ports



**Figure 4.**

C8300-1N1S-6T is a 1RU platform with 1 SM slot and 1 NIM slot plus 6 x 1Gbps embedded Layer3 Ethernet ports

Tables 2 and 3 detail platform specifications and performance, respectively.

**Table 2.** Cisco Catalyst 8300 Series specifications

Model	Description	10G port density	1G port density	Slots	Memory (DRAM) default	Storage (M.2 SSD) default
<b>C8300-2N2S-4T2X</b>	C8300 2RU w/ 10G WAN (2 SM and 2 NIM slots, and 2 x 10-Gigabit Ethernet and 4 x 1-Gigabit Ethernet ports)	2	4	2 SM 2 NIM 1 PIM	8 GB	16 GB
<b>C8300-2N2S-6T</b>	C8300 2RU w/ 1G WAN (2 SM and 2 NIM slots, and 6 x 1-Gigabit Ethernet ports)	-	6	2 SM 2 NIM 1 PIM	8 GB	16 GB
<b>C8300-1N1S-4T2X</b>	C8300 1RU w/ 10G WAN (1 SM slot and 1 NIM slot, and 2 x 10-Gigabit Ethernet and 4 x 1-Gigabit Ethernet ports)	2	4	1 SM 1 NIM 1 PIM	8 GB	16 GB
<b>C8300-1N1S-6T</b>	C8300 1RU w/ 1G WAN (1 SM slot and 1 NIM slot, and 6 x 1-Gigabit Ethernet ports)	-	6	1 SM 1 NIM 1 PIM	8 GB	16 GB

## Platform Performance

### Traffic patterns and use cases

**Table 3.** Cisco Catalyst 8300 Series SD-WAN performance

Feature	C8300-2N2S-4T2X (2RU w/ 10G WAN)	C8300-1N1S-4T2X (1RU w/ 10G WAN)	C8300-2N2S-6T (2RU w/ 1G WAN)	C8300-1N1S-6T (1RU w/ 1G WAN)
SD-WAN IPsec Throughput (1400Bytes)	Up to 18.8Gbps	Up to 17Gbps	Up to 2Gbps	Up to 2Gbps
SD-WAN IPsec Throughput with IQDF** (1400Bytes)	Up to 18.8Gbps	Up to 17Gbps	Up to 2Gbps	Up to 2Gbps
SD-WAN IPsec Throughput (IMIX*)	7.6Gbps	6.3Gbps	1.8Gbps	1.8Gbps
SD-WAN IPsec Throughput with IQDF** (IMIX*)	5.6Gbps	5.5Gbps	1.7Gbps	1.7Gbps
SD-WAN Overlay Tunnels scale	6000	6000	6000	6000

\* IMIX is average packet size of 352 Bytes packet size

\*\* IQDF traffic pattern: IPSec + Quality of Service (QoS) + Deep Packet Inspection (DPI) + Flexible Netflow (FNF)

### SD-WAN Multi-layer security performance use cases

The Cisco Catalyst 8300 Series Edge platforms connect branch offices to the Internet and cloud, with industry-leading protection against major web attacks. Table 3b below provides test results for three common Multi-layer Security use cases in SD-WAN

- The first use case is with 50% of the traffic encrypted in IQDF traffic pattern (IPSec + Quality of Service (QoS) + Deep Packet Inspection (DPI) + Flexible Netflow (FNF) and another 50% of unencrypted Direct Internet Access (DIA) traffic protected by advanced security features. This protection includes NG-FW, IPS, URLF (URL-Filtering) and AMP (Advanced Malware Protection).
- The third use case is with 100% unencrypted DIA traffic protected by the same advanced security features as in the second use case,

**Table 4.** Cisco Catalyst 8300 Series SD-WAN, Multi-layer security performance use cases \*

Feature	C8300-2N2S-4T2X (2RU w/ 10G WAN)	C8300-1N1S-4T2X (1RU w/ 10G WAN)	C8300-2N2S-6T (2RU w/ 1G WAN)	C8300-1N1S-6T (1RU w/ 1G WAN)
50% IQDF* + 50% (DIA w. NAT + NGFW + IPS + URLF + AMP)	5.9Gbps	3.3Gbps	2.8Gbps	2.6Gbps
DIA w. NAT + NGFW + IPS + URLF + AMP	4.9Gbps	2.9Gbps	2.3Gbps	2.1Gbps

\* Tested with IOS XE release 17.12.2. All NGFW + UTD tests with Firewall EMIX traffic profile

**Table 5.** Cisco Catalyst 8300 Series autonomous mode (non SD-WAN) performance specifications

Feature	C8300-2N2S-4T2X (2RU w/ 10G WAN)	C8300-1N1S-4T2X (1RU w/ 10G WAN)	C8300-2N2S-6T (2RU w/ 1G WAN)	C8300-1N1S-6T (1RU w/ 1G WAN)
<b>IPv4 Forwarding Throughput (1400Bytes)</b>	Up to 19.7Gbps	Up to 19.7Gbps	Up to 19.7Gbps	Up to 19.7Gbps
<b>IPsec Throughput (1400Bytes)</b>	Up to 18.9Gbps	Up to 16.9Gbps	Up to 1.9Gbps	Up to 1.9Gbps
<b>IPsec Throughput (IMIX*)</b>	9.3Gbps	6.6Gbps	1.9Gbps	1.9Gbps

\* IMIX is average packet size of 352 Bytes packet size

**Table 6.** Cisco Catalyst 8300 Series autonomous mode (non SD-WAN) system scalability

Feature	C8300-2N2S-4T2X (2RU w/ 10G WAN)	C8300-1N1S-4T2X (1RU w/ 10G WAN)	C8300-2N2S-6T (2RU w/ 1G WAN)	C8300-1N1S-6T (1RU w/ 1G WAN)
<b>Number of IPsec SVTI Tunnels</b>	4000	4000	4000	4000
<b>Number of ACLs per system</b>	4000	4000	4000	4000
<b>Number of IPv4 ACEs per system</b>	72K	72K	72K	72K
<b>Number of IPv4 Routes</b>	1.6M w/ default 8GB, up to 4M w/ 32GB	1.6M w/ default 8GB, up to 4M w/ 32GB	1.6M w/ default 8GB, up to 4M w/ 32GB	1.6M w/ default 8GB, up to 4M w/ 32GB
<b>Number of IPv6 Routes</b>	1.5M w/ default 8GB, up to 4M w/ 32GB	1.5M w/ default 8GB, up to 4M w/ 32GB	1.5M w/ default 8GB, up to 4M w/ 32GB	1.5M w/ default 8GB, up to 4M w/ 32GB
<b>Number of Queues</b>	16K	16K	16K	16K
<b>Number of NAT Sessions</b>	1.2M w/ default 8GB, up to 2M w/ 32GB	1.2M w/ default 8GB, up to 2M w/ 32GB	1.2M w/ default 8GB, up to 2M w/ 32GB	1.2M w/ default 8GB, up to 2M w/ 32GB
<b>Number of Firewall Sessions</b>	512K	512K	512K	512K
<b>Number of VRFs</b>	4000	4000	4000	4000

---

## Overall platform benefits

### **Dynamic core allocation**

Dynamic core allocation architecture will allow you to tailor the Cisco Catalyst 8300 Series Edge platforms's multicore resources to fit your business needs. You can choose between two core allocations.

- Service-oriented core allocation has the platform's Multicore resources set to balance throughput with providing adequate resources for containerized services. Choose this if integrated, container based, services are required. It will allow for KVM and/or Docker container-based applications on up to 5 cores, depending on platform. This is the factory default core allocation with which all C8300 platforms are shipped.
- Data plane heavy core allocation has the platform's Multicore resources optimized for high traffic throughput. Choose this architecture when throughput is of higher priority, A Data plane heavy architecture will on 8-core platforms completely remove resources for containerized services, whereas on the 12-core platform, C8300-2N2S-4T2X, it will reduce service plane resources from 5 to 4 cores. In order to maximize the platforms performance and your investment, it's recommended to change into a Data plane heavy core allocation when container-based services are not being required.

### **Accelerated services with Cisco Software-Defined WAN**

Cisco Catalyst SD-WAN is a set of intelligent software services that allow you to connect users, devices, and branch office locations reliably and securely across a diverse set of WAN transport links. Cisco Catalyst 8000 Series Edge Platforms can dynamically route traffic across the "best" link based on up-to-the-minute application and network conditions for great application experiences. You get tight control over application performance, bandwidth usage, data privacy, and availability of your WAN links—control you need as your branches conduct greater volumes of mission-critical business with both on-premises and cloud controllers.

### **Application performance optimization**

Ensure that Catalyst SD-WAN networks meet Service-Level Agreements (SLAs) and maintain strong performance, even if network problems occur. With branch multi-cloud access, you can accelerate your SaaS applications with a simple template push from the Catalyst SD-WAN controller. Features like Transmission Control Protocol (TCP) optimization, forward error correction, and packet duplication help application performance for a better user experience.

### **Application visibility**

Applications and users are more distributed than ever, and the internet has effectively become the new enterprise WAN. As organizations continue to embrace internet, cloud, and SaaS, network and IT teams are challenged to deliver consistent and reliable connectivity and application performance over networks and services they don't own or directly control.

The Catalyst 8300 Series Edge Platforms are integrated with Cisco ThousandEyes internet and cloud intelligence. IT managers now have expanded visibility, including hop-by-hop analytics, into network underlay, proactive monitoring of Catalyst SD-WAN overlay, and performance measurement of SaaS applications. This granular visibility ultimately lowers the Mean Time to Identification of Issues (MTTI) and accelerates resolution time.

### **Multi-layer security**

You can now move your traditional and complex WAN networks to a more agile software-defined WAN with integrated security. The Cisco Catalyst 8300 Series Edge platforms connect branch offices to the Internet and cloud, with industry-leading protection against major web attacks. Secure Direct Internet Access (DIA) to the



---

branches helps optimize branch workloads for improved performance, specifically for cloud-hosted applications. At the same time, DIA ensures your branch is protected from external threats.

### **Unified communications**

The Cisco Catalyst 8300 Edge platforms offer rich voice services in both Catalyst SD-WAN and traditional IOS-XE software feature stacks. Cisco is the only SDWAN vendor to natively integrate analog/digital IP directly into single CPE reducing Capex and Opex costs. In SD-WAN mode, the Catalyst 8300 Series also prevent internal and external outages using SRST enabling Branch router to assume role of call control PBX for Telephony survivability. They also continue to support the long list of traditional IOS-XE voice use cases like Cisco Unified Border Element (CUBE) Session Border Controller (SBC), Cisco Unified Communications Manager Express (CUCME), Survivable Remote Site Telephony (SRST), ISDN and Voice over IP.

### **Cloud-native agility with a programmable software architecture**

Cisco continues to offer a feature-rich traditional IOS-XE routing stack on the Cisco Catalyst 8300 Series Edge Platforms. IP Routing, IPSec, Quality of Service (QoS), firewall, Network Address Translation (NAT), Network-Based Application Recognition (NBAR), Flexible NetFlow (FNF), and many other features are part of Cisco IOS-XE, a fully programmable software architecture with API support and a wide variety of protocols and configurations. With an integrated software image and a single binary file, you can now choose between Cisco IOS XE SD-WAN and IOS XE. And easily move from one to the other when you choose to do so.

### **LTE and 5G Wireless WAN**

The Cisco Catalyst 8300 Series Edge Platforms are built 5G networks. With the higher throughputs provided by CAT18 LTE and 5G, wireless WAN connections become feasible as primary transports for different use cases. These platforms support both integrated pluggable modules as well as external cellular gateways with LTE or 5G capability for improved throughputs that address all of those use cases. Based on a specific branch's direct line of sight and cellular coverage, this solution provides the flexibility of either using integrated PIM module or an external gateway. The integrated module can work in tandem with a cellular gateway for Active-Active redundancy.

### **Interface flexibility**

#### **Flexible L2 Switching & L3 Routing**

The Cisco Catalyst 8300 Series Edge Platforms support a wide range of NIM based Ethernet modules for a flexible and scalable combination of switched L2 ports and Routed L3 ports. We offer pure L2 switch and L3 routed port module as well as a new module series which combine both capabilities. These new NIM based interface offers options of combined L2 & L3 ports of up to 2.5Gbps mGig with 90 PoE capacity, plus NIM modules with 4-port SFP+ for up to 10Gbps of combined L2 & L3 ports. This not only provides a very high density of L3 ports, but also an unprecedented flexibility for the branch.

---

## **High-density Switching**

The Cisco Catalyst 8300 Series Edge Platforms support high-density Unified Access Data Plane (UADP)-based 22-port and 50-port Layer 2 switch modules. This allows the edge platform to operate as a branch-in-a-box solution with 1G, Cisco Multigigabit Technology (mGig), and 10G ports for downstream switches and devices. The 22-port Layer-2 module is a single-wide module that can be used on both the 1RU and 2RU platforms. The 50-port Layer-2 module is a double-wide module that can be used on the 2RU platforms.

## **Cisco UCS-E compute**

The Cisco Catalyst 8300 Series Edge Platforms will support the Cisco UCS-E M3 modules as well as the new Cisco UCS-E M6 module for branch compute needs. We support both Cisco and third-party Virtual Network Functions (VNFs) on the Cisco Enterprise NFV Infrastructure Software (NFVIS) hypervisor running on the UCS-E compute blade server. Cisco UCS-E M3 modules have 6-, 8-, and 12-core options to choose from based on the number of VNFs that need to be run at the branch. The Cisco UCS-E M6 module is a new, fully up-to-date, compute module built for today's more demanding compute applications. It comes with 3GHz clocked 10-core architecture and 2x 10Gbps connections both internally as well as externally. This will support very effective compute operations while also eliminating any bottlenecks for traffic flowing between the module and the host router.

## **Voice modules**

The Cisco Catalyst 8300 Series Edge Platforms will continue to support a variety of voice modules for the different voice needs at the branch. Voice module examples include Foreign Exchange Station (FXS), Foreign Exchange Office (FXO), Digital Signal Processor (DSP), etc.

## **NEBS (Network Equipment-Building System)**

The Cisco Catalyst 8300 Series Edge Platforms 2RU versions can be made NEBS compliant by choosing the optional PWR-CC1-650WDCR power supplies with reverse airflow. This will automatically include C8300-FAN-2R-R, the NEBS compliant fan assembly, which will make the C8300 system NEBS compliant.

## **Sustainability**

The Cisco Catalyst 8300 Series Edge Platforms are designed ground-up with sustainability in mind. These platforms are standardized on highly efficient power supplies and common form factors for sharing tooling & accessories. We have eliminated use of plastic bezels as well as the need for wet paint, thereby reducing hazardous chemicals, and facilitating recyclability.

All platforms are designed for maximizing efficient use of PCBs and material in motherboard designs and for employing common modules across platforms. Over 70% of the ISR4000 platform family's modules are being reused by the Cisco Catalyst 8300 Series Edge Platforms.

We standardize on integration of features to a single, very power effective, System on a Chip (SoC) architecture across the platform portfolio with dynamic power management plus added power and thermal management capabilities on modules. All platforms furthermore include a barometer to sense atmospheric pressure and estimate installation altitude. Fan speeds can thereby be reduced in installations at lower altitudes, yielding significant energy savings.

## **Throughput Efficiency (Gbps per Watt)**

The use of a single, effective, SoC architecture in the he Cisco Catalyst 8300 Series Edge family provides significantly higher performance per consumed wattage than its predecessors with up to 75% reduction in power per Gbps compared to equivalent ISR4k platform.

## Supported modules

**Table 7.** Modules supported on Cisco Catalyst 8300 Series Edge Platforms

Product number	Description
<b>Ethernet Layer 3 modules</b>	
<b>C-NIM-1X</b>	1-port 10Gbps SFP/SFP+ NIM with WAN MACSec
<b>C-NIM-1M</b>	1-port 2.5/1Gbps RJ-45 WAN, 90W Poe 802.3 af/at/bt NIM
<b>C-NIM-2T</b>	2-port 100Mbps/1Gbps dual-mode RJ45/SFP, NIM with WAN MACSec
<b>LAN modules</b>	
<b>C-NIM-4X</b>	4-port 1/10Gbps SFP/SFP+ switch NIM, LAN/WAN MACSec & Optional L3
<b>C-NIM-8T</b>	8-port 100Mbps/1Gbps switch NIM, LAN/WAN MACSec & Optional L3
<b>C-NIM-8M*</b>	8-port 100M/1/2.5Gbps switch NIM, UPoE, LAN/WAN MACSec & Optional L3
<b>NIM-ES2-4</b>	Cisco 4-port Gigabit Ethernet switch NIM
<b>NIM-ES2-8</b>	Cisco 8-port Gigabit Ethernet switch NIM
<b>NIM-ES2-8-P</b>	Cisco 8-port Gigabit Ethernet switch NIM with PoE support
<b>C-SM-16P4M2X</b>	Cisco 22-port Catalyst L2 switch module with UADP ASIC
<b>C-SM-40P8M2X</b>	Cisco 50-port Catalyst L2 switch module with UADP ASIC
<b>Compute modules</b>	
<b>UCS-E160S-M3/K9</b>	UCS-E, single-wide, Intel Broadwell 6-core CPU; up to 64 GB RAM, 1-2 HDD
<b>UCS-E180D-M3/K9</b>	UCS-E, double-wide, Intel Broadwell 8-core CPU; up to 128 GB RAM, 1-4 HDD
<b>UCS-E1120D-M3/K9</b>	UCS-E, double-wide, Intel Broadwell 12-core CPU; up to 128 GB RAM, 1-4 HDD
<b>UCS-E1100D-M6/K9</b>	UCS-E, double-wide, Intel Icelake 10-core CPU; up to 128 GB RAM, 1-4 SSD
<b>Voice modules</b>	
<b>NIM-2FXO</b>	2-port FXO NIM
<b>NIM-4FXO</b>	4-port FXO NIM
<b>NIM-2FXSP</b>	2-port FXS NIM
<b>NIM-4FXSP</b>	4-port FXS NIM
<b>NIM-2FXSP/4FXOP</b>	2-port FXS and 4-port FXO NIM
<b>NIM-4E/M</b>	4-port E/M NIM

Product number	Description
<b>NIM-2BRI-NT/TE</b>	2-port BRI (NT and TE) NIM
<b>NIM-4BRI-NT/TE</b>	4-port BRI (NT and TE) NIM
<b>SM-X-8FXS/12FXO</b>	8-port FXS and 12-port FXO single-wide service module
<b>SM-X-16FXS/2FXO</b>	16-port FXS and 2-port FXO single-wide service module
<b>SM-X-24FXS/4FXO</b>	24-port FXS and 4-port FXO single-wide service module
<b>SM-X-72FXS</b>	72-port FXS double-wide service module
<b>NIM-PVDM-32</b>	32-channel Voice DSP NIM Module
<b>NIM-PVDM-64</b>	64-channel Voice DSP NIM Module
<b>NIM-PVDM-128</b>	128-channel Voice DSP NIM Module
<b>NIM-PVDM-256</b>	256-channel Voice DSP NIM Module
<b>SM-X-PVDM-3000</b>	3080-channel high-density voice DSP module
<b>SM-X-PVDM-2000</b>	2048-channel high-density voice DSP module
<b>SM-X-PVDM-1000</b>	1024-channel high-density voice DSP module
<b>SM-X-PVDM-500</b>	768-channel high-density voice DSP module
<b>NIM-1MFT-T1/E1</b>	1-port multiflex trunk voice/clear-channel data T1/E1 module
<b>NIM-2MFT-T1/E1</b>	2-port multiflex trunk voice/clear-channel data T1/E1 module
<b>NIM-4MFT-T1/E1</b>	4-port multiflex trunk voice/clear-channel data T1/E1 module
<b>NIM-8MFT-T1/E1</b>	8-port multiflex trunk voice/clear-channel data T1/E1 module
<b>DSL/broadband</b>	
<b>NIM-VAB-A</b>	Multi-mode VDSL2/ADSL2/2/2+ NIM Annex A
<b>NIM-VA-B</b>	Multi-mode VDSL2/ADSL2/2/2+ NIM Annex B
<b>NIM-VAB-M</b>	Multi-mode VDSL2/ADSL2/2/2+ NIM Annex M
<b>NIM-4SHDSL-EA</b>	Multi-mode G.SHDSL NIM
<b>ISDN BRI for Data</b>	
<b>NIM-2BRI-S/T</b>	2-port ISDN BRI WAN interface card for data
<b>NIM-4BRI-S/T</b>	4-port ISDN BRI WAN interface card for data

Product number	Description
<b>Channelized T1/E1 and ISDN PRI</b>	
<b>NIM-1CE1T1-PRI</b>	1-port Multiflex trunk voice/channelized data T1/E1 module
<b>NIM-2CE1T1-PRI</b>	2-port Multiflex trunk voice/channelized data T1/E1 module
<b>NIM-8CE1T1-PRI</b>	8-port Multiflex trunk voice/channelized data T1/E1 module
<b>Serial WAN interface</b>	
<b>SM-X-1T3/E3</b>	1-port clear-channel T3/E3 service module
<b>NIM-1T</b>	1-port serial high-speed WAN interface card
<b>NIM-2T</b>	2-port serial high-speed WAN interface card
<b>NIM-4T</b>	4-port serial high-speed WAN interface card
<b>Async WAN interface</b>	
<b>NIM-16A</b>	16-port Asynchronous Module
<b>NIM-24A</b>	24-port Asynchronous Module
<b>Wireless WAN (LTE)</b>	
<b>P-5GS6-R16SA-GL*</b>	5G Sub-6 GHz Pluggable - 5G SA Global
<b>P-5GS6-GL</b>	5G Sub-6 GHz Pluggable - Global
<b>P-LTEAP18-GL</b>	CAT18 LTE Advanced Pro Pluggable - Global
<b>P-LTEA7-NA*</b>	CAT7 LTE Advanced Pluggable - North America
<b>P-LTEA7-EAL*</b>	CAT7 LTE Advanced Pluggable - EMEA, APAC, and LATAM
<b>P-LTEA7-JP*</b>	CAT7 LTE Advanced Pluggable - Japan
<b>P-LTEA-EA</b>	CAT6 LTE Advanced Pluggable - North America and EMEA
<b>P-LTEA-LA</b>	CAT6 LTE Advanced Pluggable - APAC, ANZ, and LATAM
<b>NIM-LTEA-EA</b>	CAT6 LTE Advanced - North America and EMEA
<b>NIM-LTEA-LA</b>	CAT6 LTE Advanced - APAC, ANZ, and LATAM
<b>NIM Carrier Adapter Card</b>	
<b>C-SM-NIM-ADPT</b>	Single-wide 2x NIM carrier module in SM-X form factor

\* Supported with IOS XE release 17.12.2.

## Memory, storage, and accessory options

**Table 8.** Cisco Catalyst 8300 Series memory, storage, and accessory options

Product number	Description
<b>MEM-C8300-8GB</b>	Cisco C8300 Edge Platform - 8 GB Memory
<b>MEM-C8300-16GB</b>	Cisco C8300 Edge Platform - 16GB Memory
<b>MEM-C8300-32GB</b>	Cisco C8300 Edge Platform - 32GB Memory
<b>M2USB-16G</b>	Cisco C8000 Edge Platform - 16G M.2 USB SSD Storage
<b>M2USB-32G</b>	Cisco C8000 Edge Platform - 32G M.2 USB SSD Storage
<b>SSD-M2NVME-600G</b>	Cisco C8000 Edge Platform - 600G M.2 NVMe SSD Storage
<b>SSD-M2NVME-2T</b>	Cisco C8000 Edge Platform - 2T M.2 NVMe SSD Storage
<b>C8300-RM-19-1R</b>	Cisco C8300 1RU Edge Platform - Rack Mount kit - 19"
<b>C8300-RM-23-1R</b>	Cisco C8300 1RU Edge Platform - Rack Mount kit - 23"
<b>C8300-RM-19-2R</b>	Cisco C8300 2RU Edge Platform - Rack Mount kit - 19"
<b>C8300-RM-23-2R</b>	Cisco C8300 2RU Edge Platform - Rack Mount kit - 23"
<b>C8300-RM-4PT-1R</b>	Cisco C8300 1RU Edge Platform - 4-post Rack Mount kit - 19"
<b>C8300-RM-4PT-2R</b>	Cisco C8300 2RU Edge Platform - 4-post Rack Mount kit - 19"
<b>C8300-FAN-1R</b>	Cisco C8300 1RU Edge Platform - Fan Tray Assembly
<b>C8300-FAN-2R</b>	Cisco C8300 2RU Edge Platform Fan Tray Assembly
<b>C8300-FAN-2R-R</b>	Cisco C8300 2RU Edge Platform Reverse Airflow Fan Tray Assembly for NEBS
<b>C-RFID-1R</b>	Cisco C8300 1RU Edge Platform - RFID
<b>C-RFID-2R</b>	Cisco C8300 2RU Edge Platform - RFID
<b>C8300-SM-BLANK</b>	Cisco C8300 SM Blank
<b>C8300-NIM-BLANK</b>	Cisco C8300 NIM Blank
<b>C8300-PIM-BLANK</b>	Cisco C8300 PIM Blank

The fan tray is shipped default with the Cisco Catalyst 8300 Edge Series Platforms.

## Optics and transceivers modules

Find a full list of optics and transceivers [here](#).

## Resiliency and high availability

Platform redundancy is critical for branch operations, as any downtime has direct impact to a customer's business. To address that priority, Cisco makes a dual power supply default on all the Catalyst 8300 platforms to ensure that there is always a backup power supply module in case the primary power supply fails.

## Power supplies

### Important notice:

To address the precarious component situation during the pandemics, Cisco shipped PWR-CC1-400WAC as a temporary substitute power supply in place of the current 250-watt power supply, PWR-CC1-250WAC, used on our Catalyst 8300 1RU platforms. PWR-CC1-400WAC is no longer shipped with our Catalyst 8300 1RU platforms but retains the same support as the PWR-CC1-250WAC power supply.

For more information this, previous, temporary measure, please visit <https://www.cisco.com/c/en/us/products/collateral/routers/catalyst-8300-series-edge-platforms/catalyst-8300-series-pb.html>.

**Table 9.** Cisco Catalyst 8300 1RU edge platform power supply specifications

Power supply feature	PWR-CC1-250WAC	PWR-CC1-400WAC*	PWR-CC1-500WAC	PWR-CC1-400WDC	PWR-CC1-400WHV
Power maximum rating	250W	250W	500W PoE (Yes) PoE Budget: 250W	400W	400W
Input-voltage range and frequency	100 to 240 VAC 50 - 60 Hz	100 to 240 VAC 50 - 60 Hz	100 to 240 VAC 50 - 60 Hz	DC: -40 to -72V	DC: 240 - 380V
Power supply efficiency	80 Plus Silver	80 Plus Silver	80 Plus Silver	85 %	80 Plus Platinum
Input current	3A - 1.25A	6A - 3A	6 A - 2.5A	13 A - 7.25 A	1.75 A - 1.1 A
Output ratings	12V 21A	12V 33A	12V 21A 54 V - 4.5 A	12 V 33.5 A	12V 54A
Output holdup time	20ms	20ms	20ms	2 ms	20ms
Power supply input receptacles	IEC 320 C14	IEC 320 C14	IEC 320 C14	Terminal block	Saf-D-Grid
Power cord rating	5A	10A	10A	15 A # 14 wire	5A

\*See Important Notice above

**Table 10.** Cisco Catalyst 8300 2RU edge platform power supply specifications

Power supply feature	PWR-CC1-650WAC	PWR-CC1-1000WAC	PWR-CC1-650WDC	PWR-CC1-650WDCR (NEBS)
Power maximum rating	650W	1000W PoE (Yes) PoE Budget: 500W	650W	650W
Input-voltage range and frequency	100 to 240 VAC 50 - 60 Hz	100 to 240 VAC 50 - 60 Hz	DC: -40 to -72V	DC: -40 to -72V
Power supply efficiency	80 Plus Gold	80 Plus Gold	80 Plus Gold	80 Plus Gold
Input current	7.2 A - 3 A	11.5 A - 4.63 A	18 A - 10 A	18 A - 10 A
Output ratings	12V 54A	12V 83A	12 V54 A	12 V 54 A
Output holdup time	20ms	20ms	4 ms	4 ms
Power supply input receptacles	IEC 320 C14	IEC 320 C14	Terminal block	Terminal block
Power cord rating	10A	12A	20 A # 14 wire	20 A # 14 wire

**Table 11.** Cisco Catalyst 8300 Edge platform Typical power consumption

Power consumption, no modules, single PSU	C8300-2N2S-4T2X	C8300-1N1S-4T2X	C8300-2N2S-6T	C8300-1N1S-6T
Typical power (watts)	275W	245W	89W	82W

**RFID tags:** Catalyst 8300 Series Edge Platforms have an embedded RFID tag that holds Serial Number and Product ID for easy asset and inventory management using commercial RFID readers. The RFID tag is external and can be easily removed if needed or can be unselected at the time of ordering.



## Software requirements

Cisco DNA Software for the Catalyst 8300 Series offers comprehensive solutions for enterprise branch networks.

**Table 12.** Catalyst 8300 Series minimum software requirements

Platform Product ID (PID)	Description	Minimum software requirement
<b>C8300-2N2S-4T2X</b> <b>C8300-1N1S-4T2X</b> <b>C8300-2N2S-6T</b> <b>C8300-1N1S-6T</b>	Cisco Catalyst 8300 Series Edge Platforms	Cisco IOS XE Software Release 17.3.2

## Software features

Catalyst 8300 Series features for autonomous mode and for SD-WAN.

**Table 13.** Catalyst 8300 Series Software features and protocols for autonomous mode

Feature	Description
<b>Protocols</b>	IPv4, IPv6, static routes, Routing Information Protocol Versions 1 and 2 (RIP and RIPv2), Open Shortest Path First (OSPF), Enhanced Interior Gateway Routing Protocol (EIGRP), Border Gateway Protocol (BGP), BGP Router Reflector, Intermediate System-to-Intermediate System (IS-IS), Multicast Internet Group Management Protocol Version 3 (IGMPv3), Protocol Independent Multicast Sparse Mode (PIM SM), PIM Source-Specific Multicast (SSM), Resource Reservation Protocol (RSVP), Cisco Discovery Protocol, Encapsulated Remote Switched Port Analyzer (ERSPAN), Cisco IOS IP Service-Level Agreements (IPSLA), Call Home, Cisco IOS Embedded Event Manager (EEM), Internet Key Exchange (IKE), Access Control Lists (ACL), Ethernet Virtual Connections (EVC), Dynamic Host Configuration Protocol (DHCP), Frame Relay, DNS, Locator ID Separation Protocol (LISP), Hot Standby Router Protocol (HSRP), RADIUS, Authentication, Authorization, and Accounting (AAA), Application Visibility and Control (AVC), Distance Vector Multicast Routing Protocol (DVMRP), IPv4-to-IPv6 Multicast, Multiprotocol Label Switching (MPLS), Layer 2 and Layer 3 VPN, IPsec, Layer 2 Tunneling Protocol Version 3 (L2TPv3), Bidirectional Forwarding Detection (BFD), IEEE 802.1ag, and IEEE 802.3ah
<b>Encapsulations</b>	Generic Routing Encapsulation (GRE), Ethernet, 802.1q VLAN, Point-to-Point Protocol (PPP), Multilink Point-to-Point Protocol (MLPPP), Frame Relay, Multilink Frame Relay (MLFR) (FR.15 and FR.16), High-Level Data Link Control (HDLC), Serial (RS-232, RS-449, X.21, V.35, and EIA-530), and PPP over Ethernet (PPPoE)
<b>Traffic management</b>	Quality of Service (QoS), Class-Based Weighted Fair Queuing (CBWFQ), Weighted Random Early Detection (WRED), Hierarchical QoS, Policy-Based Routing (PBR), Performance Routing (PfR), and Network-Based Application Recognition (NBAR)
<b>Cryptographic algorithms</b>	Encryption: DES, 3DES, AES-128 or AES-256 (in CBC and GCM modes) Authentication: RSA (748/1024/2048 bit), ECDSA (256/384 bit) Integrity: MD5, SHA, SHA-256, SHA-384, SHA-512

Feature	Description
<b>Unified Communication</b>	Call Admission Control (CAC), Cisco Unified Border Element (CUBE) Session Border Controller(SBC), Cisco Unified Communications Manager Express (CUCME), ISDN, RADIUS, RFC4040 based Clear Channel codec signaling with SIP, Resource Reservation Protocol (RSVP), RTP Control Protocol (RTCP), Session Initiation Protocol for VoIP(SIP), Survivable Remote Site Telephony (SRST), Secure Real-time Transport Protocol(SRTP), and Voice modules

**Table 14.** Catalyst 8300 Series Software features and protocols for controller (SD-WAN) mode

Feature	Description
<b>Core Features</b>	IPv4, IPv6, static routes, Open Shortest Path First (OSPF), Enhanced Interior Gateway Routing Protocol (EIGRP), Border Gateway Protocol (BGP), Overlay Management Protocol (OMP), Application Aware Routing (AAR), Traffic Engineering Service Insertion, zero-trust, whitelisting, tamper-proof module, DTLS/TLS, IPsec, classification, prioritization, low latency queuing, remarking, shaping, scheduling, policing, mirroring, Multicast IPv4 Support, Service advertisement and inserpolicy, SNMP, NTP, DNS client, Dynamic Host Configuration Protocol (DHCP), DHCP client, DHCP server, DHCP relay, Syslog, SSH, SCP, Cisco FlowD v10 IPFIX export, IPv6 for transport-side, VRRP, MPLS, NAT (DIA, Service-side, overload/PAT, NAT64, etc), NAT pools, split DNS, Access Control Lists (ACL), Bidirectional Forwarding Detection (BFD) over SSH, CLI, NTP server support, BFD with service-side BGP, BGP community propagation to OMP, 6 SLA for AAR, Trustsec/SDA (Inline SGT propagation), custom app with SD-AVC, multicast AAR, dynamic on-demand tunnel, OSPFv3, route policies, Multi-VRF support
<b>Encapsulations</b>	Generic Routing Encapsulation (GRE), Ethernet, 802.1q VLAN
<b>Application Experience</b>	Quality of service (QoS), Forward Error Correction (FEC), COS Marking, Weighted Random Early Detection (WRED) Hierarchical QoS, Policy-Based Routing (PBR), Network-Based Application Recognition (NBAR), Software Defined Access (SD-AVC), per tunnel QoS, Cloud onRamp for SaaS, Enhanced Office 365 traffic steering, Direct Access, Flexible Netflow (FnF)
<b>Cryptographic Algorithms</b>	Encryption: AES-256 (in CBC and GCM modes), Internet Key Exchange (IKE), Cisco PKI Authentication: AAA, RSA (2048 bit), ESP-256-CBC, HMAC-SHA1, ECDSA (256/384 bit) Integrity: SHA-1, SHA-2
<b>Security</b>	Built-in end-to-end segmentation (VPNs), ZBFW, PKI, Cisco DNA Layer Security, Snort IPS/IDS, URL Filtering, Advanced Protection (AMP), ThreatGrid (TG), ALG for ZBFW
<b>Unified Communication</b>	Cisco Unified Border Element (CUBE), Survivable Remote Site Telephony (SRST), Cisco Unified Communications Manager Express (CUCME) and Voice Modules

---

## Licensing

All Cisco Catalyst 8300 Series Edge Platforms are offered only with a Cisco DNA Software subscription, Enterprise Agreement, and Managed Service Licensing Agreement (MSLA). For more details, refer to this [licensing guide](#).

Cisco DNA stack:

- Cisco DNA Essentials
- Cisco DNA Advantage
- Cisco DNA Premier

Network stack:

- Network Essentials
- Network Advantage

## Cisco Smart Licensing

Cisco Smart Licensing is a flexible licensing model that provides you with an easier, faster, and more consistent way to purchase and manage software across the Cisco portfolio and across your organization. And it's secure – you control what users can access. With Smart Licensing you get:

- **Easy Activation:** Smart Licensing establishes a pool of software licenses that can be used across the entire organization—no more PAKs (Product Activation Keys).
- **Unified Management:** My Cisco Entitlements (MCE) provides a complete view into all of your Cisco products and services in an easy-to-use portal, so you always know what you have and what you are using.
- **License Flexibility:** Your software is not node-locked to your hardware, so you can easily use and transfer licenses as needed.

To use Smart Licensing, you must first set up a Smart Account on Cisco Software Central ([software.cisco.com](https://software.cisco.com)).

For a more detailed overview on Cisco Licensing, go to [cisco.com/go/licensingguide](https://cisco.com/go/licensingguide).

## Specifications

**Table 15.** Mechanical specifications

Description	Specification	
<b>Part number</b>	C8300-2N2S-4T2X C8300-2N2S-6T	C8300-1N1S-4T2X C8300-1N1S-6T
<b>Dimensions (H x W x D)</b>	3.5 in. x 17.25 in. x 18.52 in.	1.73 in. x 17.50 in. x 16.25 in.
<b>Rack Units (RU)</b>	2RU	1RU
<b>Chassis weight with 2X AC power supplies and fan tray</b>	40 lbs	20 lbs
<b>Acoustics: Sound pressure (Typical/maximum)</b>	59 dBa/73 dBa (Non-NEBS) 63 dBa/75 dBa (NEBS)	49 dBa/71 dBa
<b>Acoustics: Sound power (Typical/maximum)</b>	74 dBa/87 dBa (Non-NEBS) 77 dBa/89 dBa (NEBS)	60 dBa/82 dBa
<b>Input voltage</b>	AC: 85 to 264 VAC DC: -40 to 72V; 48V nominal	
<b>Operating temperature</b>	32 to 104° F (0 to 40° C)	
<b>Storage temperature</b>	-40 to 150° F (-40 to 70° C)	
<b>Relative humidity operating and nonoperating noncondensing</b>	Ambient (noncondensing) operating: 5 to 85% Ambient (noncondensing) nonoperating and storage: 5 to 95%	
<b>Altitude</b>	0 to 10,000 feet (0 to 3050 meters)	
<b>Mean Time Between Failures (MTBF)</b>	710,300 hours	536,060 hours

**Table 16.** Safety and compliance

Description	Specification
<b>Safety certifications</b>	UL 60950-1 CAN/CSA-C22.2 No. 60950-1 EN 60950-1 IEC 60950-1 AS/NZS 60950-1 IEC/EN 60825 Laser Safety FDA: Code of Federal Regulations Laser Safety
<b>EMC (Emissions)</b>	47 CFR Part 15 Class A ICES 003 Class A AS/NZS CISPR 32 Class A CISPR 32 Class A EN55032 Class A VCCI-CISPR 32 Class A CNS-13438 Class A KN32 Class A IEC/EN 61000-3-2: Power Line Harmonics IEC/EN 61000-3-3: Voltage Fluctuations and Flicker
<b>EMC (Immunity)</b>	IEC/EN-61000-4-2: Electrostatic Discharge Immunity IEC/EN-61000-4-3: Radiated Immunity IEC/EN-61000-4-4: Electrical Fast Transient Immunity IEC/EN-61000-4-5: Surge AC, DC, and Signal Ports IEC/EN-61000-4-6: Immunity to Conducted Disturbances IEC/EN-61000-4-8: Power Frequency Magnetic Field Immunity IEC/EN-61000-4-11: Voltage DIPS, Short Interruptions, and Voltage Variations KN35
<b>EMC (ETSI/EN)</b>	EN300 386: Telecommunications Network Equipment (EMC) EN55032: Multimedia Equipment (Emissions) EN55024: Information Technology Equipment (Immunity) EN55035: Multimedia Equipment (Immunity) EN61000-6-1: Generic Immunity Standard

---

## Services

### **Cisco Customer Experience Support Services for Catalyst 8000 platforms and Cisco DNA Software for SD-WAN and Routing**

This section discusses the Cisco Support Services available for Catalyst 8000 platforms and associated Cisco DNA Software for SD-WAN and Routing, as well as optional Support Service offers.

- **Catalyst 8000 platforms:** Cisco Solution Support is the default and recommended Cisco Support Service. However, Cisco Solution Support is not mandatory; it can be removed or replaced with another Cisco support service or partner service per the customer's preference.
- **Cisco DNA Software for SD-WAN and Routing:** Cisco Solution Support is the default Cisco support service. However, Cisco Solution Support is not mandatory; the customer may choose to use the Cisco Subscription Embedded Software Support included with the purchase of this software.

#### **Note:**

- When Solution Support is selected, it must be ordered on both the Catalyst 8000 platform and Cisco DNA Software for SD-WAN and Routing for complete customer entitlement to this premium support service.
- SD-WAN and Routing, with both Solution Support or Cisco Subscription Embedded Software Support, customers are entitled to maintenance releases and software updates for **Cisco DNA SD-WAN and Routing software only**. The support for the Catalyst 8000 platform's OS and network stack, along with OS updates, is covered by the support contract on the Catalyst 8000 platform.

#### **Cisco Solution Support is a premium support purpose-built for today's multiproduct, multivendor network environments and provides:**

- A primary point of contact centralizing support across a solution deployment
- Solution, product, and interoperability expertise
- No requirement for customers to isolate their issue to a product to open a case
- 30-minute service response objective for Severity 1 and 2 cases
- Prioritized case handling over product support cases
- Product support team coordination (Cisco and Solution Support Alliance Partners)
- Accountability for multiproduct, multivendor issue management from first call to resolution, no matter where the issue resides

Learn more about Cisco Solution Support at [www.cisco.com/go/solutionsupport](http://www.cisco.com/go/solutionsupport).

## Cisco Subscription Embedded Software Support includes:

- Access to support and troubleshooting via online tools and web case submission. Case severity or escalation guidelines are not applicable.
- Cisco Technical Assistance Center (TAC) access 24 hours per day, 7 days per week to assist by telephone, or web case submission and online tools with application software use and troubleshooting issues.
- Access to [www.cisco.com](http://www.cisco.com), providing helpful technical and general information on Cisco products, as well as access to Cisco's online Software Center library.

**Note:** No additional products or fees are required to receive embedded support for Cisco DNA Software for SD-WAN and Routing. However, if using embedded support for this software, hardware support for the Catalyst 8000 platforms must be purchased separately, as Cisco Subscription Embedded Software Support does not cover hardware. In this case, Cisco Smart Net Total Care Service is recommended for Catalyst 8000 platforms.

## Cisco Capital

### Flexible payment solutions to help you achieve your objectives

Cisco Capital makes it easier to get the right technology to achieve your objectives, enable business transformation and help you stay competitive. We can help you reduce the total cost of ownership, conserve capital, and accelerate growth. In more than 100 countries, our flexible payment solutions can help you acquire hardware, software, services and complementary third-party equipment in easy, predictable payments.

[Learn more.](#)

## Ordering information

To place an order, visit the [Cisco Ordering Home Page](#). To download software, visit the [Cisco Software Center](#).

## For more information

For more information about the Cisco Catalyst 8300 Series Edge Platforms, visit <https://www.cisco.com/go/C8300> or contact your local Cisco account representative.

## Document history

New or revised topic	Described In	Date
Describing why a new 400W PSU is added toC8300	Power supplies	September 21, 2022
Added column with technical specs for new400W PSU	Power supplies, Table 6	September 21, 2022

Americas Headquarters  
Cisco Systems, Inc.  
San Jose, CA

Asia Pacific Headquarters  
Cisco Systems (USA) Pte. Ltd.  
Singapore

Europe Headquarters  
Cisco Systems International BV Amsterdam,  
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at <https://www.cisco.com/go/offices>.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)